


MOBILE HOME SKIRTING DETAIL

Clark County
Dept. of Building & Fire Prevention
4701 W Russell Rd
Las Vegas, NV 89118
(702) 455-3000

Boulder City
Building Department
401 California Avenue
Boulder City, NV 89005
(702) 293-9282


Henderson
Bldg & Fire Safety Dept.
240 Water Street
Henderson, NV 89015
(702) 267-3650

Las Vegas
Building & Safety Dept.
333 N. Rancho Drive
Las Vegas, NV 89106
(702) 229-6251

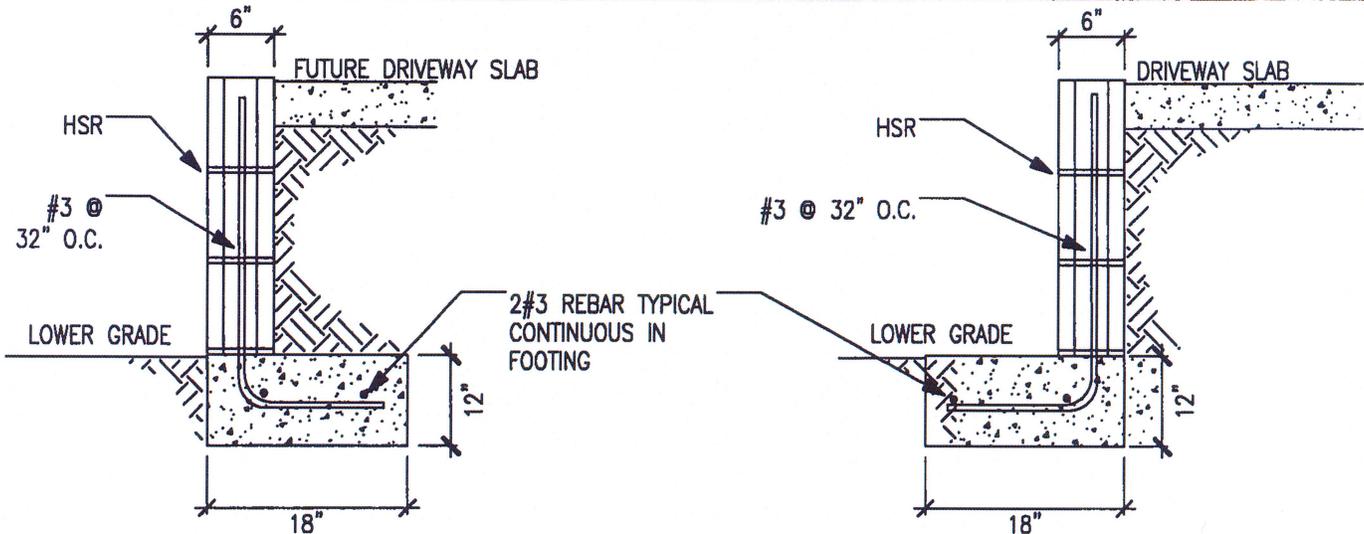

RETAINING WALL FOR DRIVEWAY SIDE IF SLAB HAS NOT BEEN POURED

RETAINING WALL FOR DRIVEWAY SIDE IF SLAB HAS BEEN POURED

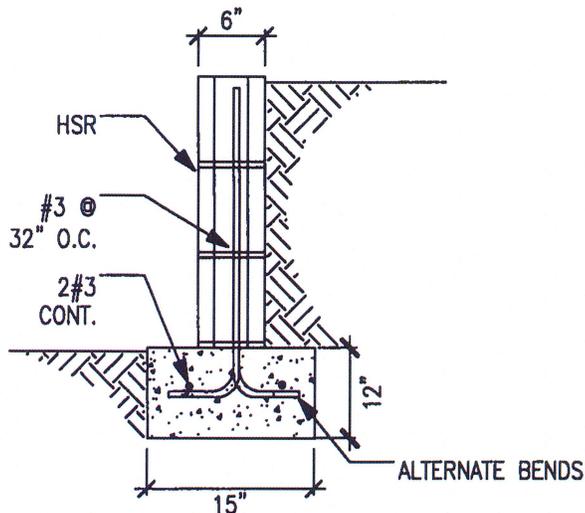

NO DRIVEWAY, WALL CENTERED ON FOOTING

- 2012 IBC
- 2 FT. MAXIMUM (3 BLOCKS HIGH)
- NOT TO BE ATTACHED TO OR SUPPORT MOBILE HOME
- HSR—HORIZONTAL STEEL REINFORCING TO BE 9 GAUGE LADDER WIRE IN MORTAR JOINT OR #3 REBAR IN BOND BEAM
- MINIMUM 3" CONCRETE COVER OVER REBAR
- ALL CELLS WITH REBAR TO BE GROUTED SOLID
- CONCRETE $f'_c = 4,500$ PSI, TYPE V CEMENT
- CONCRETE MASONRY CONFORMS TO ASTM C90, $f'_m = 1,500$ PSI
- MORTAR: TYPE M - 2,500 PSI OR TYPE S - 1,800 PSI
- GROUT CONFORMS TO ASTM C476, MINIMUM 2,000 PSI
- REINFORCING STEEL GRADE 60 ASTM A615

- ASSUMED SOIL BEARING PRESSURE IS 1000 PSF, LATERAL EARTH PRESSURE IS 45 PSF/FT

INSPECTIONS REQUIRED
1. FOOTINGS PRIOR TO PLACING CONCRETE
2. WALL STEEL PRIOR TO GROUTING
3. FINAL INSPECTION AFTER COMPLETION

OWNER _____
PROJECT ADDRESS _____

Mesquite
Building Department
10 East Mesquite Blvd.
Mesquite, NV 89027
(702) 346-2835

North Las Vegas
Building Department
2250 Las Vegas Blvd. N
N. Las Vegas, NV 89030
(702) 633-1577

Pahrump
Building & Fire Safet Dept.
250 N Hwy 160 Suite #3
Pahrump, NV 89060
(775) 751-3373