SOUTHERN NEVADA BUILDING OFFICIALS REGIONAL STANDARDS

B-111 6-24-08 PG. 1 OF 1

MOBILE HOME SKIRTING DETAIL

Clark County

Dept. of Develop. Services 4701 W Russell Rd Las Vegas, NV 89118 (702) 455-3000

Boulder City


Building Department 401 California Avenue Boulder City, NV 89005 (702) 293-9282

Henderson


Bldg & Fire Safety Dept. 240 Water Street Henderson, NV 89015 (702) 267-3650

Las Vegas

Building & Safety Dept. 731 S. 4th Street Las Vegas, NV 89101 (702) 229-6916

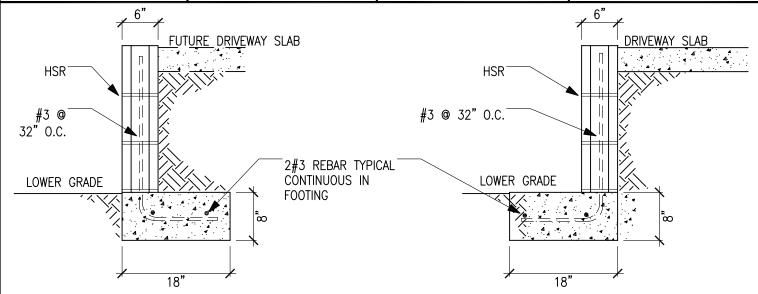

RETAINING WALL FOR DRIVEWAY SIDE IF SLAB HAS NOT BEEN POURED

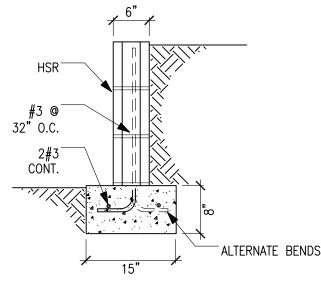

RETAINING WALL FOR DRIVEWAY SIDE IF SLAB HAS BEEN POURED

- NOT TO BE ATTACHED TO OR SUPPORT MOBILE HOME
- HSR-HORIZONTAL STEEL REINFORCING TO BE 9 GAUGE LADDER WIRE IN MORTAR JOINT OR #3 REBAR IN BOND BEAM
- MINIMUM 3" CONCRETE COVER OVER REBAR
- ALL CELLS WITH REBAR TO BE GROUTED SOLID
- GROUT PROPORTIONS: 1 PART CEMENT, 3 PARTS SAND, 2 PARTS PFA GRAVFI
- MORTAR PROPORTIONS; 1 PART CEMENT, 1/2 PART LIME, 4 1/2 PARTS SAND
- CONCRETE MINIMUM 2000 PSI
- CONCRETE BLOCK TO BE GRADE N

NO DRIVEWAY, WALL CENTERED ON FOOTING

ASSUMED SOIL BEARING PRESSURE IS 1000 PSF

INSPECTIONS REQUIRED

- 1. FOOTINGS PRIOR TO PLACING CONCRETE
- 2. WALL STEEL PRIOR TO GROUTING
- FINAL INSPECTION AFTER COMPLETION

| OWNER | |
|-----------------|--|
| PROJECT ADDRESS | |
| | |

Mesquite

Building Department 10 East Mesquite Blvd. Mesquite, NV 89027 (702) 346-2835

North Las Vegas

Building Department 2240 Civic Center Drive N. Las Vegas, NV 89030 (702) 633-1577

Pahrump

Regional Planning District 1210 E. Basin Avenue, Suite #1 Pahrump, NV 89060 (775) 751-3373