

Clark County Traffic Control Guide and Sign Designation Manual



Table of Contents

Sign Background Color	
Chapter 2A	Enhanced Conspicuity
Chapter 2B	Regulatory
NDOT	Regulatory
Chapter 2C	Warning
NDOT	Warning
Chapter 2D	Guide - Conventional Roads
Chapter 2E	Guide - Controlled Access
NDOT	Guide - Controlled Access
	Overhead Sign Info
Chapter 2G	Preferential and Managed Lanes
Chapter 2H	General Information
Chapter 2I	Service
NDOT	Service
Chapter 2M	Recreational
Chapter 2N	Emergency Management
Chapter 6	Construction
Part 7	Schools
	School Typical Layouts
Part 8	Railroad and Light Rail
Part 9	Bike Facilities
Section 11	Trails
Section 12	Non-Roadway Signs

Note:

**Clicking on the County Logo
will return you to this page.**



Table of Contents

	Section 13	Replace when found
	Section 14	Incorrect Curve/Turn Warning Signs
	Section 15	Signs to be removed
	Section 16	Signs to be upgraded when replaced
	Section 17	Las Vegas Strip only
	Section 20	Sign Post Information and Wind Loadings
	Section 21	Pavement Marking and RPM layouts
	Section 22	Permanent Barricades
	Section 30	Special Lane Patterns
	Section 31	Controlled Access Facilities Striping
	Section 32	Shift and Taper Info
	Section 33	Sign Type Determination



Sign Background Color



Black



Red




Blue



White



Brown



Yellow or
Fluorescent Yellow



Green



Purple



Orange



Fluorescent Orange



Fluorescent Pink



Fluorescent Yellow-Green

NOTE:

1. Only those signs designated in this Manual and the MUTCD may be Fluorescent Yellow-Green background in place of the standard Yellow background.
2. Yellow and Fluorescent Yellow-Green background signs and plates may not be mixed on the same assembly.
3. Fluorescent Orange is required for all Orange except for barricades.



Clark County


Enhanced

Conspicuity





Chapter 2A

Enhanced Conspicuity

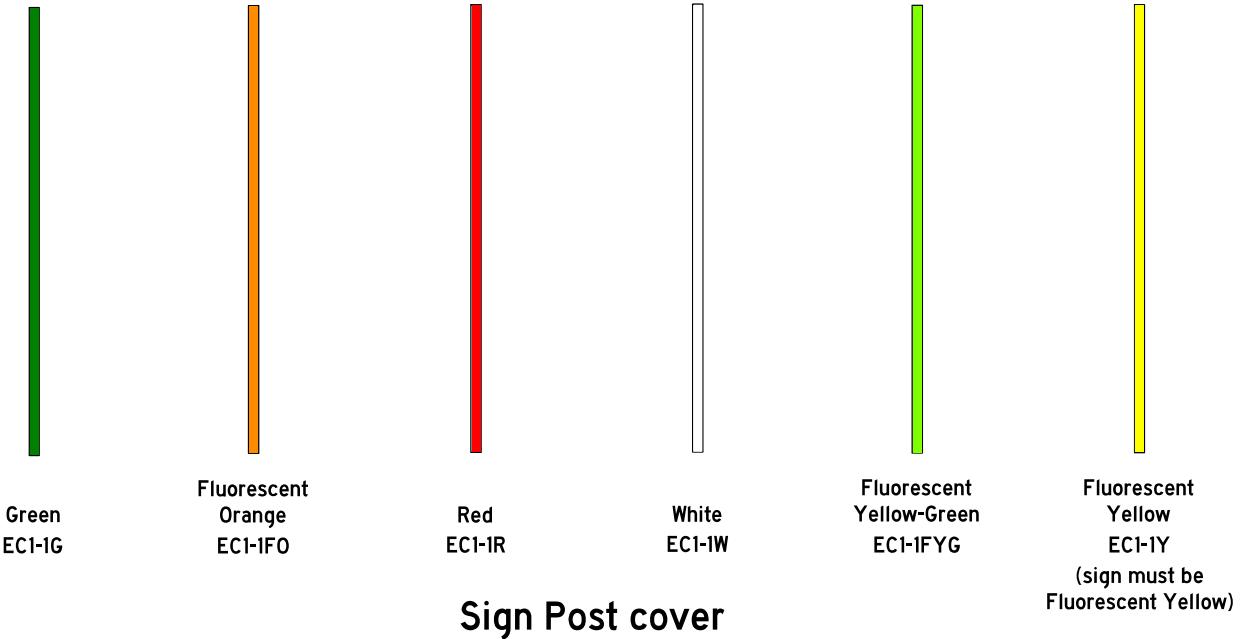

Sign Post cover

Cover shall match background of sign

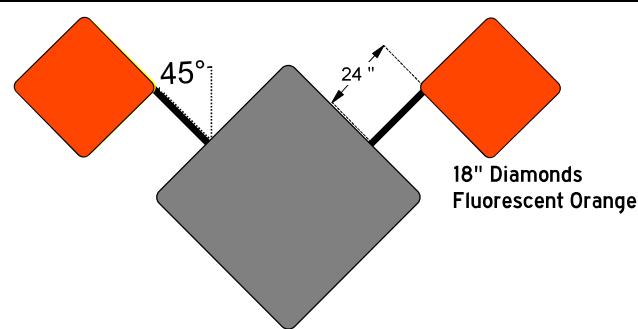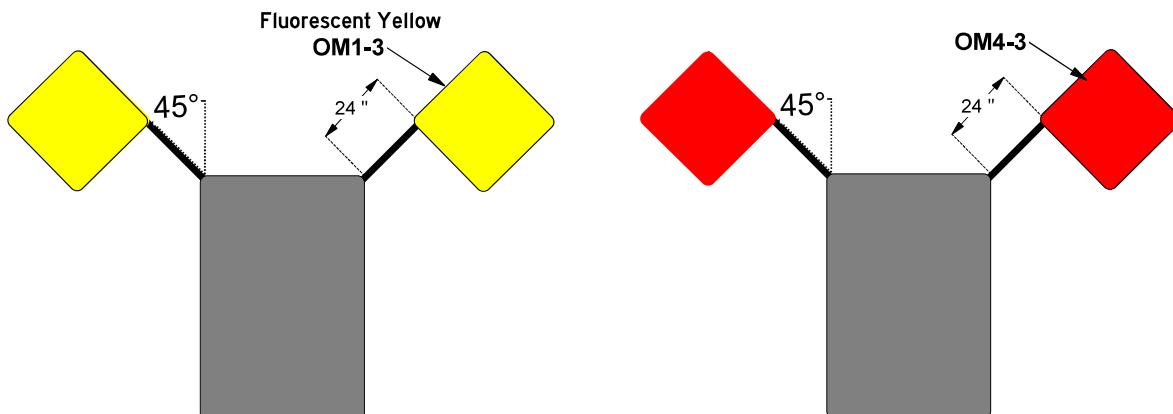



Construction Work Zones ONLY

EC2-3



Chapter 2A Enhanced Conspicuity



Page 2 of 2

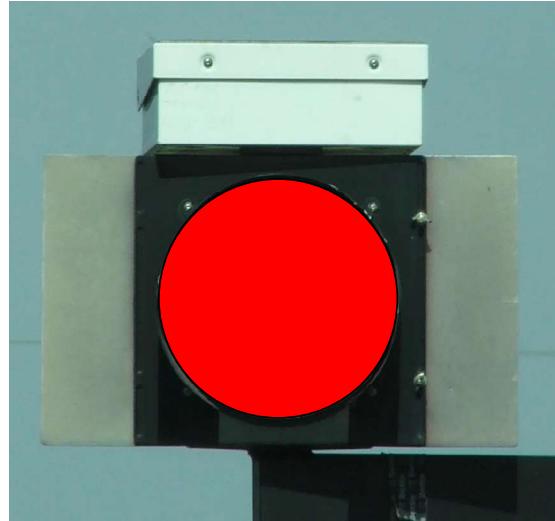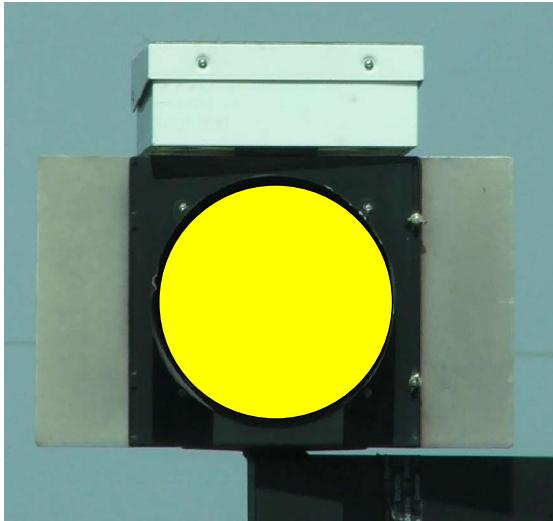

(Round Batteries)

SB1-1Y



SB1-1R

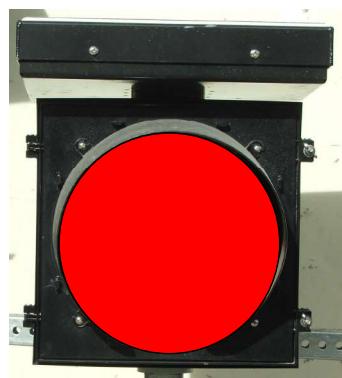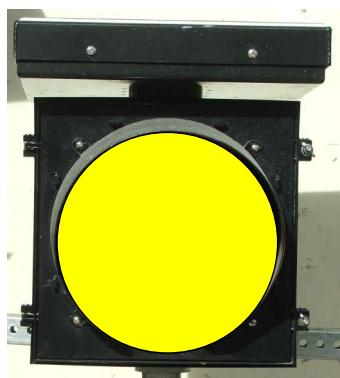

(1 Rectangular Battery)

SB1-2Y

SB1-2R

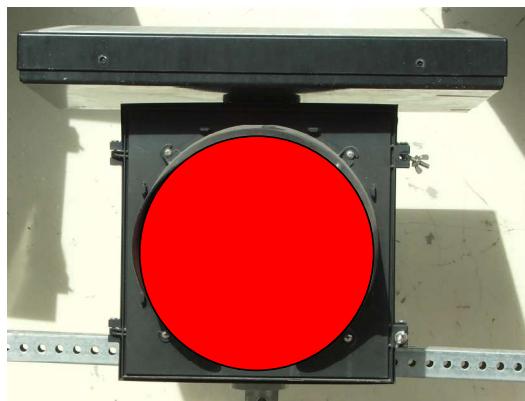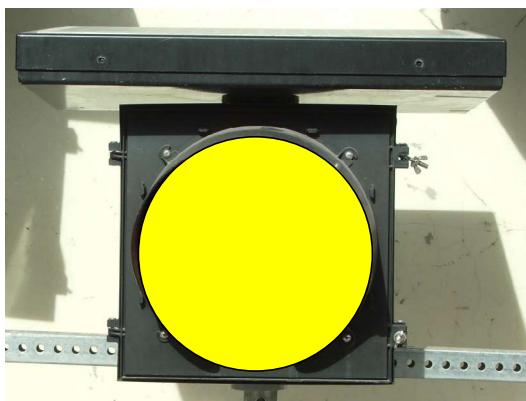

(2 Rectangular Batteries)

SB1-3Y

SB1-3R

Page 2A-2



2B - Regulatory



Chapter 2B Regulatory

Page 1 of 3

	R1-1		R2-1 25		R2-11	 	R3-5fP R3-5gP
	R1-1a		R2-1 30		R2-90	 	R3-5wP R3-5xP
	R1-2		R2-1 35		R2-98	 	R3-5yP R3-5zP
	R1-3P		R2-1 40		R2-99		R3-8L
	R1-2aP		R2-1 45		R3-1		R3-8R
	R1-10P		R2-1 50		R3-2		R3-8aL
	R1-5R		R2-1 55		R3-3		R3-8aR
	R1-5L		R2-1 60		R3-4		R3-8b
	R1-5aR		R2-1 65		R3-18		R3-80a
	R1-5aL		R2-4 25		R3-27		R3-80b
	R1-5bR		R2-4 30		R3-5L		R3-80c
	R1-5bL		R2-4 35		R3-5R		R3-81a
	R1-5cR		R2-4 40		R3-5a		R3-81b
	R1-5cL		R2-4 45		R3-5U		R3-81c
	R1-6		R2-4 50		R3-6L		R3-81d
	R1-6		R2-4 55		R3-6R		R3-82a
	R2-6				R3-7L		R3-82b
	R2-6a				R3-7R		R3-82a
	R2-10			 	R3-5bP R3-5eP		R3-90a R3-90b

* More lane use signs in NDOT section.

Chapter 2B
Regulatory

Page 2 of 3

	R3-91a		R4-8a		R5-10c		R7-8
	R3-91b		R4-8b		R5-11		R7-8a
	R3-11z		R4-8c		R5-98		R7-9a
	R3-20L		R4-9		R9-3		R7-94
	R3-20R		R4-13		R6-1L		R7-94L
	R3-33		R4-16		R6-1R		R7-94R
	R3-9a		R4-17		R6-2L		R7-95
	R3-9b		R4-18		R6-2R		R7-95L
	R3-9cP		R4-99		R6-3		R7-95R
	R3-9dP		R5-1		R6-3a		R7-107a
	R4-1		R5-1a		R6-6		R7-107aL
	R4-2		R5-2		R6-7		R7-107aR
	R4-3		R5-3		R6-4		R7-240
	R4-5		R5-4		R6-4a		R8-3
	R4-7		R5-6		R6-4b		R8-3cP
	R4-7a		R5-7		R6-5P		R8-3dP
	R4-7b		R5-8		R7-1a		R8-3eP
	R4-7c		R5-10a		R7-1aL		
	R4-8		R5-10b		R7-1aR		



Chapter 2B
Regulatory





Page 3 of 3

	R8-3fP																																																																										Type 3L RW	Type 3R RW
--	--------	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	------------	------------



NDOT - Regulatory

Page 1 of 1

	RNV1-3		RNV3-1		RNV3-17		RNV7-1
	RNV2-1		RNV3-2		RNV3-17a		RNV16-1
	RNV2-2		RNV3-3		RNV3-18		RNV17-1
	RNV2-3		RNV3-4		RNV3-19		RNV19-1
	RNV2-4		RNV3-5		RNV3-20		
	RNV2-5		RNV3-6		RNV3-21		
	RNV2-6		RNV3-7		RNV3-22		
	RNV2-7		RNV3-8		RNV3-23		
	RNV2-8		RNV3-9		RNV3-24		
	RNV2-9		RNV3-10		RNV4-2		
* 	RNV2-10		RNV3-11				
	RNV2-11		RNV3-12				
	RNV2-13		RNV3-13				
	RNV2-14		RNV3-14				
			RNV3-15				
			RNV3-16				

* Standard Dual Left Turn sign for mast arm.

Page 2B-4



Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 1 of 6)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Stop	R1-1	2B.04	30 x 30	36 x 36	36 x 36	—	30 x 30*	48 x 48
Yield	R1-2	2B.05	36 x 36 x 36	48 x 48 x 48	48 x 48 x 48	60 x 60 x 60	30 x 30 x 30*	—
To Oncoming Traffic (plaque)	R1-2aP	2B.18	24 x 18	24 x 18	36 x 30	48 x 36	24 x 18	—
To Traffic in Circle (plaque)	R1-2bP	2B.18	24 x 15	24 x 15	—	—	24 x 15	36 x 24
To All Lanes (plaque)	R1-2cP	2B.18	24 x 15	24 x 15	—	—	24 x 15	36 x 24
All Way (plaque)	R1-3P	2B.04	18 x 6	18 x 6	—	—	—	30 x 12
Yield Here to Pedestrians	R1-5	2B.19	—	36 x 36	—	—	—	36 x 36
Stop Here for Pedestrians	R1-5b	2B.19	—	36 x 36	—	—	—	36 x 36
Yield Here to (Stop Here for) Trail Crossing	R1-5d,5e	2B.19	—	36 x 42	—	—	—	—
In-Street Pedestrian Crossing - Yield (Stop)	R1-6,6a	2B.20	12 x 36	12 x 36	—	—	—	—
In-Street Trail Crossing - Yield (Stop)	R1-6d,6e	2B.20	12 x 36	12 x 36	—	—	—	—
Overhead Pedestrian Crossing - Yield (Stop)	R1-9,9a	2B.20	90 x 24	90 x 24	—	—	—	—
Overhead Trail Crossing	R1-9d,9e	2B.20	72 x 24	72 x 24	—	—	—	—
Except Right Turn (plaque)	R1-10P	2B.04	24 x 18	24 x 18	—	—	—	—
Speed Limit	R2-1	2B.21	24 x 30	30 x 36	36 x 48	48 x 60	18 x 24	30 x 36
Truck Speed Limit (plaque)	R2-2P	2B.22	24 x 24	24 x 24	36 x 36	48 x 48	—	36 x 36
Bus Speed Limit (plaque)	R2-2aP	2B.22	24 x 24	24 x 24	36 x 36	48 x 48	—	36 x 36
Truck-Bus Speed Limit (plaque)	R2-2bP	2B.22	24 x 30	24 x 30	36 x 42	48 x 54	—	36 x 42
Vehicles Over X Tons Speed Limit (plaque)	R2-2cP	2B.22	24 x 30	24 x 30	36 x 42	48 x 54	—	36 x 42
Night Speed Limit (plaque)	R2-3P	2B.23	24 x 24	24 x 24	36 x 36	48 x 48	—	36 x 36
Minimum Speed Limit (plaque)	R2-4P	2B.24	24 x 24	24 x 24	36 x 36	48 x 48	—	36 x 36
Combined Maximum and Minimum Speed Limits	R2-4a	2B.24	24 x 48	24 x 48	36 x 72	48 x 96	—	36 x 72
Unless Otherwise Posted (plaque)	R2-5P	2B.21	24 x 18	24 x 18	36 x 24	36 x 24	—	36 x 24
Citywide (plaque)	R2-5aP	2B.21	24 x 6	24 x 6	—	—	—	30 x 9
Neighborhood (plaque)	R2-5bP	2B.21	24 x 6	24 x 6	—	—	—	30 x 9
Residential (plaque)	R2-5cP	2B.21	24 x 6	24 x 6	—	—	—	30 x 9
Fines Higher (plaque)	R2-6P	2B.25	24 x 18	24 x 18	36 x 24	48 x 36	—	36 x 24
Fines Double (plaque)	R2-6aP	2B.25	24 x 18	24 x 18	36 x 24	48 x 36	—	36 x 24
\$XX Fine (plaque)	R2-6bP	2B.25	24 x 18	24 x 18	36 x 24	48 x 36	—	36 x 24
Begin Higher Fines Zone	R2-10	2B.25	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
End Higher Fines Zone	R2-11	2B.25	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
End Variable Speed Limit	R2-13	2B.21	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
End Truck Speed Limit	R2-14	2B.21	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
Movement Prohibition	R3-1,2,3, 4,18,27	2B.26	24 x 24	36 x 36	36 x 36	—	—	48 x 48
Movement Prohibition - Trucks	R3-1b	2B.26	24 x 36	24 x 36	36 x 54	36 x 54	—	—
Movement Prohibition - Trucks Buses	R3-1c	2B.26	24 x 42	24 x 42	36 x 60	36 x 60	—	—
Movement Prohibition - Trucks Over X Tons	R3-1d	2B.26	24 x 48	24 x 48	36 x 66	36 x 66	—	—
Movement Prohibition - Except Buses	R3-1e	2B.26	24 x 36	24 x 36	36 x 54	36 x 54	—	—
Movement Prohibition - Except Buses Taxis	R3-1f	2B.26	24 x 42	24 x 42	36 x 66	36 x 66	—	—
Movement Prohibition - Time and Day	R3-1g	2B.26	24 x 36	24 x 36	36 x 54	36 x 54	—	—



Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 2 of 6)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Movement Prohibition - Multiple Times and Day	R3-1h	2B.26	24 x 42	24 x 42	36 x 66	36 x 66	—	—
Mandatory Movement Lane Control	R3-5,5a	2B.28	30 x 36	30 x 36	—	—	—	—
Left Lane (plaque)	R3-5bP	2B.28	30 x 12	30 x 12	—	—	—	—
HOV 2+ (plaque)	R3-5cP	2B.28	24 x 12	24 x 12	—	—	—	—
Taxi Lane (plaque)	R3-5dP	2B.28	30 x 12	30 x 12	—	—	—	—
Right Lane (plaque)	R3-5fP	2B.28	30 x 12	30 x 12	—	—	—	—
Bus Lane (plaque)	R3-5gP	2B.28	30 x 12	30 x 12	—	—	—	—
Optional Movement Lane Control Thru and Turn	R3-6	2B.29	30 x 36	30 x 36	—	—	—	—
Optional Movement U and Left Turn	R3-6a	2B.29	30 x 36	30 x 36	—	—	—	—
Optional Movement Left Turns	R3-6b	2B.29	30 x 36	30 x 36	—	—	—	—
Right (Left) Lane Must Turn Right (Left)	R3-7	2B.28	30 x 30	36 x 36	48 x 48	—	—	48 x 48
Except Buses (plaque)	R3-7aP	2B.28	24 x 12	24 x 12	—	—	—	—
Except Bicycles (plaque)	R3-7bP	2B.28	24 x 12	24 x 12	—	—	—	—
Advance Intersection Lane Control	R3-8,8a,8b, 8xa,8xb,8xc	2B.30	Varies x 30	Varies x 30	—	—	—	Varies x 36
Two-Way Left Turn Only (overhead)	R3-9a	2B.32	30 x 36	30 x 36	—	—	—	—
Two-Way Left Turn Only (post-mounted)	R3-9b	2B.32	24 x 36	24 x 36	—	—	—	36 x 48
Begin (plaque)	R3-9cP	2B.33	24 x 12	24 x 12	—	—	—	36 x 18
End (plaque)	R3-9dP	2B.33	24 x 12	24 x 12	—	—	—	36 x 18
Reversible Lane Control (overhead)	R3-9e	2B.34	108 x 48	108 x 48	—	—	—	—
Reversible Lane Control (post-mounted)	R3-9f	2B.34	30 x 42	36 x 54	—	—	—	—
Advance Reversible Lane Control Transition	R3-9g,9h	2B.34	108 x 36	108 x 36	—	—	—	—
End Reverse Lane	R3-9i	2B.34	108 x 48	108 x 48	—	—	—	—
Lane For Left Turn Only	R3-19	2B.28	30 x 24	30 x 24	—	—	—	—
Lane for U Turn Only	R3-19a	2B.28	30 x 24	30 x 24	—	—	—	—
Lane For U and Left Turns Only	R3-19b	2B.28	30 x 30	30 x 30	—	—	—	—
Begin Right (Left) Turn Lane	R3-20	2B.28	24 x 36	24 x 36	—	—	—	—
All Turns (U-Turn) from Right Lane	R3-23,23a	2B.35	60 x 36	60 x 36	—	—	—	—
All Turns (U-Turn) Directional	R3-24,24b, 25,25b,26a	2B.35	72 x 18	72 x 18	—	—	—	—
U-Turns and Left Turns Directional	R3-24a, 25a,26	2B.35	60 x 24	60 x 24	—	—	—	—
Right (Left) Lane Must Exit	R3-33	2B.31	—	—	78 x 36	78 x 36	—	—
Right (Left) Lane Must Exit	R3-33a	2B.31	—	—	42 x 60	42 x 60	—	—
Do Not Pass	R4-1	2B.36	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
Pass With Care	R4-2	2B.37	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
Slower Traffic Keep Right	R4-3	2B.38	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
Trucks Use Right Lane	R4-5	2B.38	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
Keep Right	R4-7,7a,7b	2B.39	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
Narrow Keep Right	R4-7c	2B.39	18 x 30	18 x 30	—	—	—	—
Keep Left	R4-8,8a,8b	2B.39	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
Narrow Keep Left	R4-8c	2B.39	18 x 30	18 x 30	—	—	—	—
Stay in Lane	R4-9	2B.40	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
Runaway Vehicles Only	R4-10	2B.41	48 x 48	48 x 48	—	—	—	—



Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 3 of 6)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Slow Vehicles with XX or More Following Vehicles Must Use Turn-Out	R4-12	2B.42	42 x 24	42 x 24	—	—	—	72 x 42
Slow Vehicles Must Use Turn-Out Ahead	R4-13	2B.42	42 x 24	42 x 24	—	—	—	—
Slow Vehicles Must Turn Out	R4-14	2B.42	30 x 42	30 x 42	—	—	—	—
Keep Right Except to Pass	R4-16	2B.38	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
Do Not Drive on Shoulder	R4-17	2B.43	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
Do Not Pass on Shoulder	R4-18	2B.43	24 x 30	24 x 30	36 x 48	48 x 60	18 x 24	36 x 48
All Traffic	R4-20	2B.44	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
Right (Left) Turn Only	R4-21	2B.44	24 x 30	24 x 30	—	—	—	—
Do Not Enter	R5-1	2B.46	30 x 30	36 x 36	36 x 36	48 x 48	—	36 x 36
Wrong Way	R5-1a	2B.47	36 x 24	42 x 30	36 x 24	42 x 30	30 x 18	42 x 30
No Trucks	R5-2	2B.45	24 x 24	24 x 24	30 x 30	36 x 36	—	36 x 36
Except Local Deliveries (plaque)	R5-2aP	2B.45	24 x 12	24 x 12	30 x 15	36 x 18	—	36 x 18
No Thru Trucks	R5-2b	2B.45	24 x 30	24 x 30	30 x 36	36 x 48	—	36 x 48
No Motor Vehicles	R5-3	2B.45	24 x 24	24 x 24	—	—	24 x 24	—
No Commercial Vehicles	R5-4	2B.45	24 x 30	24 x 30	36 x 48	36 x 48	—	—
No Vehicles with Lugs	R5-5	2B.45	24 x 30	24 x 30	36 x 48	48 x 60	—	—
No Bicycles	R5-6	2B.45	24 x 24	24 x 24	30 x 30	36 x 36	24 x 24*	48 x 48
No Non-Motorized Traffic	R5-7	2B.45	30 x 24	30 x 24	42 x 24	48 x 30	—	42 x 24
No Motor-Driven Cycles	R5-8	2B.45	30 x 24	30 x 24	42 x 24	48 x 30	—	42 x 24
No Pedestrians, Bicycles, Motor-Driven Cycles	R5-10	2B.45	30 x 36	30 x 36	—	—	—	—
No Pedestrians, Bicycles, Motor-Driven Cycles On Freeway	R5-10a	2B.45	30 x 36	30 x 36	—	—	—	—
No Pedestrians or Bicycles	R5-10b	2B.45	30 x 18	30 x 18	—	—	—	—
No Pedestrians	R5-10c	2B.45	24 x 12	24 x 12	—	—	—	—
Authorized Vehicles Only	R5-11	2B.45	30 x 24	30 x 24	—	—	—	—
No Thru Traffic	R5-12	2B.45	24 x 30	24 x 30	—	—	—	30 x 36
One Way	R6-1	2B.49	36 x 12	48 x 18	48 x 18	48 x 18	—	72 x 24
One Way	R6-2	2B.49	24 x 30	30 x 36	36 x 48	48 x 60	18 x 24	36 x 48
Divided Highway Crossing	R6-3,3a	2B.50	30 x 24	30 x 24	36 x 30	—	—	36 x 30
Roundabout Circulation (plaque)	R6-5P	2B.51	30 x 30	30 x 30	—	—	—	—
Begin One Way	R6-6	2B.49	24 x 30	30 x 36	—	—	—	—
End One Way	R6-7	2B.49	24 x 30	30 x 36	—	—	—	—
Parking Restrictions	R7-1,2,2a,3, 4,4a, 5,6,8,10, 107,108	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
Van Accessible (plaque)	R7-8aP	2B.52, 2B.53	12 x 6	12 x 6	—	—	—	—
Parking Fee Station, Multispace Meter	R7-20	2B.52, 2B.53	24 x 18	24 x 18	—	—	—	—
Metered Parking	R7-21	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
Mobile Parking Payment (plaque)	R7-21aP	2B.52, 2B.53	12 x 6	12 x 6	—	—	—	—
Metered Parking	R7-22	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
No Parking Bus Stop	R7-107a	2B.52, 2B.53	12 x 24	12 x 24	—	—	—	—
No Parking Bus Stop (with transit pictograph)	R7-107b	2B.52, 2B.53	12 x 30	12 x 30	—	—	—	—



Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 4 of 6)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
No Parking Except Electric Vehicles	R7-111	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
No Parking Except Electric Vehicles (part-time)	R7-111a	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
Electric Vehicle Parking (time limit)	R7-112	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
Electric Vehicle Parking (time limit part-time)	R7-112a	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
Electric Vehicle Parking (time limit part-time)	R7-112b	2B.52, 2B.53	12 x 21	12 x 21	—	—	—	—
No Parking Except While Charging	R7-113	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
Vehicle Must Be Plugged In (plaque)	R7-113aP	2B.52, 2B.53	12 x 6	12 x 6	—	—	—	—
Vacate Stall When Charging Completed (plaque)	R7-113bP	2B.52, 2B.53	12 x 6	12 x 6	—	—	—	—
Vehicle Charging Only (time limit)	R7-114	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
Vehicle Charging Only (time limit, part-time)	R7-114a	2B.52, 2B.53	12 x 18	12 x 18	—	—	—	—
Vehicle Charging Only (time limit part-time)	R7-114b	2B.52, 2B.53	12 x 21	12 x 21	—	—	—	—
No Parking/Restricted Parking (combined sign)	R7-200	2B.52, 2B.53	24 x 18	24 x 18	—	—	—	—
No Parking/Restricted Parking (combined sign)	R7-200a	2B.52, 2B.53	12 x 36	12 x 36	—	—	—	—
Tow Away Zone (plaque)	R7-201P, 201aP	2B.52, 2B.53	12 x 6	12 x 6	—	—	—	—
This Side of Sign (plaque)	R7-202P	2B.52, 2B.53	12 x 6	12 x 6	—	—	—	—
Snow Emergency Route	R7-203	2B.52, 2B.53	18 x 24	18 x 24	—	—	—	24 x 30
No Parking on Pavement	R8-1	2B.52, 2B.53	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
No Parking Except on Shoulder	R8-2	2B.52, 2B.53	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
No Parking (symbol)	R8-3	2B.52, 2B.53	24 x 24	30 x 30	36 x 36	48 x 48	12 x 12	36 x 36
No Parking	R8-3a	2B.52, 2B.53	24 x 30	24 x 30	36 x 36	48 x 48	18 x 24	36 x 36
On Pavement	R8-3c	2B.52, 2B.53	24 x 36	24 x 36	—	—	18 x 30	36 x 54
On Bridge	R8-3d	2B.52, 2B.53	24 x 36	24 x 36	—	—	18 x 30	36 x 54
On Tracks	R8-3e	2B.52, 2B.53	24 x 36	24 x 36	—	—	18 x 30	36 x 54
Except on Shoulder	R8-3f	2B.52, 2B.53	24 x 36	24 x 36	—	—	18 x 30	36 x 54
Emergency Parking Only	R8-4	2B.55	30 x 24	30 x 24	30 x 24	48 x 36	—	48 x 36
No Stopping on Pavement	R8-5	2B.53, 2B.54	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
No Stopping Except on Shoulder	R8-6	2B.53, 2B.54	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
Emergency Stopping Only	R8-7	2B.55	30 x 24	30 x 24	48 x 36	48 x 36	—	48 x 36
Walk on Left Facing Traffic	R9-1	2B.56	18 x 24	18 x 24	—	—	—	—
Cross Only at Crosswalks	R9-2	2B.57	12 x 18	12 x 18	—	—	—	—
No Pedestrian Crossing (symbol)	R9-3	2B.57	18 x 18	18 x 18	24 x 24	30 x 30	—	30 x 30
No Pedestrian Crossing	R9-3a	2B.57	12 x 18	12 x 18	—	—	—	—



Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 5 of 6)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Use Crosswalk (plaque)	R9-3bP	2B.57	18 x 12	18 x 12	—	—	—	—
No Hitchhiking (symbol)	R9-4	2B.56	18 x 18	18 x 18	—	—	—	24 x 24
No Hitchhiking	R9-4a	2B.56	18 x 24	18 x 24	—	—	12 x 18	—
No Skaters	R9-13	2B.45	18 x 18	18 x 18	24 x 24	30 x 30	—	30 x 30
No Equestrians	R9-14	2B.45	18 x 18	18 x 18	24 x 24	30 x 30	—	30 x 30
No Snowmobiles	R9-15	2B.45	18 x 18	18 x 18	24 x 24	30 x 30	—	30 x 30
No All-Terrian Vehicles	R9-16	2B.45	18 x 18	18 x 18	24 x 24	30 x 30	—	30 x 30
Except on Shoulder (plaque)	R9-19P	2B.45	18 x 12	18 x 12	24 x 18	30 x 24	—	30 x 24
Cross Only On Green	R10-1	2B.58	12 x 18	12 x 18	—	—	—	—
Pedestrian Signs	R10-2,3, 3b,3c,3d,4	2B.58	9 x 12	9 x 12	—	—	—	—
Pedestrian Signs	R10-3a,3e,3f, 3g,3h,3i,4a	2B.58	9 x 15	9 x 15	—	—	—	—
Left on Green Arrow Only	R10-5	2B.59	30 x 36	30 x 36	30 x 36	—	24 x 30	48 x 60
Stop Here on Red	R10-6	2B.59	24 x 36	24 x 36	—	—	—	36 x 48
Stop Here on Red	R10-6a	2B.59	24 x 30	24 x 30	—	—	—	36 x 42
Do Not Block Intersection	R10-7	2B.59	24 x 30	24 x 30	—	—	—	—
Use Lane with Green Arrow	R10-8	2B.59	30 x 36	30 x 36	36 x 42	—	—	60 x 72
Left (Right) Turn Signal	R10-10	2B.59	24 x 30	24 x 30	—	—	—	30 x 36
U-Turn Signal	R10-10a	2B.59	24 x 30	24 x 30	—	—	—	30 x 36
No Turn on Red	R10-11	2B.60	24 x 30	24 x 30	—	—	—	36 x 48
No Turn on Circular Red	R10-11a	2B.60	24 x 30	24 x 30	—	—	—	36 x 48
No Turn on Red	R10-11b	2B.60	24 x 24	24 x 24	—	—	—	36 x 36
No Turn on Red Except From Right Lane	R10-11c	2B.60	30 x 36	30 x 36	—	—	—	—
No Turn on Red From This Lane	R10-11d	2B.60	30 x 42	30 x 42	—	—	—	—
Left Turn Yield on Green	R10-12	2B.59	30 x 36	30 x 36	—	—	—	—
Left Turn Yield on Flashing Yellow Arrow	R10-12a	2B.59	30 x 36	30 x 36	—	—	—	—
Left Turn Yield to Bicycle	R10-12b	2B.59	30 x 36	30 x 36	—	—	—	—
Emergency Signal	R10-13	2B.59	36 x 24	36 x 24	—	—	—	42 x 30
Emergency Signal - Stop on Flashing Red	R10-14	2B.59	36 x 42	36 x 42	—	—	—	—
Emergency Signal - Stop on Flashing Red (overhead)	R10-14a	2B.59	60 x 24	60 x 24	—	—	—	—
Stop Here on Flashing Red	R10-14b	2B.59	24 x 36	24 x 36	—	—	—	36 x 48
Turning Vehicles Yield to Pedestrians	R10-15	2B.59	30 x 30	30 x 30	—	—	—	—
Turning Vehicles Stop for Pedestrians	R10-15a	2B.59	30 x 30	30 x 30	—	—	—	—
U-Turn Yield to Right Turn	R10-16	2B.59	30 x 36	30 x 36	—	—	—	—
Right on Red Arrow After Stop	R10-17a	2B.60	30 x 36	30 x 36	—	—	—	36 x 48
Traffic Laws Photo Enforced	R10-18	2B.69	36 x 24	36 x 24	48 x 30	54 x 36	—	54 x 36
Traffic Signal Photo Enforced	R10-18a	2B.69	30 x 42	30 x 42	30 x 42	—	—	36 x 54
Photo Enforced (symbol plaque)	R10-19P	2B.69	24 x 12	24 x 12	36 x 18	48 x 24	—	48 x 24
Photo Enforced (plaque)	R10-19aP	2B.69	24 x 18	24 x 18	36 x 24	48 x 36	—	48 x 36
MON-FRI (and times) (3 lines) (plaque)	R10-20aP	2B.60	24 x 24	24 x 24	—	—	—	—
SUNDAY (and times) (2 lines) (plaque)	R10-20aP	2B.60	24 x 18	24 x 18	—	—	—	—
Crosswalk - Stop on Red	R10-23	2B.59	24 x 30	24 x 30	—	—	—	—



Table 2B-1. Regulatory Sign and Plaque Sizes (Sheet 6 of 6)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Stop on Red - Yield on Flashing Red After Stop	R10-23a	2B.59	24 x 30	24 x 30	—	—	—	—
Push Button For Warning Lights - Wait for Gap in Traffic	R10-25	2B.58	9 x 12	9 x 12	—	—	—	—
Left Turn Yield on Flashing Red Arrow After Stop	R10-27	2B.59	30 x 36	30 x 36	—	—	—	—
XX Vehicles per Green	R10-28	2B.61	24 x 30	24 x 30	—	—	—	—
XX Vehicles per Green Each Lane	R10-29	2B.61	36 x 24	36 x 24	—	—	—	—
Right Turn on Red Must Yield to U-Turn	R10-30	2B.60	30 x 36	30 x 36	—	—	—	—
At Signal (plaque)	R10-31P	2B.59	24 x 9	24 x 9	—	—	—	—
Push Button for 2 Seconds for Extra Crossing Time	R10-32P	2B.58	9 x 12	9 x 12	—	—	—	—
Keep Off Median	R11-1	2B.62	24 x 30	24 x 30	—	—	—	—
Road Closed	R11-2,2a, 2b,2c	2B.63	48 x 30	48 x 30	—	—	—	—
Road Closed - Local Traffic Only	R11-3,3a, 3b,4	2B.63	60 x 30	60 x 30	—	—	—	—
Weight Limit	R12-1, 2	2B.64	24 x 30	24 x 30	36 x 48	—	—	36 x 48
Weight Limit - Axle, Gross	R12-4	2B.64	36 x 24	36 x 24	—	—	—	—
Weight Limit	R12-5	2B.64	24 x 36	24 x 36	36 x 48	48 x 60	—	—
Weight Limit - Specialized Hauling Vehicles	R12-6	2B.64	30 x 42	36 x 48	36 x 48	48 x 60	—	48 x 60
Weight Limit - Emergency Vehicles	R12-7	2B.64	30 x 36	30 x 36	48 x 60	48 x 60	—	48 x 60
Weight Limit - Emergency Vehicles (plaque)	R12-7aP	2B.64	30 x 30	30 x 30	48 x 48	48 x 48	—	48 x 48
Weigh Station	R13-1	2B.65	72 x 54	72 x 54	96 x 72	132 x 90	—	—
Truck Route	R14-1	2B.66	24 x 18	24 x 18	—	—	—	—
Hazardous Material	R14-2,3	2B.67	24 x 24	24 x 24	30 x 30	36 x 36	—	42 x 42
National Network	R14-4,5	2B.68	30 x 30	30 x 30	36 x 36	36 x 36	—	42 x 42
Move Over or Reduce Speed	R16-3	2B.71	—	60 x 48	84 x 60	102 x 72	—	84 x 60
Minor Crashes Move Vehicles from Travel Lanes	R16-4	2B.70	—	60 x 42	84 x 54	96 x 60	—	84 x 54
Lights On When Using Wipers or Raining	R16-5,6	2B.73	24 x 30	24 x 30	36 x 48	48 x 60	—	36 x 48
Turn On Headlights Next XX Miles	R16-7	2B.73	60 x 18	60 x 18	96 x 30	132 x 36	—	96 x 30
Turn On, Check Headlights	R16-8,9	2B.73	42 x 18	42 x 18	60 x 30	78 x 36	—	60 x 30
Begin, End Daytime Headlight Section	R16-10,11	2B.73	60 x 18	60 x 18	96 x 30	120 x 36	—	96 x 30
No Hand-Held Phone Use By Driver	R16-15	2B.72	—	—	72 x 48	72 x 48	—	—
No Hand-Held Phone Use By Driver	R16-15a	2B.72	30 x 42	30 x 42	—	—	—	—

* See Table 9A-1 for minimum size required for signs on bicycle facilities

Notes: 1. Larger signs may be used when appropriate

2. Dimensions in inches are shown as width x height



Section 2B.04 STOP Sign (R1-1) and ALL-WAY Plaque (R1-3P)

Standard:

- 01 When it is determined that a full stop is always required on an approach to an intersection, a STOP (R1-1) sign (see Figure 2B-1) shall be used.
- 02 Secondary legends shall not be used on STOP sign faces.
- 03 The STOP sign shall not be displayed using a changeable message sign.
- 04 At intersections where all approaches are controlled by STOP signs (see Section 2B.12), an ALL-WAY (R1-3P) supplemental plaque (see Figure 2B-1) shall be mounted below each STOP sign. The ALL-WAY plaque shall have a white legend and border on a red background.
- 05 Supplemental plaques with legends such as 2-WAY, 3-WAY, 4-WAY, or other numbers of ways shall not be used with STOP signs.

Support:

- 06 The use of the CROSS TRAFFIC DOES NOT STOP (W4-4P series) and other plaques with variations of this legend is described in Section 2C.66.

Guidance:

- 07 The TRAFFIC FROM LEFT (RIGHT) DOES NOT STOP (W4-4aP) plaque or ONCOMING TRAFFIC DOES NOT STOP (W4-4bP) plaque should be used at intersections where STOP signs control all but one approach to the intersection, unless the only non-stopped approach is from a one-way street.

Option:

- 08 The EXCEPT RIGHT TURN (R1-10P) plaque (see Figure 2B-1) may be mounted below the STOP sign if an engineering study determines that a special combination of geometry and traffic volumes is present that makes it possible for right-turning traffic on the approach to be allowed to enter the intersection without stopping.

Support:

- 09 The design and application of Stop Beacons are described in Section 4S.05.

Section 2B.05 YIELD Sign (R1-2)


Support:

- 01 The YIELD sign requires road users to yield the right-of-way to other traffic on certain approaches to an intersection or on a two way approach to a one way section of roadway, such as a narrow bridge or underpass. Vehicles controlled by a YIELD sign need to slow down to a speed that is reasonable for the existing conditions or stop when necessary to avoid interfering with conflicting traffic.

Standard:

- 02 The YIELD (R1-2) sign (see Figure 2B-1) shall not be displayed using a changeable message sign.

Figure 2B-1. STOP and YIELD Signs and Plaques

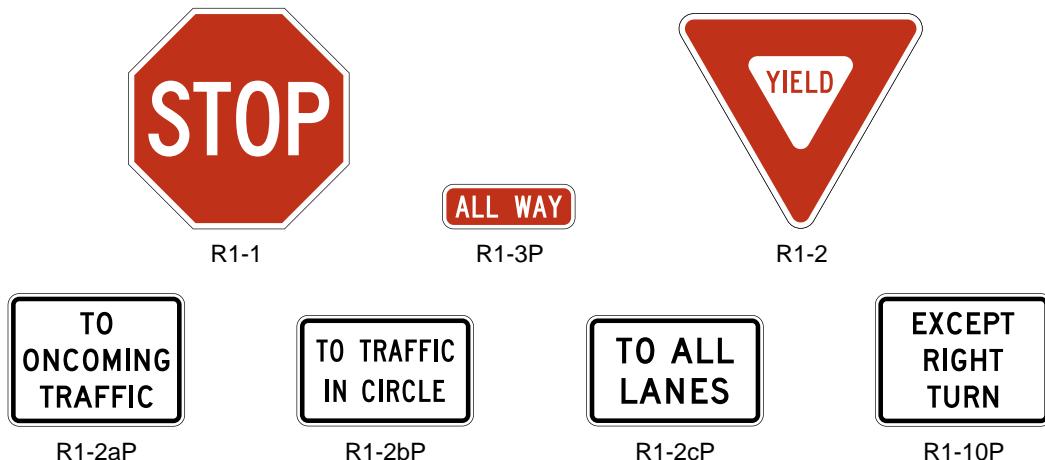

NDOT Sign Sizes

Regulatory

Type	Code	W	H	Type	Code	W	H
RNV	1 - 1	30	x 36	RNV	6 - 2	96	x 48
RNV	1 - 2	30	x 36	RNV	6 - 2	132	x 66
RNV	1 - 3	30	x 36	RNV	6 - 3	42	x 30
RNV	2 - 1	36	x 30	RNV	6 - 3	54	x 36
RNV	2 - 2	36	x 30	RNV	6 - 4	48	x 30
RNV	2 - 3	36	x 30	RNV	6 - 4	54	x 36
RNV	2 - 4	36	x 30	RNV	7 - 1	72	x 48
RNV	2 - 5	36	x 30	RNV	7 - 2	72	x 54
RNV	2 - 6	36	x 30	RNV	7 - 3	84	x 72
RNV	2 - 7	36	x 30	RNV	7 - 4	60	x 48
RNV	2 - 8	36	x 30	RNV	8 - 1	108	x 36
RNV	2 - 9	36	x 30	RNV	8 - 2	108	x 36
RNV	2 - 10	36	x 30	RNV	8 - 3	108	x 36
RNV	2 - 11	36	x 30	RNV	8 - 4	66	x 36
RNV	2 - 12	36	x 30	RNV	9 - 1	96	x 54
RNV	2 - 13	42	x 30	RNV	9 - 1	126	x 72
RNV	2 - 14	42	x 30	RNV	9 - 1	216	x 108
RNV	3 - 1	54	x 30	RNV	9 - 2	42	x 30
RNV	3 - 2	54	x 30	RNV	9 - 3	54	x 30
RNV	3 - 3	54	x 30	RNV	9 - 4	42	x 36
RNV	3 - 4	54	x 30	RNV	10 - 1	V	x 24
RNV	3 - 5	54	x 30	RNV	11 - 1	102	x 48
RNV	3 - 6	54	x 30	RNV	11 - 1	138	x 66
RNV	3 - 7	54	x 30	RNV	11 - 1	210	x 96
RNV	3 - 8	54	x 30	RNV	12 - 1	114	x 42
RNV	3 - 9	54	x 30	RNV	12 - 1	150	x 48
RNV	3 - 10	54	x 30	RNV	13 - 1	144	x 78
RNV	3 - 11	54	x 30	RNV	14 - 1	V	x 24
RNV	3 - 12	54	x 30	RNV	15 - 1	84	x 48
RNV	3 - 13	54	x 30	RNV	16 - 1	36	x 42
RNV	3 - 14	54	x 30	RNV	16 - 1	48	x 54
RNV	3 - 15	54	x 30	RNV	17 - 1	24	x 18
RNV	3 - 16	54	x 30	RNV	18 - 1	30	x 18
RNV	3 - 17	54	x 30	RNV	18 - 1	42	x 24
RNV	3 - 18	54	x 30	RNV	19 - 1	54	x 36
RNV	3 - 19	54	x 30	RNV	20 - 1	48	x 36
RNV	3 - 20	54	x 30	RNV	20 - 1	72	x 48
RNV	3 - 21	54	x 30	RNV	21 - 1	42	x 36
RNV	3 - 22	54	x 30	RNV	22 - 1	78	x 42
RNV	3 - 23	54	x 30	RNV	22 - 1	138	x 54
RNV	3 - 24	54	x 30	RNV	23 - 1	24	x 30
RNV	4 - 1	66	x 54	RNV	24 - 1	30	x 36
RNV	4 - 2	84	x 54	RNV	25 - 1	12	x 18
RNV	5 - 1	60	x 42	RNV	26 - 1	12	x 18
RNV	6 - 1	54	x 48	RNV	27 - 1	24	x 36
RNV	6 - 1	72	x 66	RNV	27 - 2	42	x 36



NDOT Sign Sizes

Regulatory

Type	Code	W	H
RNV	28 - 1	96	x 66
RNV	29 - 1	60	x 24
RNV	30 - 1	60	x 36
RNV	30 - 2	42	x 36
RNV	31 - 1	60	x 18
RNV	31 - 1	120	x 36
RNV	31 - 2	48	x 36
RNV	31 - 3	48	x 36
RNV	31 - 4	30	x 30



2C - Warning



Chapter 2C
Warning

Page 1 of 5

	*	W1-1L		W1-2aL 45		W1-6		W1-10dRL
	*	W1-1R		W1-2aL 50		W1-7		W1-10dRR
	*	W1-1aL 10		W1-2aL 55		W1-8		W1-10eL
	*	W1-1aL 15		W1-2aL 60		W1-10LL		W1-10eR
	*	W1-1aL 20		W1-2aR 35		W1-10LR		W1-11L
		W1-1aL 25		W1-2aR 40		W1-10RL		W1-11R
	*	W1-1aL 30		W1-2aR 45		W1-10RR		W1-13L
	*	W1-1aR 10		W1-2aR 50		W1-10aL		W1-13R
	*	W1-1aR 15		W1-2aR 55		W1-10aR		W1-15L
	*	W1-1aR 20		W1-2aR 60		W1-10bL		W1-15R
	*	W1-1aR 25		*		W1-10bR		W13-1P 10
	*	W1-1aR 30		*		W1-10cL		W13-1P 15
		W1-2L		W1-4L		W1-10cR		W13-1P 20
		W1-2R		W1-4R		W1-10dLL		W13-1P 25
		W1-2aL 35		W1-5L		W1-10dLR		W13-1P 30
		W1-2aL 40		W1-5R				W13-1P 35
								W13-1P 40
								W13-1P 45

* Advisory Speed of
30 MPH or less





Chapter 2C
Warning

Page 2 of 5

	W13-1P 50		W13-6 25		W13-7 60		W12-2a (XY)
	W13-1P 55		W13-6 30		W7-1		W14-1
	W13-1P 60		W13-6 35		W7-1a (G)		W14-1aL
	W13-2 25		W13-6 40		W7-1a (G %)		W14-1aR
	W13-2 30		W13-6 45		W7-2P		W14-2
	W13-2 35		W13-6 50		W7-2bP		W14-2aL
	W13-2 40		W13-6 55		W7-3P (G)		W14-2aR
	W13-2 45		W13-6 60		W7-3aP (X)		W19-1
	W13-2 50		W13-7 25		W7-3bP (G)(X)		W19-2
	W13-2 55		W13-7 30		W7-4		W19-3
	W13-2 60		W13-7 35		W7-4b		W19-3a
	W13-3 25		W13-7 40		W7-4c		W19-3b
	W13-3 30		W13-7 45		W7-6		W19-4
	W13-3 35		W13-7 50		W5-1		W19-5
	W13-3 40		W13-7 55		W5-2		W3-1
	W13-3 45		W13-7 60		W5-3		W3-2
	W13-3 50		W13-7 65		W6-1		W3-3
	W13-3 55		W13-7 70		W6-2		W3-4
	W13-3 60				W12-1		W3-4a
					W12-2 (XY)		W3-7
							W3-8

Page 2C-2

	W8-1		W8-17L		W3-5 40		W4-6R
	W8-2		W8-18		W3-5 45		W4-7L
	W8-2a		W8-19		W3-5 50		W4-7R
	W8-3		W8-21		W3-5 55		W6-3
	W8-4		W8-22		W3-5 60		W9-1L
	W8-5P		W8-23		W3-5 65		W9-1R
	W8-5aP		W8-97		W4-1L		W9-2L
	W8-5bP		W8-25		W4-1R		W9-2R
	W8-5cP				W4-2L		W9-7
	W8-7		W8-98P		W4-2R		W9-99L
	W8-8		W23-2		W4-3L		W9-99R
	W8-9		W23-2a		W4-3R		W14-3
	W8-14		W23-98		W4-5L		W1-7
	W8-15		W23-99		W4-5R		W2-1
	W8-15aP		W3-5 25		W4-5P		W2-2
	W8-16		W3-5 30		W4-6L		W2-3L
	W8-17R		W3-5 35				


	W2-3R		W11-8L		W11-19		W16-15P
	W2-4		W11-8R		W11-22		W20-3 Y
	W2-5		W11-10		W15-1		W20-3 Y 5
	W2-6		W11-11		W16-1		W8-27
	W16-17P		W11-12P		W16-1P		
	W16-12P		W11-14		W16-2P (XXX)		
	W2-7L		W11-15		W16-2aP (XXX)		
	W2-7R		W11-15P		W16-3P (X)		
	W2-8		W11-15a		W16-3aP (X)		
	W2-97		W11-2L		W16-4P (XXX)		
	W4-4P		W11-2R		W16-5P		
	W4-4aP						
	W4-4bP				W16-6pL		
	W4-4cP		W11-3		W16-6pR		
	W8-6		W11-4		W16-7PL		
	W11-1		W11-7		W16-7PL YG		
	W11-5		W11-9		W16-7PR		
	W11-5a		W11-18		W16-7PR YG		
					W16-8P		
					W16-8aP		
					W16-9P		
					W16-9P YG		
					W16-13P		

Chapter 2C
Warning

Page 5 of 5




K-71 YY




OM1-1




OM1-2




OM1-3



OM2-1V



OM2-2V



OM2-1H



OM2-2H




OM3-L




OM3-C




OM3-R



OM4-1



OM4-2



OM4-3



Page 2C-5

2025/09/18

NDOT - Warning

Page 1 of 1



WNV2-1



WNV4-1



WNV9-1



WNV10-1



WNV11-1



WNV12-1



WNV15-1



WNV15-8



WNV18-1



WNV19-2L



WNV19-2R



Page 2C-6

Chapter 2C Warning

Page 104

2009 Edition

Table 2C-1. Categories of Warning Signs and Plaques

Category	Group	Section	Signs or Plaques	Sign Designations
Roadway Related	Changes in Horizontal Alignment	2C.07	Turn, Curve, Reverse Turn, Reverse Curve, Winding Road, Hairpin Curve, 270-Degree Curve	W1-1,2,3,4,5,11,15
		2C.08	Advisory Speed	W13-1P
		2C.09	Chevron Alignment	W1-8
		2C.10	Combination Horizontal Alignment/Advisory Speed	W1-1a,2a
		2C.11	Combination Horizontal Alignment/Intersection	W1-10,10a,10b,10c,10d
		2C.12	Large Arrow (one direction)	W1-6
		2C.13	Truck Rollover	W1-13
		2C.14	Advisory Exit or Ramp Speed	W13-2,3
	Vertical Alignment	2C.15	Combination Horizontal Alignment/Advisory Exit or Ramp Speed	W13-6,7
		2C.16	Hill	W7-1,1a,2P,2bP,3P,3aP,3bP
		2C.17	Truck Escape Ramp	W7-4,4b,4c,4dP,4eP,4fP
		2C.18	Hill Blocks View	W7-6
	Cross Section	2C.19	Road Narrows	W5-1
		2C.20,21	Narrow Bridge, One Lane Bridge	W5-2,3
		2C.22,23,25	Divided Highway, Divided Highway Ends, Double Arrow	W6-1,2; W12-1
		2C.24	Freeway or Expressway Ends, All Traffic Must Exit	W19-1,2,3,4,5
		2C.26	Dead End, No Outlet	W14-1,1a,2,2a
		2C.27	Low Clearance	W12-2,2a
	Roadway Surface Condition	2C.28,29	Bump, Dip, Speed Hump	W8-1,2; W17-1
		2C.30	Pavement Ends	W8-3
		2C.31	Shoulder, Uneven Lanes	W8-4,9,11,17,17P,23,25
		2C.32	Slippery When Wet, Loose Gravel, Rough Road, Bridge Ices Before Road, Fallen Rocks	W8-5,7,8,13,14
		2C.33	Grooved Pavement, Metal Bridge Deck	W8-15,15P,16
		2C.34	No Center Line	W8-12
	Weather	2C.35	Road May Flood, Flood Gauge, Gusty Winds Area, Fog Area	W8-18,19,21,22
Traffic Related	Advance Traffic Control	2C.36-39	Stop Ahead, Yield Ahead, Signal Ahead, Be Prepared To Stop, Speed Reduction, Drawbridge Ahead, Ramp Meter Ahead	W3-1,2,3,4,5,5a,6,7,8
	Traffic Flow	2C.40-45	Merge, No Merge Area, Lane Ends, Added Lane, Two-Way Traffic, Right Lane Exit Only Ahead, No Passing Zone	W4-1,2,3,5,5P,6; W6-3; W9-1,2,7; W14-3
	Intersections	2C.46	Cross Road, Side Road, T, Y, Circular Intersection, Side Roads	W2-1,2,3,4,5,6,7,8; W16-12P,17P
		2C.47	Large Arrow (two directions)	W1-7
		2C.48	Oncoming Extended Green	W25-1,2
	Vehicular Traffic	2C.49	Truck Crossing, Truck (symbol), Emergency Vehicle, Tractor, Bicycle, Golf Cart, Horse-Drawn Vehicle, Trail Crossing	W8-6; W11-1,5,5a,8,10,11,12P,14,15,15P,15a; W16-13P
	Non-Vehicular	2C.50,51	Pedestrian, Deer, Cattle, Snowmobile, Equestrian, Wheelchair, Large Animals, Playground	W11-2,3,4,6,7,9,16,17,18,19,20,21,22; W15-1; W16-13P
	New	2C.52	New Traffic Pattern Ahead	W23-2
Other Supplemental Plaques	Location	2C.53	Downward Diagonal Arrow, Ahead	W16-7P,9P
	HOV	2C.53	High-Occupancy Vehicle	W16-11P
	Distance	2C.55	XX Feet, XX Miles, Next XX Feet, Next XX Miles	W7-3aP; W16-2P,2aP,3P,3aP,4P
	Arrow	2C.56	Advance Arrow, Directional Arrow	W16-5P,6P
	Street Name Plaque	2C.58	Advance Street Name	W16-8P,8aP
	Intersection	2C.59	Cross Traffic Does Not Stop	W4-4P,4aP,4bP
	Share The Road	2C.60	Share The Road	W16-1P
	Photo Enforced	2C.61	Photo Enforced	W16-10P,10aP
	New	2C.62	New	W16-15P



Table 2C-2. Warning Sign and Plaque Sizes (Sheet 1 of 3)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Horizontal Alignment	W1-1,2,3,4,5	2C.07	30 x 30*	36 x 36	36 x 36	36 x 36	—	48 x 48
Combination Horizontal Alignment/Advisory Speed	W1-1a,2a	2C.10	36 x 36	36 x 36	48 x 48	48 x 48	—	48 x 48
One-Direction Large Arrow	W1-6	2C.12	48 x 24	48 x 24	60 x 30	60 x 30	—	60 x 30
Two-Direction Large Arrow	W1-7	2C.47	48 x 24	48 x 24	—	—	—	60 x 30
Chevron Alignment	W1-8	2C.09	18 x 24	18 x 24	30 x 36	36 x 48	—	24 x 30
Combination Horizontal Alignment/Intersection	W1-10,10a, 10b,10c,10d, 10e	2C.11	36 x 36	36 x 36	36 x 36	48 x 48	—	—
Hairpin Curve	W1-11	2C.07	30 x 30	30 x 30	36 x 36	48 x 48	—	48 x 48
Truck Rollover	W1-13	2C.13	36 x 36	36 x 36	36 x 36	48 x 48	—	36 x 36
270-degree Loop	W1-15	2C.07	30 x 30	30 x 30	36 x 36	48 x 48	—	48 x 48
Intersection Warning	W2-1, 2,3,4,5,6,7,8	2C.46	30 x 30	30 x 30	36 x 36	—	24 x 24	48 x 48
Advanced Traffic Control	W3-1,2,3	2C.36	30 x 30	30 x 30	48 x 48	48 x 48	30 x 30	—
Be Prepared to Stop	W3-4	2C.36	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30	—
Reduced Speed Limit Ahead	W3-5	2C.38	36 x 36	36 x 36	48 x 48	48 x 48	—	—
XX MPH Speed Zone Ahead	W3-5a	2C.38	36 x 36	36 x 36	48 x 48	48 x 48	—	—
Draw Bridge	W3-6	2C.39	36 x 36	36 x 36	48 x 48	—	—	60 x 60
Ramp Meter Ahead	W3-7	2C.37	36 x 36	36 x 36	—	—	—	—
Ramp Metered When Flashing	W3-8	2C.37	36 x 36	36 x 36	—	—	—	—
Merge	W4-1	2C.40	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30*	—
Lane Ends	W4-2	2C.42	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30*	—
Added Lane	W4-3	2C.41	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30*	—
Cross Traffic Does Not Stop (plaque)	W4-4P	2C.59	24 x 12	24 x 12	36 x 18	—	—	48 x 24
Traffic From Left (Right) Does Not Stop (plaque)	W4-4aP	2C.59	24 x 12	24 x 12	36 x 18	—	—	48 x 24
Oncoming Traffic Does Not Stop (plaque)	W4-4bP	2C.59	24 x 12	24 x 12	36 x 18	—	—	48 x 24
Entering Roadway Merge	W4-5	2C.40	36 x 36	36 x 36	48 x 48	—	—	—
No Merge Area (plaque)	W4-5P	2C.10	18 x 21	18 x 21	24 x 30	—	—	—
Entering Roadway Added Lane	W4-6	2C.41	36 x 36	36 x 36	48 x 48	—	—	—
Road Narrows	W5-1	2C.19	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30*	—
Narrow Bridge	W5-2	2C.20	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30*	—
One Lane Bridge	W5-3	2C.21	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30*	—
Divided Highway	W6-1	2C.22	36 x 36	36 x 36	48 x 48	48 x 48	—	—
Divided Highway Ends	W6-2	2C.23	36 x 36	36 x 36	48 x 48	48 x 48	—	—
Two-Way Traffic	W6-3	2C.44	36 x 36	36 x 36	48 x 48	48 x 48	—	—
Hill	W7-1	2C.16	30 x 30*	36 x 36	36 x 36	36 x 36	24 x 24*	48 x 48
Hill with Grade	W7-1a	2C.16	30 x 30*	36 x 36	36 x 36	36 x 36	24 x 24*	48 x 48
Use Low Gear (plaque)	W7-2P	2C.57	24 x 18	24 x 18	—	—	—	—
Trucks Use Lower Gear (plaque)	W7-2bP	2C.57	24 x 18	24 x 18	—	—	—	—
XX% Grade (plaque)	W7-3P	2C.57	24 x 18	24 x 18	—	—	—	—
Next XX Miles (plaque)	W7-3aP	2C.55	24 x 18	24 x 18	—	—	—	—
XX% Grade, XX Miles (plaque)	W7-3bP	2C.57	24 x 18	24 x 18	—	—	—	—
Runaway Truck Ramp XX Miles	W7-4	2C.17	78 x 48	78 x 48	78 x 48	78 x 48	—	—
Runaway Truck Ramp (with arrow)	W7-4b	2C.17	78 x 60	78 x 60	78 x 60	78 x 60	—	—
Truck Escape Ramp	W7-4c	2C.17	78 x 60	78 x 60	78 x 60	78 x 60	—	—
Sand, Gravel, Paved (plaques)	W7-4dP, 4eP,4fP	2C.17	24 x 12	24 x 12	24 x 12	24 x 12	—	—
Hill Blocks View	W7-6	2C.18	30 x 30*	36 x 36	36 x 36	—	—	48 x 48
Bump or Dip	W8-1,2	2C.28	30 x 30*	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48



Chapter 2C Warning

Page 106

2009 Edition

Table 2C-2. Warning Sign and Plaque Sizes (Sheet 2 of 3)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Pavement Ends	W8-3	2C.30	36 x 36	36 x 36	48 x 48	—	30 x 30*	—
Soft Shoulder	W8-4	2C.31	36 x 36	36 x 36	48 x 48	48 x 48	24 x 24*	48 x 48
Slippery When Wet	W8-5	2C.32	30 x 30*	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Road Condition (plaques)	W8-5P,5bP,5cP	2C.32	24 x 18	24 x 18	30 x 24	36 x 30	—	36 x 30
Ice	W8-5aP	2C.32	24 x 12	24 x 12	30 x 18	30 x 18	—	—
Truck Crossing	W8-6	2C.49	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Loose Gravel	W8-7	2C.32	36 x 36	36 x 36	36 x 36	—	24 x 24*	48 x 48
Rough Road	W8-8	2C.32	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Low Shoulder	W8-9	2C.31	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Uneven Lanes	W8-11	2C.32	36 x 36	36 x 36	36 x 36	48 x 48	—	48 x 48
No Center Line	W8-12	2C.34	36 x 36	36 x 36	36 x 36	48 x 48	—	—
Bridge Ices Before Road	W8-13	2C.32	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Fallen Rocks	W8-14	2C.32	30 x 30*	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Grooved Pavement	W8-15	2C.33	30 x 30*	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Motorcycle (plaque)	W8-15P	2C.33	24 x 18	24 x 18	30 x 24	36 x 30	—	36 x 30
Metal Bridge Deck	W8-16	2C.33	30 x 30*	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Shoulder Drop Off (symbol)	W8-17	2C.31	30 x 30*	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Shoulder Drop-Off (plaque)	W8-17P	2C.31	24 x 18	24 x 18	30 x 24	36 x 30	—	36 x 30
Road May Flood	W8-18	2C.35	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Flood Gauge	W8-19	2C.35	12 x 72	12 x 72	—	—	—	—
Gusty Winds Area	W8-21	2C.35	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Fog Area	W8-22	2C.35	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
No Shoulder	W8-23	2C.31	36 x 36	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Shoulder Ends	W8-25	2C.31	30 x 30*	36 x 36	36 x 36	48 x 48	24 x 24*	48 x 48
Left (Right) Lane Ends	W9-1	2C.42	36 x 36	36 x 36	36 x 36	48 x 48	30 x 30*	48 x 48
Lane Ends Merge Left (Right)	W9-2	2C.42	36 x 36	36 x 36	36 x 36	48 x 48	30 x 30*	48 x 48
Right (Left) Lane Exit Only Ahead	W9-7	2C.43	132 x 72	132 x 72	132 x 72	132 x 72	—	—
Bicycle	W11-1	2C.49	30 x 30	30 x 30	36 x 36	—	24 x 24*	48 x 48
Pedestrian	W11-2	2C.50	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Large Animals	W11-3,4,16,17,18,19,20,21,22	2C.50	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Farm Vehicle	W11-5,5a	2C.49	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Snowmobile	W11-6	2C.50	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Equestrian	W11-7	2C.50	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Emergency Vehicle	W11-8	2C.49	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Handicapped	W11-9	2C.50	30 x 30*	36 x 36	36 x 36	—	—	48 x 48
Truck	W11-10	2C.49	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Golf Cart	W11-11	2C.49	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Emergency Signal Ahead (plaque)	W11-12P	2C.49	36 x 30	36 x 30	36 x 30	—	—	—
Horse-Drawn Vehicle	W11-14	2C.49	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Bicycle / Pedestrian	W11-15	2C.49	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Trail Crossing	W11-15a	2C.49	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Trail X-ing (plaque)	W11-15P	2C.49	24 x 18	24 x 18	30 x 24	—	—	36 x 30
Double Arrow	W12-1	2C.25	30 x 30*	36 x 36	36 x 36	—	—	—
Low Clearance (with arrows)	W12-2	2C.27	36 x 36	36 x 36	48 x 48	48 x 48	30 x 30*	—
Low Clearance	W12-2a	2C.27	78 x 24	78 x 24	—	—	—	—
Advisory Speed (plaque)	W13-1P	2C.08	18 x 18	18 x 18	24 x 24	30 x 30	—	30 x 30
Advisory Exit or Ramp Speed	W13-2,3	2C.14	24 x 30	24 x 30	36 x 48	36 x 48	—	48 x 60
Combination Horizontal Alignment/Advisory Exit or Ramp Speed	W13-6,7	2C.15	24 x 42	24 x 42	36 x 60	36 x 60	—	48 x 84
Dead End, No Outlet	W14-1,2	2C.26	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48

Chapter 2C Warning

2009 Edition

Page 107

Table 2C-2. Warning Sign and Plaque Sizes (Sheet 3 of 3)

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Minimum	Oversized
			Single Lane	Multi-Lane				
Dead End, No Outlet (with arrow)	W14-1a,2a	2C.26	36 x 8	36 x 8	—	—	—	—
No Passing Zone (pennant)	W14-3	2C.45	48 x 48 x 36	48 x 48 x 36	—	—	40 x 40 x 30	64 x 64 x 48
Playground	W15-1	2C.51	30 x 30*	36 x 36	36 x 36	—	24 x 24*	48 x 48
Share the Road (plaque)	W16-1P	2C.60	18 x 24	18 x 24	24 x 30	—	—	24 x 30
XX Feet	W16-2P	2C.55	24 x 18	24 x 18	—	—	—	30 x 24
XX Ft	W16-2aP	2C.55	24 x 12	24 x 12	—	—	—	30 x 18
XX Miles (2-line plaque)	W16-3P	2C.55	30 x 24	30 x 24	—	—	—	—
XX Miles (1-line plaque)	W16-3aP	2C.55	30 x 12	30 x 12	—	—	—	—
Next XX Feet (plaque)	W16-4P	2C.55	30 x 24	30 x 24	—	—	—	—
Supplemental Arrow (plaque)	W16-5P,6P	2C.56	24 x 18	24 x 18	—	—	—	—
Downward Diagonal Arrow (plaque)	W16-7P	2C.50	24 x 12	24 x 12	—	—	—	30 x 18
Advance Street Name (1-line plaque)	W16-8P	2C.58	Varies x 8	Varies x 8	—	—	—	—
Advance Street Name (2-line plaque)	W16-8aP	2C.58	Varies x 15	Varies x 15	—	—	—	—
Ahead (plaque)	W16-9P	2C.50	24 x 12	24 x 12	30 x 18	—	—	—
Photo Enforced (symbol plaque)	W16-10P	2C.61	24 x 12	24 x 12	36 x 18	—	—	48 x 24
Photo Enforced (plaque)	W16-10aP	2C.61	24 x 18	24 x 18	36 x 30	—	—	48 x 36
HOV (plaque)	W16-11P	2G.09	24 x 12	24 x 12	30 x 18	—	—	30 x 18
Traffic Circle (plaque)	W16-12P	2C.46	24 x 18	24 x 18	—	—	—	—
When Flashing (plaque)	W16-13P	2C.50	24 x 18	24 x 18	—	—	—	—
New (plaque)	W16-15P	2C.62	24 x 12	24 x 12	—	—	—	—
Roundabout (plaque)	W16-17P	2C.46	24 x 12	24 x 12	—	—	—	—
NOTICE	W16-18P	2A.15	24 x 12	24 x 12	—	—	—	—
Speed Hump	W17-1	2C.29	30 x 30*	36 x 36	—	—	24 x 24*	48 x 48
Freeway Ends XX Miles	W19-1	2C.24	—	—	—	144 x 48	—	—
Expressway Ends XX Miles	W19-2	2C.24	—	—	144 x 48	—	—	—
Freeway Ends	W19-3	2C.24	—	—	—	48 x 48	—	—
Expressway Ends	W19-4	2C.24	—	—	48 x 48	—	—	—
All Traffic Must Exit	W19-5	2C.24	—	—	90 x 48	90 x 48	—	—
New Traffic Pattern Ahead	W23-2	2C.52	36 x 36	36 x 36	—	—	—	—
Traffic Signal Extended Green	W25-1,2	2C.48	24 x 30	24 x 30	—	—	—	—

* The minimum size required for diamond-shaped warning signs facing traffic on multi-lane conventional roads shall be 36 x 36 per Section 2C.04

Notes: 1. Larger signs may be used when appropriate
2. Dimensions in inches are shown as width x height

Support:

- 02 Section 2A.11 contains information regarding the applicability of the various columns in Table 2C-2.

Standard:

- 03 Except as provided in Paragraph 5, the minimum size for all diamond-shaped warning signs facing traffic on a multi-lane conventional road where the posted speed limit is higher than 35 mph shall be 36 x 36 inches.

- 04 The minimum size for supplemental warning plaques that are not included in Table 2C-2 shall be as shown in Table 2C-3.

Option:

- 05 If a diamond-shaped warning sign is placed on the left-hand side of a multi-lane roadway to supplement the installation of the same warning sign on the right-hand side of the roadway, the minimum size identified in the Single Lane column in Table 2C-2 may be used.

December 2009

Sect. 2C.04

Page 2C-10

Table 2C-3. Minimum Size of Supplemental Warning Plaques

Size of Warning Sign	Size of Supplemental Plaque			
	Rectangular			Square
	1 Line	2 Lines	Arrow	
24 x 24	24 x 12	24 x 18	24 x 12	18 x 18
30 x 30	—	—	—	—
36 x 36	30 x 18	30 x 24	30 x 18	24 x 24
48 x 48	—	—	—	—

Notes: 1. Larger supplemental plaques may be used when appropriate
2. Dimensions in inches are shown as width x height

Chapter 2C
Warning

NDOT Signs Sizes

Type	Code	W	H	Type	Code	W	H
WNV	1 - 1	V	x 30	WNV	15 - 8	36	x 36
WNV	1 - 2	V	x 30	WNV	15 - 8	48	x 48
WNV	1 - 3	V	x 30	WNV	16 - 1	108	x 60
WNV	2 - 1	96	x 60	WNV	16 - 2	48	x 24
WNV	3 - 1	36	x 30	WNV	16 - 3	48	x 24
WNV	4 - 1	36	x 36	WNV	16 - 4	40	x 36
WNV	4 - 1	48	x 48	WNV	16 - 5	78	x 48
WNV	5 - 1	108	x 48	WNV	17 - 1	36	x 36
WNV	5 - 1	180	x 72	WNV	17 - 1	48	x 48
WNV	6 - 1	36	x 36	WNV	18 - 1	36	x 42
WNV	6 - 1	48	x 48	WNV	18 - 1	54	x 60
WNV	7 - 1	54	x 66	WNV	19 - 2	42	x 42
WNV	7 - 1	90	x 102	WNV	20 - 1	30	x 24
WNV	7 - 2	72	x 48	WNV	21 - 1	30	x 48
WNV	7 - 2	102	x 72	WNV	22 - 1	36	x 36
WNV	8 - 1	36	x 36	WNV	22 - 1	48	x 48
WNV	8 - 1	48	x 48	WNV	23 - 1	36	x 36
WNV	9 - 1	36	x 36	WNV	23 - 1	48	x 48
WNV	9 - 1	48	x 48	WNV	24 - 1	36	x 36
WNV	10 - 1	36	x 36	WNV	24 - 1	48	x 48
WNV	10 - 1	48	x 48	WNV	25 - 1	42	x 54
WNV	11 - 1	36	x 36	WNV	26 - 1	36	x 36
WNV	11 - 1	48	x 48	WNV	26 - 1	48	x 48
WNV	12 - 1	36	x 36	WNV	27 - 1	36	x 36
WNV	12 - 1	48	x 48	WNV	27 - 1	48	x 48
WNV	12 - 2	36	x 36	WNV	27 - 2	36	x 36
WNV	12 - 2	48	x 48	WNV	27 - 2	48	x 48
WNV	12 - 3	36	x 36	WNV	28 - 1	36	x 36
WNV	12 - 3	48	x 48	WNV	28 - 1	48	x 48
WNV	13 - 1	24	x 18	WNV	29 - 1	36	x 36
WNV	14 - 1	36	x 36	WNV	29 - 1	48	x 48
WNV	14 - 1	48	x 48	WNV	30 - 1	36	x 36
WNV	15 - 1	36	x 36	WNV	31 - 1	36	x 36
WNV	15 - 1	48	x 48	WNV	31 - 1	48	x 48
WNV	15 - 2	36	x 36	WNV	31 - 2	36	x 36
WNV	15 - 2	48	x 48	WNV	31 - 2	48	x 48
WNV	15 - 3	36	x 36				
WNV	15 - 3	48	x 48				
WNV	15 - 4	36	x 36				
WNV	15 - 4	48	x 48				
WNV	15 - 5	36	x 36				
WNV	15 - 5	48	x 48				
WNV	15 - 6	36	x 36				
WNV	15 - 6	48	x 48				
WNV	15 - 7	36	x 36				
WNV	15 - 7	48	x 48				



- 06 Signs and plaques larger than those shown in Tables 2C-2 and 2C-3 may be used (see Section 2A.11).

Guidance:

- 07 *The minimum size for all diamond-shaped warning signs facing traffic on exit and entrance ramps should be the size identified in Table 2C-2 for the mainline roadway classification (Expressway or Freeway). If a minimum size is not provided in the Freeway Column, the Expressway size should be used. If a minimum size is not provided in the Freeway or the Expressway Column, the Oversized size should be used.*

Section 2C.05 Placement of Warning Signs

Support:

- 01 For information on placement of warning signs, see Sections 2A.16 to 2A.21.

- 02 The time needed for detection, recognition, decision, and reaction is called the Perception-Response Time (PRT). Table 2C-4 is provided as an aid for determining warning sign location. The distances shown in Table 2C-4 can be adjusted for roadway features, other signing, and to improve visibility.

Guidance:

- 03 *Warning signs should be placed so that they provide an adequate PRT. The distances contained in Table 2C-4 are for guidance purposes and should be applied with engineering judgment. Warning signs should not be placed too far in advance of the condition, such that drivers might tend to forget the warning because of other driving distractions, especially in urban areas.*

Table 2C-4. Guidelines for Advance Placement of Warning Signs

Posted or 85th- Percentile Speed	Condition A: Speed reduction and lane changing in heavy traffic ²	Advance Placement Distance ¹							
		0 ³	10 ⁴	20 ⁴	30 ⁴	40 ⁴	50 ⁴	60 ⁴	70 ⁴
20 mph	225 ft	100 ft ⁶	N/A ⁵	—	—	—	—	—	—
25 mph	325 ft	100 ft ⁶	N/A ⁵	N/A ⁵	—	—	—	—	—
30 mph	460 ft	100 ft ⁶	N/A ⁵	N/A ⁵	—	—	—	—	—
35 mph	565 ft	100 ft ⁶	N/A ⁵	N/A ⁵	N/A ⁵	—	—	—	—
40 mph	670 ft	125 ft	100 ft ⁶	100 ft ⁶	N/A ⁵	—	—	—	—
45 mph	775 ft	175 ft	125 ft	100 ft ⁶	100 ft ⁶	N/A ⁵	—	—	—
50 mph	885 ft	250 ft	200 ft	175 ft	125 ft	100 ft ⁶	—	—	—
55 mph	990 ft	325 ft	275 ft	225 ft	200 ft	125 ft	N/A ⁵	—	—
60 mph	1,100 ft	400 ft	350 ft	325 ft	275 ft	200 ft	100 ft ⁶	—	—
65 mph	1,200 ft	475 ft	450 ft	400 ft	350 ft	275 ft	200 ft	100 ft ⁶	—
70 mph	1,250 ft	550 ft	525 ft	500 ft	450 ft	375 ft	275 ft	150 ft	—
75 mph	1,350 ft	650 ft	625 ft	600 ft	550 ft	475 ft	375 ft	250 ft	100 ft ⁶

¹The distances are adjusted for a sign legibility distance of 180 feet for Condition A. The distances for Condition B have been adjusted for a sign legibility distance of 250 feet, which is appropriate for an alignment warning symbol sign. For Conditions A and B, warning signs with less than 6-inch legend or more than four words, a minimum of 100 feet should be added to the advance placement distance to provide adequate legibility of the warning sign.

²Typical conditions are locations where the road user must use extra time to adjust speed and change lanes in heavy traffic because of a complex driving situation. Typical signs are Merge and Right Lane Ends. The distances are determined by providing the driver a PRT of 14.0 to 14.5 seconds for vehicle maneuvers (2005 AASHTO Policy, Exhibit 3-3, Decision Sight Distance, Avoidance Maneuver E) minus the legibility distance of 180 feet for the appropriate sign.

³Typical condition is the warning of a potential stop situation. Typical signs are Stop Ahead, Yield Ahead, Signal Ahead, and Intersection Warning signs. The distances are based on the 2005 AASHTO Policy, Exhibit 3-1, Stopping Sight Distance, providing a PRT of 2.5 seconds, a deceleration rate of 11.2 feet/second², minus the sign legibility distance of 180 feet.

⁴Typical conditions are locations where the road user must decrease speed to maneuver through the warned condition. Typical signs are Turn, Curve, Reverse Turn, or Reverse Curve. The distance is determined by providing a 2.5 second PRT, a vehicle deceleration rate of 10 feet/second², minus the sign legibility distance of 250 feet.

⁵No suggested distances are provided for these speeds, as the placement location is dependent on site conditions and other signing. An alignment warning sign may be placed anywhere from the point of curvature up to 100 feet in advance of the curve. However, the alignment warning sign should be installed in advance of the curve and at least 100 feet from any other signs.

⁶The minimum advance placement distance is listed as 100 feet to provide adequate spacing between signs.

Standard:

- 02 In advance of horizontal curves on freeways, on expressways, and on roadways with more than 1,000 AADT that are functionally classified as arterials or collectors, horizontal alignment warning signs shall be used in accordance with Table 2C-5 based on the speed differential between the roadway's posted or statutory speed limit or 85th-percentile speed, whichever is higher, or the prevailing speed on the approach to the curve, and the horizontal curve's advisory speed.

Option:

- 03 Horizontal Alignment Warning signs may also be used on other roadways or on arterial and collector roadways with less than 1,000 AADT based on engineering judgment.

Section 2C.07 Horizontal Alignment Signs (W1-1 through W1-5, W1-11, W1-15)**Standard:**

- 01 If Table 2C-5 indicates that a horizontal alignment sign (see Figure 2C-1) is required, recommended, or allowed, the sign installed in advance of the curve shall be a Curve (W1-2) sign unless a different sign is recommended or allowed by the provisions of this Section.
- 02 A Turn (W1-1) sign shall be used instead of a Curve sign in advance of curves that have advisory speeds of 30 mph or less (see Figure 2C-2).

Guidance:

- 03 Where there are two changes in roadway alignment in opposite directions that are separated by a tangent distance of less than 600 feet, the Reverse Turn (W1-3) sign should be used instead of multiple Turn (W1-1) signs and the Reverse Curve (W1-4) sign should be used instead of multiple Curve (W1-2) signs.

Option:

- 04 A Winding Road (W1-5) sign may be used instead of multiple Turn (W1-1) or Curve (W1-2) signs where there are three or more changes in roadway alignment each separated by a tangent distance of less than 600 feet.

- 05 A NEXT XX MILES (W7-3aP) supplemental distance plaque (see Section 2C.55) may be installed below the Winding Road sign where continuous roadway curves exist for a specific distance.

- 06 If the curve has a change in horizontal alignment of 135 degrees or more, the Hairpin Curve (W1-11) sign may be used instead of a Curve or Turn sign.

- 07 If the curve has a change of direction of approximately 270 degrees, such as on a cloverleaf interchange ramp, the 270-degree Loop (W1-15) sign may be used instead of a Curve or Turn sign.

Guidance:

- 08 When the Hairpin Curve sign or the 270-degree Loop sign is installed, either a One-Direction Large Arrow (W1-6) sign or Chevron Alignment (W1-8) signs should be installed on the outside of the turn or curve.

Table 2C-5. Horizontal Alignment Sign Selection

Type of Horizontal Alignment Sign	Difference Between Speed Limit and Advisory Speed				
	5 mph	10 mph	15 mph	20 mph	25 mph or more
Turn (W1-1), Curve (W1-2), Reverse Turn (W1-3), Reverse Curve (W1-4), Winding Road (W1-5), and Combination Horizontal Alignment/Intersection (W10-1) (see Section 2C.07 to determine which sign to use)	Recommended	Required	Required	Required	Required
Advisory Speed Plaque (W13-1P)	Recommended	Required	Required	Required	Required
Chevrons (W1-8) and/or One Direction Large Arrow (W1-6)	Optional	Recommended	Required	Required	Required
Exit Speed (W13-2) and Ramp Speed (W13-3) on exit ramp	Optional	Optional	Recommended	Required	Required

Note: Required means that the sign and/or plaque shall be used, recommended means that the sign and/or plaque should be used, and optional means that the sign and/or plaque may be used.

See Section 2C.06 for roadways with less than 1,000 ADT.



Section 2C.08 Advisory Speed Plaque (W13-1P)

Option:

- 01 The Advisory Speed (W13-1P) plaque (see Figure 2C-1) may be used to supplement any warning sign to indicate the advisory speed for a condition.

Standard:

- 02 The use of the Advisory Speed plaque for horizontal curves shall be in accordance with the information shown in Table 2C-5. The Advisory Speed plaque shall also be used where an engineering study indicates a need to advise road users of the advisory speed for other roadway conditions.

- 03 If used, the Advisory Speed plaque shall carry the message XX MPH. The speed displayed shall be a multiple of 5 mph.

- 04 Except in emergencies or when the condition is temporary, an Advisory Speed plaque shall not be installed until the advisory speed has been determined by an engineering study.

- 05 The Advisory Speed plaque shall only be used to supplement a warning sign and shall not be installed as a separate sign installation.

- 06 The advisory speed shall be determined by an engineering study that follows established engineering practices.

Support:

- 07 Among the established engineering practices that are appropriate for the determination of the recommended advisory speed for a horizontal curve are the following:

- A. An accelerometer that provides a direct determination of side friction factors
- B. A design speed equation
- C. A traditional ball-bank indicator using the following criteria:
 - 1. 16 degrees of ball-bank for speeds of 20 mph or less
 - 2. 14 degrees of ball-bank for speeds of 25 to 30 mph
 - 3. 12 degrees of ball-bank for speeds of 35 mph and higher

- 08 The 16, 14, and 12 degrees of ball-bank criteria are comparable to the current AASHTO horizontal curve design guidance. Research has shown that drivers often exceed existing posted advisory curve speeds by 7 to 10 mph.

Guidance:

- 09 *The advisory speed should be determined based on free-flowing traffic conditions.*

- 10 *Because changes in conditions, such as roadway geometrics, surface characteristics, or sight distance, might affect the advisory speed, each location should be evaluated periodically or when conditions change.*



2D - Guide

Conventional Roads



Chapter 2D
Guide - Conventional Roads

Page 1 of 3

	M1-1 11		M1-5 164		M1-5 582		M1-6 215
	M1-1 15		M1-5 165		M1-5 592		M1-7 XX
	M1-1 215		M1-5 168		M1-5 593		
	M1-1 515		M1-5 169		M1-5 594		
	M1-4 93		M1-5 170		M1-5 595		
	M1-4 95		M1-5 171		M1-5 599		
	M1-5 146		M1-5 172		M1-5 602		
	M1-5 147		M1-5 173		M1-5 604		
	M1-5 156		M1-5 562		M1-5 610		
	M1-5 157		M1-5 564		M1-5 612		
	M1-5 158		M1-5 573		M1-5 739		
	M1-5 159		M1-5 574				
	M1-5 160		M1-5 578				
	M1-5 161		M1-5 579				
	M1-5 163						



Interstate	US and State	Forest and Recreational	County
 M2-1	 M2-1 A	 M2-1 B	 M2-1 C
 M3-1	 M3-1 A	 M3-1 B	 M3-1 C
 M3-2	 M3-2 A	 M3-2 B	 M3-2 C
 M3-3	 M3-3 A	 M3-3 B	 M3-3 C
 M3-4	 M3-4 A	 M3-4 B	 M3-4 C
 M4-1	 M4-1 A	 M4-1 B	 M4-1 C
 M4-1a	 M4-1a A	 M4-1a B	 M4-1a C
 M4-2	 M4-2 A	 M4-2 B	 M4-2 C
 M4-5	 M4-5 A	 M4-5 B	 M4-5 C
 M4-6	 M4-6 A	 M4-6 B	 M4-6 C
 M4-7	 M4-7 A	 M4-7 B	 M4-7 C
 M4-7a	 M4-7a A	 M4-7a B	 M4-7a C
 M4-14	 M4-14 A	 M4-14 B	 M4-14 C
 M5-1L	 M5-1L A	 M5-1L B	 M5-1L C
 M5-1R	 M5-1R A	 M5-1R B	 M5-1R C
 M5-2L	 M5-2L A	 M5-2L B	 M5-2L C
 M5-2R	 M5-2R A	 M5-2R B	 M5-2R C
 M5-3	 M5-3 A	 M5-3 B	 M5-3 C
 M5-4	 M5-4 A	 M5-4 B	 M5-4 C
 M5-4a	 M5-4a A	 M5-4a B	 M5-4a C
 M5-5	 M5-5 A	 M5-5 B	 M5-5 C
 M5-6	 M5-6 A	 M5-6 B	 M5-6 C



Guide - Conventional Roads

Interstate	US and State	Forest and Recreational	County
M6-1	M6-1 A	M6-1 B	M6-1 C
M6-2L	M6-2LA	M6-2LB	M6-2LC
M6-2R	M6-2RA	M6-2RB	M6-2RC
M6-3	M6-3A	M6-3B	M6-3C
M6-4	M6-4A	M6-4B	M6-4C
M6-5L	M6-5LA	M6-5LB	M6-5LC
M6-5R	M6-5RA	M6-5RB	M6-5RC
M6-6L	M6-6LA	M6-6LB	M6-6LC
M6-6R	M6-6RA	M6-6RB	M6-6RC
M6-7L	M6-7LA	M6-7LB	M6-7LC
M6-7R	M6-7RA	M6-7RB	M6-7RC

Laughlin	D1-1		D3-1 (post mounted)		D4-1		D6-4
Needles Las Vegas	D1-2		D3-1OH (overhead mounted)		D4-2L		D6-4a
Nipton Laughlin Las Vegas	D1-3		D3-2		D4-2R		
	D15-1						
	D15-1a		I3-15				

	D8-1
	D8-2
	D8-3



Table 2D-1. Conventional Road Guide Sign Sizes

Sign	Sign Designation	Section	Conventional Road	Minimum	Oversized
Interstate Route Sign (1 or 2 digits)	M1-1	2D.11	24 x 24	24 x 24	36 x 36
Interstate Route Sign (3 digits)	M1-1	2D.11	30 x 24	30 x 24	45 x 36
Off-Interstate Route Sign (1 or 2 digits)	M1-2,3	2D.11	24 x 24	24 x 24	36 x 36
Off-Interstate Route Sign (3 digits)	M1-2,3	2D.11	30 x 24	30 x 24	45 x 36
U.S. Route Sign (1 or 2 digits)	M1-4	2D.11	24 x 24	24 x 24	36 x 36
U.S. Route Sign (3 digits)	M1-4	2D.11	30 x 24	30 x 24	45 x 36
State Route Sign (1 or 2 digits)	M1-5	2D.11	24 x 24	24 x 24	36 x 36
State Route Sign (3 digits)	M1-5	2D.11	30 x 24	30 x 24	45 x 36
County Route Sign (1, 2, or 3 digits)	M1-6	2D.11	24 x 24	24 x 24	36 x 36
Forest Route (1, 2, or 3 digits)	M1-7	2D.11	24 x 24	18 x 18	36 x 36
Junction	M2-1	2D.13	21 x 15	21 x 15	30 x 21
Combination Junction (2 route signs)	M2-2	2D.14	60 x 48*	—	—
Cardinal Direction	M3-1,2,3,4	2D.15	24 x 12	24 x 12	36 x 18
Alternate	M4-1,1a	2D.17	24 x 12	24 x 12	36 x 18
By-Pass	M4-2	2D.18	24 x 12	24 x 12	36 x 18
Business	M4-3	2D.19	24 x 12	24 x 12	36 x 18
Truck	M4-4	2D.20	24 x 12	24 x 12	36 x 18
To	M4-5	2D.21	24 x 12	24 x 12	36 x 18
End	M4-6	2D.22	24 x 12	24 x 12	36 x 18
Temporary	M4-7,7a	2D.24	24 x 12	24 x 12	36 x 18
Begin	M4-14	2D.23	24 x 12	24 x 12	36 x 18
Advance Turn Arrow	M5-1,2,3	2D.26	21 x 15	21 x 15	—
Lane Designation	M5-4,5,6	2D.27	24 x 18	24 x 18	36 x 24
Directional Arrow	M6-1,2,2a,3,4,5,6,7	2D.28	21 x 15	21 x 15	30 x 21
Destination (1 line)	D1-1	2D.37	Varies x 18	Varies x 18	—
Destination and Distance (1 line)	D1-1a	2D.37	Varies x 18	Varies x 18	—
Circular Intersection Destination (1 line)	D1-1d	2D.38	Varies x 18	Varies x 18	—
Circular Intersection Departure Guide	D1-1e	2D.38	Varies x 42*	—	—
Destination (2 lines)	D1-2	2D.37	Varies x 30	Varies x 30	—
Destination and Distance (2 lines)	D1-2a	2D.37	Varies x 30	Varies x 30	—
Circular Intersection Destination (2 lines)	D1-2d	2D.38	Varies x 30	Varies x 30	—
Destination (3 lines)	D1-3	2D.37	Varies x 42	Varies x 42	—
Destination and Distance (3 lines)	D1-3a	2D.37	Varies x 42	Varies x 42	—
Circular Intersection Destination (3 lines)	D1-3d	2D.38	Varies x 42	Varies x 42	—
Distance (1 line)	D2-1	2D.41	Varies x 18	Varies x 18	—
Distance (2 lines)	D2-2	2D.41	Varies x 30	Varies x 30	—
Distance (3 lines)	D2-3	2D.41	Varies x 42	Varies x 42	—
Street Name (1 line)	D3-1,1a	2D.43	Varies x 12	Varies x 8	Varies x 18
Advance Street Name (2 lines)	D3-2	2D.44	Varies x 30*	—	—
Advance Street Name (3 lines)	D3-2	2D.44	Varies x 42*	—	—
Advance Street Name (4 lines)	D3-2	2D.44	Varies x 60*	—	—
Parking Area	D4-1	2D.47	30 x 24	18 x 15	—
Park - Ride	D4-2	2D.48	30 x 36	24 x 30	36 x 48
National Scenic Byways	D6-4	2D.55	24 x 24	24 x 24	—
National Scenic Byways	D6-4a	2D.55	24 x 12	24 x 12	—
Weigh Station XX Miles	D8-1	2D.49	78 x 60	60 x 48	96 x 72
Weigh Station Next Right	D8-2	2D.49	84 x 72	66 x 54	108 x 90
Weigh Station (with arrow)	D8-3	2D.49	66 x 60	48 x 42	84 x 78
Crossover	D13-1,2	2D.54	60 x 30	60 x 30	78 x 42
Freeway Entrance	D13-3	2D.46	48 x 30	48 x 30	—
Freeway Entrance (with arrow)	D13-3a	2D.46	48 x 42	48 x 42	—
Combination Lane Use / Destination	D15-1	2D.33	Varies x 96	Varies x 96	—
Next Truck Lane XX Miles	D17-1	2D.51	42 x 48	42 x 48	60 x 66
Truck Lane XX Miles	D17-2	2D.51	42 x 42	42 x 42	60 x 54
Slow Vehicle Turn-Out XX Miles	D17-7	2D.52	72 x 42	72 x 42	96 x 54

*The size shown is for a typical sign. The size should be appropriately based on the amount of legend required for the sign.

Notes: 1. Larger signs may be used when appropriate

2. Dimensions in inches are shown as width x height



Typical Route Assemblies



2E - Guide Controlled Access



Guide - Controlled Access

* (EXIT ↓ ONLY) E11-1	EXIT 27 E1-5P 27	EXIT 1 ↑ E5-1a 1	EXIT 16 ↑ E5-1a 16
EXIT E11-1a	EXIT 28 E1-5P 28	EXIT 2 ↑ E5-1a 2	EXIT 17 ↑ E5-1a 17
ONLY E11-1b	EXIT 29 E1-5P 29	EXIT 3A ↑ E5-1a 3A	EXIT 18 ↑ E5-1a 18
** EXIT ONLY E11-1d	EXIT 30 E1-5P 30	EXIT 3B ↑ E5-1a 3B	EXIT 19 ↑ E5-1a 19
** (EXIT ONLY) E11-1e	EXIT 32 E1-5P 32	EXIT 5 ↑ E5-1a 5	EXIT 20 ↑ E5-1a 20
* (↓ EXIT ONLY ↓) E11-1f	EXIT 33 E1-5P 33	EXIT 6 ↑ E5-1a 6	EXIT 21 ↑ E5-1a 21
EXIT 1 E1-5P 1	EXIT 35 E1-5P 35	EXIT 7 ↑ E5-1a 7	EXIT 22 ↑ E5-1a 22
EXIT 2 E1-5P 2	EXIT 37 E1-5P 37	EXIT 8 ↑ E5-1a 8	EXIT 23 ↑ E5-1a 23
EXIT 3A E1-5P 3A	EXIT 38A E1-5P 38A	EXIT 9 ↑ E5-1a 9	EXIT 24 ↑ E5-1a 24
EXIT 3B E1-5P 3B	EXIT 38B E1-5P 38B	EXIT 10 ↑ E5-1a 10	EXIT 25 ↑ E5-1a 25
EXIT 5 E1-5P 5	EXIT 40 E1-5P 40	EXIT 11 ↑ E5-1a 11	EXIT 26 ↑ E5-1a 26
EXIT 6 E1-5P 6	EXIT 41 E1-5P 41	EXIT 12A ↑ E5-1a 12A	EXIT 27 ↑ E5-1a 27
EXIT 7 E1-5P 7	EXIT 43 E1-5P 43	EXIT 12B ↑ E5-1a 12A	EXIT 28 ↑ E5-1a 28
EXIT 8 E1-5P 8	EXIT 45 E1-5P 45	EXIT 13 ↑ E5-1a 13	EXIT 29 ↑ E5-1a 29
EXIT 9 E1-5P 9	EXIT 46 E1-5P 46	EXIT 14 ↑ E5-1a 14	
EXIT 10 E1-5P 10	EXIT 47 E1-5P 47	EXIT 15 ↑ E5-1a 15	
EXIT 11 E1-5P 11	EXIT 48 E1-5P 48		
EXIT 12A E1-5P 12A	EXIT 49 E1-5P 49		
EXIT 12B E1-5P 12B	EXIT 50 E1-5P 50		
EXIT 13 E1-5P 13	EXIT 51 E1-5P 1		
EXIT 14 E1-5P 14	LEFT E1-5aP		
EXIT 15 E1-5P 15	PARK - RIDE NEXT RIGHT E99-1		
EXIT 16 E1-5P 16	PARK - RIDE EXIT XX E99-2 XX		
EXIT 17 E1-5P 17	EXIT E5-1		
EXIT 18 E1-5P 18			
EXIT 19 E1-5P 19			
EXIT 20 E1-5P 20			
EXIT 21 E1-5P 21			
EXIT 23 E1-5P 23			
EXIT 25 E1-5P 25			
EXIT 26 E1-5P 26			



Guide - Controlled Access

	E5-1a 32		E5-1a 50		E6-2 N (YXX)
	E5-1a 33		E5-1a 51		E6-2 E (YXX)
	E5-1a 35	 15 MPH	E13-1P 15		E6-2 S (YXX)
	E5-1a 37	 20 MPH	E13-1P 20		E6-2 W (YXX)
	E5-1a 38A	 25 MPH	E13-1P 25		
	E5-1a 38B	 30 MPH	E13-1P 30		
	E5-1a 40	 35 MPH	E13-1P 35		
		 40 MPH	E13-1P 40		
		 45 MPH	E13-1P 45		
		 50 MPH	E13-1P 50		
		 55 MPH	E13-1P 55		
		 60 MPH	E13-1P 60		

Where Z is
N - North
E - East
S - South
W - West

Where Y is
I - Interstate
U - US Route
N - State Route
C - County


XX is route number



E6-2a Z (YXX)

	E5-1a 41		E5-1a 43		E5-1a 45		E5-1a 46		E5-1a 47		E5-1a 48		E5-1a 49
---	----------	---	----------	---	----------	---	----------	---	----------	---	----------	---	----------

E9-2



M2-2A



GS1-1



GS2-1



GS2-2



Guide - Controlled Access

NDOT - Guide - Controlled Access



GNV4-1



GNV4-2



GNV4-3

NDOT Signs Sizes

Type	Code		W		H
GNV	4	- 1	42	x	24
GNV	4	- 2	60	x	24
GNV	4	- 3	66	x	24



Guide - Controlled Access**Table 2E-1. Freeway or Expressway Guide Sign and Plaque Sizes (Sheet 1 of 2)**

Sign or Plaque	Sign Designation	Section	Minimum Size
Exit Number (plaque)			
1-, 2-Digit Exit Number	E1-5P	2E.31	114 x 30
3-Digit Exit Number	E1-5P	2E.31	132 x 30
1-, 2-Digit Exit Number (with single letter suffix)	E1-5P	2E.31	138 x 30
3-Digit Exit Number (with single letter suffix)	E1-5P	2E.31	156 x 30
1-, 2-Digit Exit Number (with dual letter suffix)	E1-5P	2E.31	168 x 30
3-Digit Exit Number (with dual letter suffix)	E1-5P	2E.31	186 x 30
Left (plaque)	E1-5aP	2E.33	72 x 30
Left Exit Number (plaque)			
1-, 2-Digit Exit Number	E1-5bP	2E.31	114 x 54
3-Digit Exit Number	E1-5bP	2E.31	132 x 54
1-, 2-Digit Exit Number (with single letter suffix)	E1-5bP	2E.31	138 x 54
3-Digit Exit Number (with single letter suffix)	E1-5bP	2E.31	156 x 54
1-, 2-Digit Exit Number (with dual letter suffix)	E1-5bP	2E.31	168 x 54
3-Digit Exit Number (with dual letter suffix)	E1-5bP	2E.31	186 x 54
Next Exit XX Miles (1 line)	—	2E.34	Varies x 24
Next Exit XX Miles (2 lines)	—	2E.34	Varies x 36
Exit Gore (no exit number)	E5-1	2E.37	72 x 60
Exit Gore (with exit number)			
1-, 2-Digit Exit Number	E5-1a	2E.37	78 x 60
3-Digit Exit Number	E5-1a	2E.37	96 x 60
1-Digit Exit Number (with single letter suffix)	E5-1a	2E.37	90 x 60
2-Digit Exit Number (with single letter suffix)	E5-1a	2E.37	108 x 60
3-Digit Exit Number (with single letter suffix)	E5-1a	2E.37	126 x 60
1-Digit Exit Number (with dual letter suffix)	E5-1a	2E.37	120 x 60
2-Digit Exit Number (with dual letter suffix)	E5-1a	2E.37	138 x 60
3-Digit Exit Number (with dual letter suffix)	E5-1a	2E.37	156 x 60
Exit Number (plaque)			
1-, 2-Digit Exit Number	E5-1bP	2E.37	42 x 30
3-Digit Exit Number	E5-1bP	2E.37	60 x 30
1-Digit Exit Number (with single letter suffix)	E5-1bP	2E.37	48 x 30
1-Digit Exit Number (with dual letter suffix)	E5-1bP	2E.37	72 x 30
2-Digit Exit Number (with single or dual letter suffix)	E5-1bP	2E.37	72 x 30
3-Digit Exit Number (with single or dual letter suffix)	E5-1bP	2E.37	72 x 30
Narrow Exit Gore	E5-1c	2E.37	60 x 90*
Pull-Through	E6-2	2E.12	Varies x 120*
Pull-Through	E6-2a	2E.12	Varies x 90*
Exit Only (with arrow)	E11-1,1d	2E.24	174** x 36
Exit	E11-1a	2E.24	66 x 18
Only	E11-1b	2E.24	66 x 18
Exit Only	E11-1c	2E.24	120 x 18
Exit Only (with two arrows)	E11-1e,1f	2E.24	222** x 36
Left	E11-2	2E.40	60 x 18
Exit Gore Advisory Speed (plaque)	E13-1P	2E.37	72 x 24
Exit Direction Advisory Speed	E13-2	2E.36	162 x 24
Interstate Route Sign (1 or 2 digits)	M1-1	2E.27	36 x 36
Interstate Route Sign (3 digits)	M1-1	2E.27	45 x 36
Off-Interstate Route Sign (1 or 2 digits)	M1-2,3	2E.27	36 x 36
Off-Interstate Route Sign (3 digits)	M1-2,3	2E.27	45 x 36
U.S. Route Sign (1 or 2 digits)	M1-4	2E.27	36 x 36
U.S. Route Sign (3 digits)	M1-4	2E.27	45 x 36
State Route Sign (1 or 2 digits)	M1-5	2D.11	36 x 36



Guide - Controlled Access

Table 2E-1. Freeway or Expressway Guide Sign and Plaque Sizes (Sheet 2 of 2)

Sign or Plaque	Sign Designation	Section	Minimum Size
State Route Sign (3 digits)	M1-5	2D.11	45 x 36
County Route Sign (1, 2, or 3 digits)	M1-6	2D.11	36 x 36
Forest Route (1, 2, or 3 digits)	M1-7	2D.11	36 x 36
Eisenhower Interstate System	M1-10,10a	2E.28	36 x 36
Junction	M2-1	2D.13	30 x 21
Combination Junction (2 route signs)	M2-2	2D.14	60 x 48*
Cardinal Direction	M3-1,2,3,4	2D.15	36 x 18
Alternate	M4-1,1a	2D.17	36 x 18
By-Pass	M4-2	2D.18	36 x 18
Business	M4-3	2D.19	36 x 18
Truck	M4-4	2D.20	36 x 18
To	M4-5	2D.21	36 x 18
End	M4-6	2D.22	36 x 18
Temporary	M4-7,7a	2D.24	36 x 18
Begin	M4-14	2D.23	36 x 18
Advance Turn Arrow	M5-1,2,3	2D.26	30 x 21
Lane Designation	M5-4,5,6	2D.27	36 x 24
Directional Arrow	M6-1,2,2a,3,4,5,6,7	2D.28	30 x 21
Destination (1 line)	D1-1	2D.37	Varies x 30
Destination and Distance (1 line)	D1-1a	2D.37	Varies x 30
Destination (2 lines)	D1-2	2D.37	Varies x 54
Destination and Distance (2 lines)	D1-2a	2D.37	Varies x 54
Destination (3 lines)	D1-3	2D.37	Varies x 72
Destination and Distance (3 lines)	D1-3a	2D.37	Varies x 72
Distance (1 line)	D2-1	2D.41	Varies x 30
Distance (2 lines)	D2-2	2D.41	Varies x 54
Distance (3 lines)	D2-3	2D.41	Varies x 72
Street Name	D3-1,1a	2D.43	Varies x 18
Advance Street Name (2 lines)	D3-2	2D.44	Varies x 42*
Advance Street Name (3 lines)	D3-2	2D.44	Varies x 66*
Advance Street Name (4 lines)	D3-2	2D.44	Varies x 84*
Park - Ride	D4-2	2D.48	36 x 48
National Scenic Byways	D6-4	2D.55	24 x 24
National Scenic Byways	D6-4a	2D.55	24 x 12
Weigh Station XX Miles	D8-1	2E.54	96 x 72 (F) 78 x 60 (E)
Weigh Station Next Right	D8-2	2E.54	108 x 90 (F) 84 x 72 (E)
Weigh Station (with arrow)	D8-3	2E.54	84 x 78 (F) 66 x 60 (E)
Crossover	D13-1,2	2D.54	78 x 42
Freeway Entrance	D13-3	2D.46	48 x 30
Freeway Entrance (with arrow)	D13-3a	2D.46	48 x 42
Combination Lane Use / Destination	D15-1	2D.33	Varies x 96
Next Truck Lane XX Miles	D17-1	2D.51	60 x 66
Truck Lane XX Miles	D17-2	2D.51	60 x 54
Slow Vehicle Turn-Out XX Miles	D17-7	2D.52	96 x 54

* The size shown is for a typical sign as illustrated in the figures in Chapters 2D and 2E. The size should be determined based on the amount of legend required for the sign.

** The width shown represents the minimum dimension. The width shall be increased as appropriate to match the width of the guide sign.

Notes: 1. Larger signs may be used when appropriate

2. Dimensions in inches are shown as width x height

3. Where two sizes are shown, the larger size is for freeways (F) and the smaller size is for expressways (E)



Guide - Controlled Access**Table 2E-2. Minimum Letter and Numeral Sizes for Expressway Guide Signs According to Interchange Classification**

Type of Sign	Type of Interchange (see Section 2E.32)				Overhead				
	Major		Intermediate	Minor					
	Category a	Category b							
A. Advance Guide, Exit Direction, and Overhead Guide Signs									
Exit Number Plaques									
Words	10	10	10	8	10				
Numerals & Letters	15	15	15	12	15				
Interstate Route Signs									
Numerals	18	—	—	—	18				
1- or 2-Digit Shields	36 x 36	—	—	—	36 x 36				
3-Digit Shields	45 x 36	—	—	—	45 x 36				
U.S. or State Route Signs									
Numerals	18	18	18	12	18				
1- or 2-Digit Shields	36 x 36	36 x 36	36 x 36	24 x 24	36 x 36				
3-Digit Shields	45 x 36	45 x 36	45 x 36	30 x 24	45 x 36				
U.S. or State Route Text Identification (Example: US 56)									
Numerals & Letters	18	15	15	12	15				
Cardinal Directions									
First Letters	18	15	12	10	15				
Rest of Words	15	12	10	8	12				
Auxiliary and Alternative Route Legends (Examples: JCT, TO, ALT, BUSINESS)									
Words	15	12	10	8	12				
Names of Destinations									
Upper-Case Letters	20	16	13.33	10.67	16				
Lower-Case Letters	15	12	10	8	12				
Distance Numbers	18	15	12	10	15				
Distance Fraction Numerals	12	10	10	8	10				
Distance Words	12	10	10	8	10				
Action Message Words	10	10	10	8	10				
B. Gore Signs									
Words	10	10	10	8	—				
Numerals & Letters	12	12	12	10	—				

Note: Sizes are shown in inches and where applicable are shown as width x height



Table 2E-3. Minimum Letter and Numeral Sizes for Expressway Guide Signs According to Sign Type

Type of Sign	Minimum Size
A. Pull-Through Signs	
Destinations — Upper-Case Letters	13.33
Destinations — Lower-Case Letters	10
Route Signs	
1- or 2-Digit Shields	36 x 36
3-Digit Shields	45 x 36
Cardinal Directions — First Letters	12
Cardinal Directions — Rest of Word	10
B. Supplemental Guide Signs	
Exit Number — Words	8
Exit Number — Numerals and Letters	12
Place Names — Upper-Case Letters	10.67
Place Names — Lower-Case Letters	8
Action Messages	8
Route Signs	
Numerals	12
1- or 2-Digit Shield	24 x 24
3-Digit Shield	30 x 24
C. Interchange Sequence or Community Interchanges Identification Signs	
Words — Upper-Case Letters	10.67
Words — Lower-Case Letters	8
Numerals	10.67
Fraction Numerals	8
Route Signs	
Numerals	12
1- or 2-Digit Shield	24 x 24
3-Digit Shield	30 x 24
D. Next XX Exits Sign	
Place Names — Upper-Case Letters	10.67
Place Names — Lower-Case Letters	8
NEXT XX EXITS — Words	8
NEXT XX EXITS — Number	12

Type of Sign	Minimum Size
E. Distance Signs	
Words — Upper-Case Letters	8
Words — Lower-Case Letters	6
Numerals	8
Route Signs	
Numerals	9
1- or 2-Digit Shield	18 x 18
3-Digit Shield	22.5 x 18
F. General Services Signs (see Chapter 2I)	
Exit Number — Words	8
Exit Number — Numerals and Letters	12
Services	8
G. Rest Area, Scenic Area, and Roadside Area Signs (see Chapter 2I)	
Words	10
Distance Numerals	12
Distance Fraction Numerals	8
Distance Words	8
Action Message Words	10
H. Reference Location Signs (see Chapter 2H)	
Words	4
Numerals	10
I. Boundary and Orientation Signs (see Chapter 2H)	
Words — Upper-Case Letters	8
Words — Lower-Case Letters	6
J. Next Exit and Next Services Signs	
Words and Numerals	8
K. Exit Only Signs	
Words	12
L. Overhead Arrow-Per-Lane and Diagrammatic Signs	
See Table 2E-5	

Note: Sizes are shown in inches and where applicable are shown as width x height



Table 2E-4. Minimum Letter and Numeral Sizes for Freeway Guide Signs According to Interchange Classification

Type of Sign	Type of Interchange (see Section 2E.32)				Overhead				
	Major		Intermediate	Minor					
	Category a	Category b							
A. Advance Guide, Exit Direction, and Overhead Guide Signs									
Exit Number Plaques									
Words	10	10	10	10	10				
Numerals & Letters	15	15	15	15	15				
Interstate Route Signs									
Numerals	24/18	—	—	—	18				
1- or 2-Digit Shields	48 x 48/ 36 x 36	—	—	—	36 x 36				
3-Digit Shields	60 x 48/ 45 x 36	—	—	—	45 x 36				
U.S. or State Route Signs									
Numerals	24/18	18	18	12	18				
1- or 2-Digit Shields	48 x 48/ 36 x 36	36 x 36	36 x 36	24 x 24	36 x 36				
3-Digit Shields	60 x 48/ 45 x 36	45 x 36	45 x 36	30 x 24	45 x 36				
U.S. or State Route Text Identification (Example: US 56)									
Numerals & Letters	18	18/15	15	12	15				
Cardinal Directions									
First Letters	18	15	15	10	15				
Rest of Words	15	12	12	8	12				
Auxiliary and Alternative Route Legends (Examples: JCT, TO, ALT, BUSINESS)									
Words	15	12	12	8	12				
Names of Destinations									
Upper-Case Letters	20	20	16	13.33	16				
Lower-Case Letters	15	15	12	10	12				
Distance Numbers	18	18/15	15	12	15				
Distance Fraction Numerals	12	12/10	10	8	10				
Distance Words	12	12/10	10	8	10				
Action Message Words	12	12/10	10	8	10				
B. Gore Signs									
Words	12	12	12	8	—				
Numeral & Letters	18	18	18	12	—				

Notes: 1. Sizes are shown in inches and where applicable are shown as width x height
 2. Slanted line (/) signifies separation of desirable and minimum sizes



Guide - Controlled Access
Table 2E-4. Minimum Letter and Numeral Sizes for Freeway
Guide Signs According to Interchange Classification

Type of Sign	Type of Interchange (see Section 2E.32)				Overhead				
	Major		Intermediate	Minor					
	Category a	Category b							
A. Advance Guide, Exit Direction, and Overhead Guide Signs									
Exit Number Plaques									
Words	10	10	10	10	10				
Numerals & Letters	15	15	15	15	15				
Interstate Route Signs									
Numerals	24/18	—	—	—	18				
1- or 2-Digit Shields	48 x 48/ 36 x 36	—	—	—	36 x 36				
3-Digit Shields	60 x 48/ 45 x 36	—	—	—	45 x 36				
U.S. or State Route Signs									
Numerals	24/18	18	18	12	18				
1- or 2-Digit Shields	48 x 48/ 36 x 36	36 x 36	36 x 36	24 x 24	36 x 36				
3-Digit Shields	60 x 48/ 45 x 36	45 x 36	45 x 36	30 x 24	45 x 36				
U.S. or State Route Text Identification (Example: US 56)									
Numerals & Letters	18	18/15	15	12	15				
Cardinal Directions									
First Letters	18	15	15	10	15				
Rest of Words	15	12	12	8	12				
Auxiliary and Alternative Route Legends (Examples: JCT, TO, ALT, BUSINESS)									
Words	15	12	12	8	12				
Names of Destinations									
Upper-Case Letters	20	20	16	13.33	16				
Lower-Case Letters	15	15	12	10	12				
Distance Numbers	18	18/15	15	12	15				
Distance Fraction Numerals	12	12/10	10	8	10				
Distance Words	12	12/10	10	8	10				
Action Message Words	12	12/10	10	8	10				
B. Gore Signs									
Words	12	12	12	8	—				
Numeral & Letters	18	18	18	12	—				






Notes: 1. Sizes are shown in inches and where applicable are shown as width x height
 2. Slanted line (/) signifies separation of desirable and minimum sizes




Overhead EXIT sign alignment

Advance of Gore


At Gore

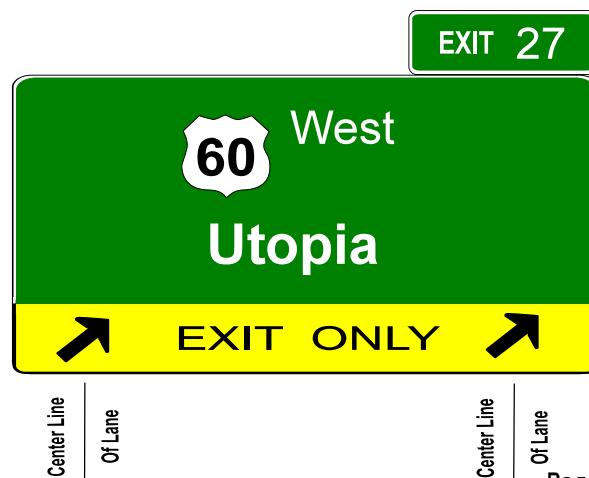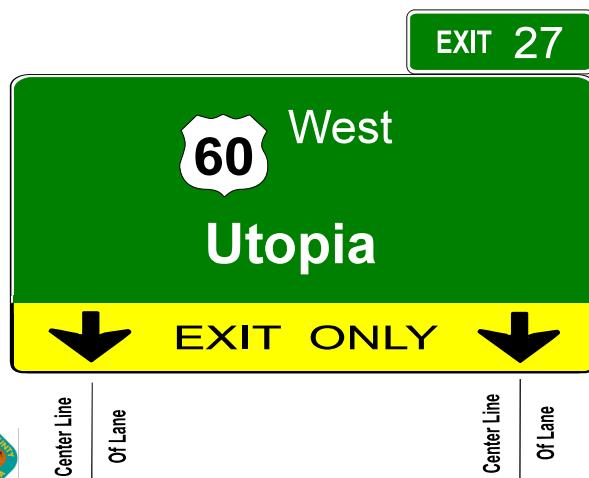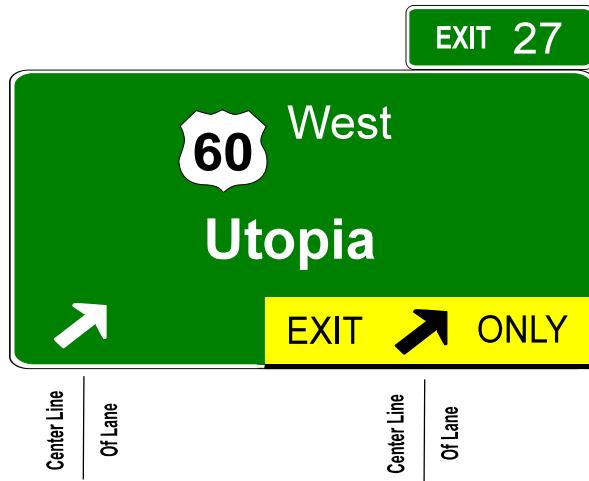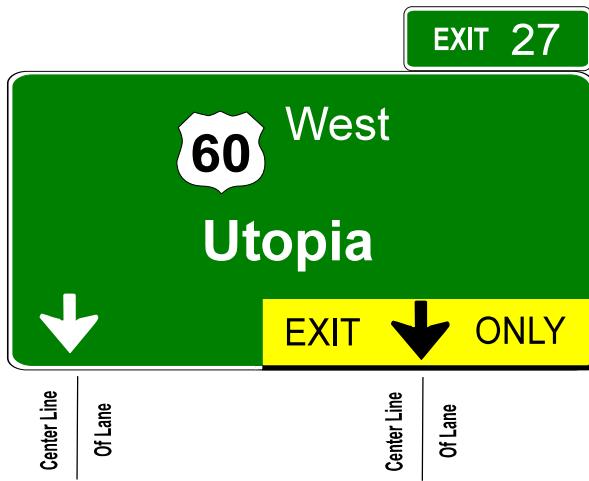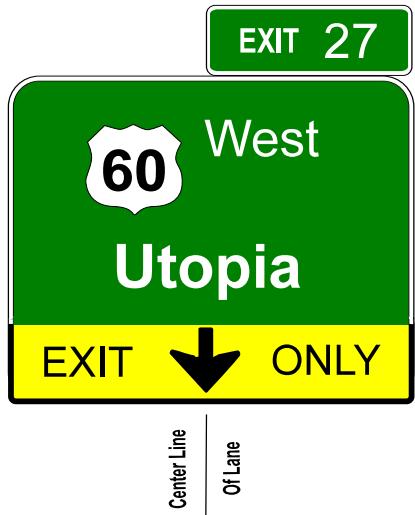


Chapter 2E
Guide - Controlled Access
E11-1 panels

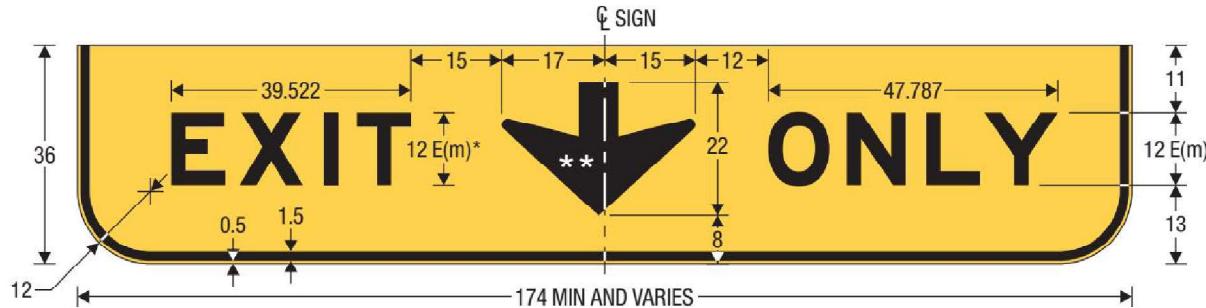

E11-1
EXIT ONLY (DOWN ARROW)

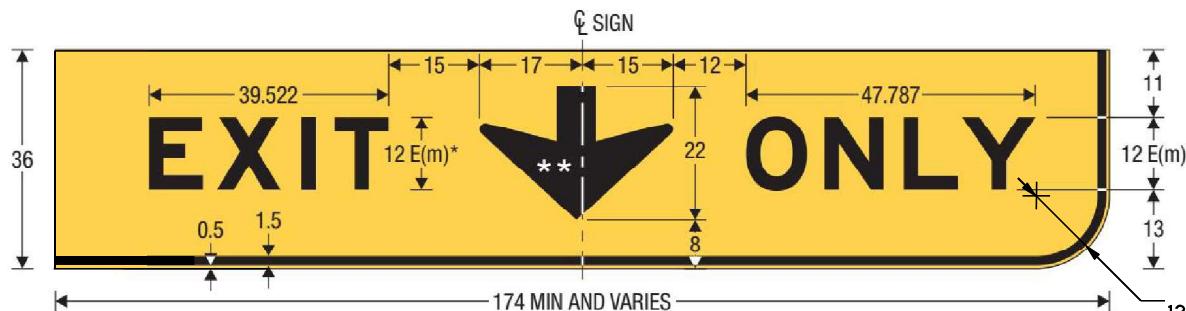

E11-1R
EXIT ONLY (DOWN ARROW)
NOTE: E11-1L would be for left lane exit.

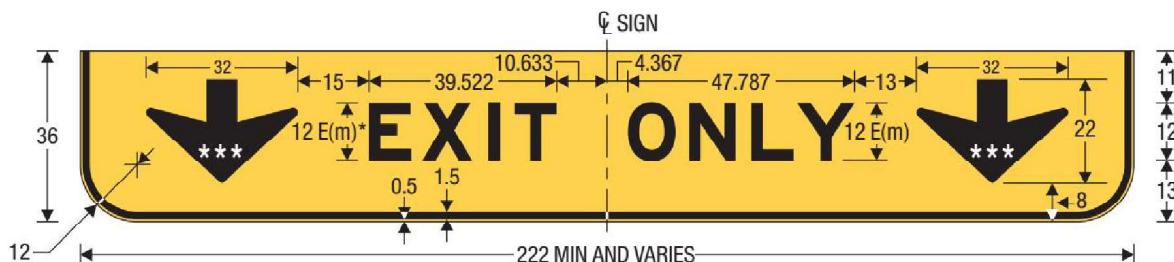


E11-1f
EXIT ONLY (2 DOWN ARROWS)

Colors: LEGEND and BORDER - Black
BACKGROUND - Fluorescent Yellow Reflective
NOTE: Legend and Border to be silk screened, not film.




Chapter 2E
Guide - Controlled Access

E11-1 panels

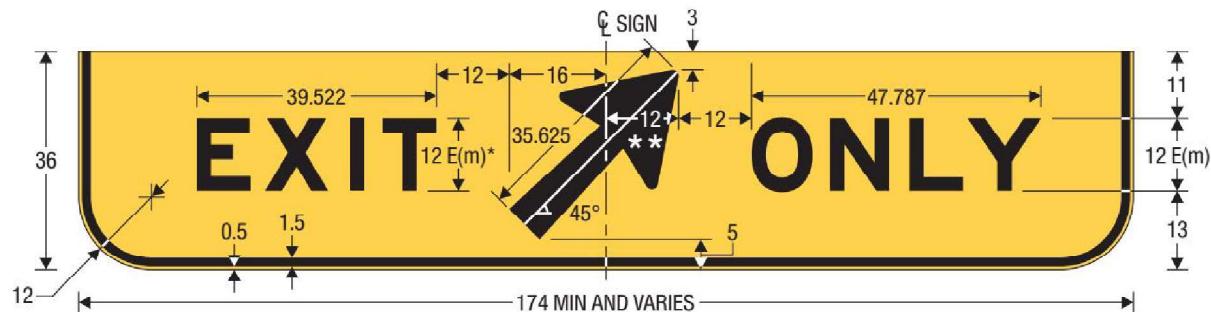

E11-1d
EXIT ONLY (EXIT DIRECTION)

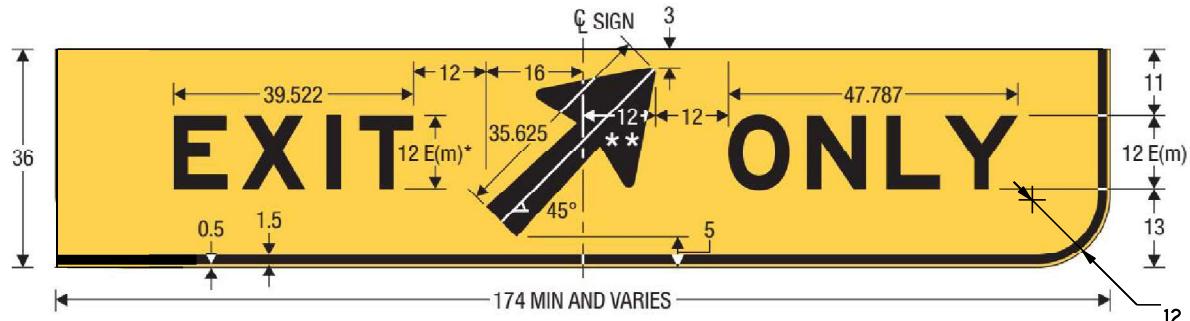

E11-1dR
EXIT ONLY (EXIT DIRECTION)
NOTE: E11-1dL would be for left lane exit.



E11-1e
EXIT ONLY (EXIT DIRECTION)

Colors: LEGEND and BORDER - Black
BACKGROUND - Fluorescent Yellow Rectroreflective
NOTE: Legend and Border to be silk screened Black, not film.




Chapter 2G
Preferential and Managed Lanes

2G - Preferential and Managed Lanes



Preferential and Managed Lanes

R3-10		R3-15b			W4-1Lm		E8-1
R3-11		R3-15c			W4-1Rm		E8-1a
R3-11c					W4-2Lm		E8-2
R3-11P					W4-2Rm		E8-2a
R3-12							E8-3
R3-12a					W13-2m 20		E8-4
R3-12b							E1-5aP
R3-12c					W13-2m 25		
R3-12d					W13-2m 30		
R3-12e					W13-2m 35		
R3-13		R3-13a			W13-2m 40		
R3-13a					W13-2m 45		
R3-14		R3-14a			W13-2m 50		
R3-14a		R3-14b			W13-2m 55		
R3-15		R3-15a			W16-11P		
							



Preferential and Managed Lanes

Table 2G-1. Managed and Preferential Lanes Sign and Plaque Minimum Sizes

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Freeway	Oversized
			Single Lane	Multi-Lane			
Preferential Lane Vehicle Occupancy Definition (post-mounted)	R3-10,10a	2G.04	30 x 42	30 x 42	36 x 60	78 x 96	78 x 96
Preferential Lane Periods of Operation (post-mounted)	R3-11 series	2G.05	30 x 42	30 x 42	36 x 60	78 x 96	78 x 96
Motorcycles Allowed (plaque)	R3-11P	2G.03	30 x 15	30 x 15	36 x 18	78 x 36	78 x 36
Preferential Lane Ahead or Ends (post-mounted)	R3-12 series	2G.06	30 x 42	30 x 42	36 x 60	48 x 84	48 x 84
Preferential Lane Vehicle Occupancy Definition (overhead)	R3-13,13a	2G.04	66 x 36	66 x 36	84 x 48	144 x 78	144 x 78
HOV Lane Periods of Operation (overhead)	R3-14,14a,14b	2G.05	72 x 60	72 x 60	96 x 72	144 x 108	144 x 108
Preferential Lane Periods of Operation (overhead)	R3-14c	2G.05	90 x 60	90 x 60	108 x 72	156 x 102	168 x 102
HOV Lane Ahead (overhead)	R3-15	2G.06	66 x 36	66 x 36	84 x 48	102 x 60	102 x 60
HOV Lane Begins XX Miles (overhead)	R3-15a	2G.06	78 x 42	78 x 42	102 x 54	132 x 72	132 x 72
HOV Lane Ends (overhead)	R3-15b,15c	2G.07	66 x 36	66 x 36	84 x 48	102 x 60	102 x 60
Preferential Lane Ahead or Ends (overhead)	R3-15d,15e	2G.07	42 x 36	42 x 36	54 x 48	72 x 60	72 x 60
Priced Managed Lane Vehicle Occupancy Definition (post-mounted)	R3-40	2G.17	—	—	54 x 66	54 x 66	66 x 78
Priced Managed Lane Ends (post-mounted)	R3-42,42b	2G.17	—	—	48 x 60	48 x 60	60 x 78
Priced Managed Lane Ends Advance (post-mounted)	R3-42a,42c	2G.17	—	—	48 x 66	48 x 66	60 x 84
Priced Managed Lane Vehicle Occupancy Definition	R3-43	2G.17	—	—	138 x 66	138 x 66	—
Priced Managed Lane Periods of Operation (overhead)	R3-44	2G.17	—	—	90 x 84	90 x 84	—
Priced Managed Lane Periods of Operation (overhead)	R3-44a	2G.17	—	—	132 x 84	132 x 84	—
Priced Managed Lane Ends (overhead)	R3-45	2G.17	—	—	90 x 66	90 x 66	—
Priced Managed Lane Ends (overhead)	R3-45a	2G.17	—	—	114 x 66	114 x 66	—
Priced Managed Lane Toll Rate	R3-48	2G.17	—	—	Varies	Varies	—
Priced Managed Lane Toll Rate	R3-48a	2G.17	—	—	Varies	Varies	—
HOV (plaque)	W16-11P	2G.09	24 x 12	24 x 12	30 x 18	30 x 18	30 x 18
Preferential Lane Entrance Gore	E8-1	2G.10	—	—	48 x 96	48 x 96	—
Preferential Lane Intermediate Entrance Gore	E8-1a	2G.10	—	—	48 x 84	48 x 84	—
Preferential Lane Entrance Direction (overhead)	E8-2	2G.11	—	—	222 x 72	222 x 72	—
Preferential Lane Entrance Direction (post-mounted)	E8-2a	2G.11	—	—	186 x 108	186 x 108	—
Preferential Lane Entrance Advance	E8-3	2G.11	—	—	186 x 96	186 x 96	—
Preferential Lane Direct Exit Gore	E8-4	2G.15	—	—	60 x 78	60 x 78	—
Preferential Lane Intermediate Egress Direction	E8-5	2G.13	—	—	Varies x 90	Varies x 90	—
Preferential Lane Intermediate Egress Advance	E8-6	2G.13	—	—	Varies x 84	Varies x 84	—

Notes: 1. Larger signs may be used when appropriate
 2. Dimensions in inches are shown as width x height



Chapter 2H
General Information

2H - General Information



General Information

	I1-1 25		I2-1		M5-1L G		I-90
	I1-1 30		I2-2		M5-1R G		I-99
	I1-1 35		I3-4		M5-2L G		
	I1-1 40		I3-5		M5-2R G		
	I1-1 45		I3-6		M6-1 G		
			I3-7		M6-2L G		
			I4-1		M6-2R G		
			I4-2		M6-3 G		
			I3-8				



General Information

	D10-4 1E		D10-4 1W		D10-4 12E		D10-4 12W
	D10-4 2E		D10-4 2W		D10-4C 13E		D10-4C 13W
	D10-4 3E		D10-4 3W		D10-4C 14E		D10-4C 14W
	D10-4 4E		D10-4 4W		D10-4C 15E		D10-4C 15W
	D10-4 5E		D10-4 5W		D10-4C 16E		D10-4C 16W
	D10-4 6E		D10-4 6W		D10-4C 17E		D10-4C 17W
	D10-4 7E		D10-4 7W		D10-4C 18E		D10-4C 18W
	D10-4 8E		D10-4 8W		D10-4C 19S		D10-4C 19N
	D10-4 9E		D10-4 9W		D10-4C 20S		D10-4C 20N
	D10-4 10E		D10-4 10W		D10-4C 21S		D10-4C 21N
	D10-4 11E		D10-4 11W		D10-4C 22S		D10-4C 22N



General Information

D10-4C 23S	D10-4C 23N	D10-4C 34S	D10-4C 34N
D10-4C 24S	D10-4C 24N	D10-4C 35S	D10-4C 35N
D10-4C 25S	D10-4C 25N	D10-4C 36W	D10-4C 36E
D10-4C 26S	D10-4C 26N	D10-4C 37W	D10-4C 37E
D10-4C 27S	D10-4C 27N	D10-4C 38W	D10-4C 38E
D10-4C 28S	D10-4C 28N	D10-4C 39W	D10-4C 39E
D10-4C 29S	D10-4C 29N	D10-4C 40W	D10-4C 40E
D10-4C 30S	D10-4C 30N	D10-4C 41W	D10-4C 41E
D10-4C 31S	D10-4C 31N	D10-4C 42W	D10-4C 42E
D10-4C 32S	D10-4C 32N	D10-4C 43W	D10-4C 43E
D10-4C 33S	D10-4C 33N	D10-4C 44W	D10-4C 44E



General Information

	D10-4C 45W		D10-4C 45E		D10-1 X
	D10-4C 46W		D10-4C 46E		D10-2 XX
	D10-4C 47W		D10-4C 47E		D10-3 XXX
	D10-4C 48W		D10-4C 48E		D14-2A
	D10-4C 49W		D10-4C 49E		D14-2aP
	D10-4C 50W		D10-4C 50E		CCI2-1
	D10-4C 51W		D10-4C 51E		



CHAPTER 2H. GENERAL INFORMATION SIGNS

Section 2H.01 Sizes of General Information Signs

Standard:

01 Except as provided in Section 2A.11, the sizes of General Information signs that have a standardized design shall be as shown in Table 2H-1.

Support:

02 Section 2A.11 contains information regarding the applicability of the various columns in Table 2H-1.

Option:

03 Signs larger than those shown in Table 2H-1 may be used (see Section 2A.11).

Section 2H.02 General Information Signs (I Series)

Support:

01 Of interest to the traveler, though not directly necessary for guidance, are numerous kinds of information that can properly be conveyed by General Information signs (see Figure 2H-1) or miscellaneous information signs (see Section 2H.04). They include such items as State lines, city limits, other political boundaries, time zones, stream names, elevations, landmarks, and similar items of geographical interest, and safety and transportation-related messages. Chapter 2M contains recreational and cultural interest area symbol signs that are sometimes used in combination with General Information signs.

Guidance:

02 *General Information signs should not be installed within a series of guide signs or at other equally critical locations, unless there are specific reasons for orienting the road user or identifying control points for activities that are clearly in the public interest. On all such signs, the designs should be simple and dignified, devoid of any advertising, and in general compliance with other guide signing.*

Table 2H-1. General Information Sign Sizes

Sign	Sign Designation	Section	Conventional Road	Freeway or Expressway
Reference Location (1 digit)	D10-1	2H.05	10 x 18	12 x 24
Intermediate Reference Location (2 digits)	D10-1a	2H.05	10 x 27	12 x 36
Reference Location (2 digits)	D10-2	2H.05	10 x 27	12 x 36
Intermediate Reference Location (3 digits)	D10-2a	2H.05	10 x 36	12 x 48
Reference Location (3 digits)	D10-3	2H.05	10 x 36	12 x 48
Intermediate Reference Location (4 digits)	D10-3a	2H.05	10 x 48	12 x 60
Enhanced Reference Location	D10-4	2H.06	18 x 54	18 x 54
Intermediate Enhanced Reference Location	D10-5	2H.06	18 x 60	18 x 60
Acknowledgement	D14-1	2H.08	36 x 30*	72 x 48*
Acknowledgement	D14-2	2H.08	36 x 30*	72 x 48*
Acknowledgement	D14-3	2H.08	42 x 24*	96 x 36*
Signals Set for XX MPH	I1-1	2H.03	24 x 36	—
Jurisdictional Boundary	I-2	2H.04	Varies x 18**	Varies x 36**
Geographical Features	I-3	2H.04	Varies x 18**	Varies x 36**
Airport	I-5	2H.02	24 x 24	30 x 30
Bus Station	I-6	2H.02	24 x 24	30 x 30
Train Station	I-7	2H.02	24 x 24	30 x 30
Library	I-8	2H.02	24 x 24	30 x 30
Vehicle Ferry Terminal	I-9	2H.02	24 x 24	30 x 30
Recycling Collection Center	I-11	2H.02	30 x 48	—
Light Rail Transit Station	I-12	2H.02	24 x 24	—

* The size shown is the maximum size for the corresponding roadway classification. The size of the sign and acknowledgement logo should be appropriately reduced where shorter legends are used.

** The size shown is for the typical sign illustrated in the figure. The size should be determined based on the amount of legend required for the sign.

Notes: 1. Larger signs may be used when appropriate, except for the D14 series signs
2. Dimensions in inches are shown as width x height



2I - General Services



Chapter 2I
Service

Page 1 of 2

	D9-1		D9-12		M5-1L
	D9-2		D9-13		M5-1R
	D9-3		D9-13aP		M5-2L
	D9-3a		D9-13bP		M5-2R
	D9-4		D9-13cP		M5-3
	D9-5		D9-13dP		LEFT LANE M5-4
	D9-6P		D9-14		CENTER LANE M5-5
	D9-7		D9-15		RIGHT LANE M5-6
	D9-8		D9-16		M6-1
	D9-9		D9-20		M6-2L
	D9-10		D9-20aP		M6-2R
	D9-11		D9-21		
	D9-11a		D9-22		
	D9-11b		D9-17p XX		
	D9-11bP				
	D9-11c				



Chapter 2I
Service

Page 2 of 2

EXIT 1	E1-5Pb 1	EXIT 33	E1-5Pb 33		D9-18	CHAIN - UP AREA	D5-16
EXIT 2	E1-5Pb 2	EXIT 35	E1-5Pb 35				
EXIT 3A	E1-5Pb 3A	EXIT 37	E1-5Pb 37				
EXIT 3B	E1-5Pb 3B	EXIT 38A	E1-5Pb 38A		D9-18a	WEATHER INFO TUNE RADIO TO 750 AM 1230 AM 96.3 FM	D12-1
EXIT 5	E1-5Pb 5	EXIT 38B	E1-5Pb 38B		D9-18b (XX)	CAR POOL INFO CALL *CAR	D12-2
EXIT 6	E1-5Pb 6	EXIT 40	E1-5Pb 40				
EXIT 7	E1-5Pb 7	EXIT 41	E1-5Pb 41				
EXIT 8	E1-5Pb 8	EXIT 43	E1-5Pb 43				
EXIT 9	E1-5Pb 9	EXIT 45	E1-5Pb 45		D9-18b NR	(AGENCY OR GROUP THAT) MONITORS CB CHANNEL 9	D12-3
EXIT 10	E1-5Pb 10	EXIT 46	E1-5Pb 46			EMERGENCY CALL 911	D12-4
EXIT 11	E1-5Pb 11	EXIT 47	E1-5Pb 47				
EXIT 12A	E1-5Pb 12A	EXIT 48	E1-5Pb 48		D9-18c (XX)		D12-5
EXIT 12B	E1-5Pb 12B	EXIT 49	E1-5Pb 49				
EXIT 13	E1-5Pb 13	EXIT 50	E1-5Pb 50		D9-18c NR		D12-5a
EXIT 14	E1-5Pb 14	EXIT 51	E1-5Pb 1				
EXIT 15	E1-5Pb 15				D5-1		D6-1
EXIT 16	E1-5Pb 16				D5-1a		D6-1a
EXIT 17	E1-5Pb 17				D5-2		D6-2
EXIT 18	E1-5Pb 18				D5-2a		D6-2a
EXIT 19	E1-5Pb 19				D5-5		D6-5
EXIT 20	E1-5Pb 20						
EXIT 21	E1-5Pb 21						
EXIT 23	E1-5Pb 23						
EXIT 25	E1-5Pb 25						
EXIT 26	E1-5Pb 26						
EXIT 27	E1-5Pb 27						
EXIT 28	E1-5Pb 28						
EXIT 29	E1-5Pb 29						
EXIT 30	E1-5Pb 30						
EXIT 32	E1-5Pb 32				D5-15		



Service

NDOT - Service



GNV30-1



GNV30-2



GNV39-1



GNV39-2L



GNV39-2R



GNV39-6



GNV39-7L



GNV39-7R

NDOT Signs Sizes

Type	Code		W		H
GNV	30	- 1	114	x	60
GNV	30	- 2	120	x	60
GNV	39	- 1	96	x	30
GNV	39	- 2	78	x	36
GNV	39	- 6	36	x	18
GNV	39	- 7	24	x	30



CHAPTER 2I. GENERAL SERVICE SIGNS

Section 2I.01 Sizes of General Service Signs

Standard:

01 Except as provided in Section 2A.11, the sizes of General Service signs that have a standardized design shall be as shown in Table 2I-1.

Support:

02 Section 2A.11 contains information regarding the applicability of the various columns in Table 2I-1.

Option:

03 Signs larger than those shown in Table 2I-1 may be used (see Section 2A.11).

Table 2I-1. General Service Sign and Plaque Sizes (Sheet 1 of 2)

Sign or Plaque	Sign Designation	Section	Conventional Road	Freeway or Expressway
Rest Area XX Miles	D5-1	2I.05	66 x 36*	96 x 54*
Rest Area Next Right	D5-1a	2I.05	78 x 36*	120 x 60* (F) 114 x 48* (E)
Rest Area (with arrow)	D5-2	2I.05	66 x 36*	96 x 54*
Rest Area Gore	D5-2a	2I.05	42 x 48*	78 x 78* (F) 66 x 72* (E)
Rest Area (with horizontal arrow)	D5-5	2I.05	42 x 48*	—
Next Rest Area XX Miles	D5-6	2I.05	60 x 48*	90 x 72*
Rest Area Tourist Info Center XX Miles	D5-7	2I.08	90 x 72*	114 x 102* (F) 132 x 96* (E)
Rest Area Tourist Info Center (with arrow)	D5-8	2I.08	84 x 72*	120 x 102* (F) 120 x 96* (E)
Rest Area Tourist Info Center Next Right	D5-11	2I.08	90 x 72*	144 x 102* (F) 132 x 96* (E)
Interstate Oasis	D5-12	2I.04	—	156 x 78
Interstate Oasis (plaque)	D5-12P	2I.04	—	114 x 48
Brake Check Area XX Miles	D5-13	2I.06	84 x 48	126 x 72
Brake Check Area (with arrow)	D5-14	2I.06	78 x 60	96 x 72
Chain-Up Area XX Miles	D5-15	2I.07	66 x 48	96 x 72
Chain-Up Area (with arrow)	D5-16	2I.07	72 x 54	96 x 66
Telephone	D9-1	2I.02	24 x 24	30 x 30
Hospital	D9-2	2I.02	24 x 24	30 x 30
Camping	D9-3	2I.02	24 x 24	30 x 30
Trailer Camping	D9-3a	2I.02	24 x 24	30 x 30
Litter Container	D9-4	2I.02	24 x 30	36 x 48
Handicapped	D9-6	2I.02	24 x 24	30 x 30
Van Accessible (plaque)	D9-6P	2I.02	18 x 9	—
Gas	D9-7	2I.02	24 x 24	30 x 30
Food	D9-8	2I.02	24 x 24	30 x 30
Lodging	D9-9	2I.02	24 x 24	30 x 30
Tourist Information	D9-10	2I.02	24 x 24	30 x 30
Diesel Fuel	D9-11	2I.02	24 x 24	30 x 30
Alternative Fuel - Compressed Natural Gas	D9-11a	2I.02	24 x 24	30 x 30
Electric Vehicle Charging	D9-11b	2I.02	24 x 24	30 x 30
Electric Vehicle Charging (plaque)	D9-11bP	2I.02	24 x 18	30 x 24
Alternative Fuel - Ethanol	D9-11c	2I.02	24 x 24	30 x 30
RV Sanitary Station	D9-12	2I.02	24 x 24	30 x 30
Emergency Medical Services	D9-13	2I.02	24 x 24	30 x 30



Table 2I-1. General Service Sign and Plaque Sizes (Sheet 2 of 2)

Sign or Plaque	Sign Designation	Section	Conventional Road	Freeway or Expressway
Hospital (plaque)	D9-13aP	2I.02	24 x 12	30 x 12
Ambulance Station (plaque)	D9-13bP	2I.02	24 x 12	30 x 15
Emergency Medical Care (plaque)	D9-13cP	2I.02	24 x 18	30 x 24
Trauma Center (plaque)	D9-13dP	2I.02	24 x 12	30 x 15
Police	D9-14	2I.02	24 x 24	30 x 30
Propane Gas	D9-15	2I.02	24 x 24	30 x 30
Truck Parking	D9-16	2I.02	24 x 24	30 x 30
Next Services XX Miles (plaque)	D9-17P	2I.02	102 x 24	156 x 30
General Services (up to 6 symbols)	D9-18	2I.03	—	96 x 60
General Services	D9-18a	2I.03	—	96 x 60
General Services (up to 6 symbols) with Action or Exit Information	D9-18b	2I.03	108 x 84	132 x 114 (F) 132 x 108 (E)
General Services with Action or Exit Information	D9-18c	2I.03	72 x 60**	132 x 108** (F) 108 x 84** (E)
Pharmacy	D9-20	2I.02	24 x 24	30 x 30
24-Hour (plaque)	D9-20aP	2I.02	24 x 12	30 x 12
Telecommunication Device for the Deaf	D9-21	2I.05	24 x 24	30 x 30
Wireless Internet	D9-22	2I.05	24 x 24	30 x 30
Weather Information	D12-1	2I.09	84 x 48	132 x 84
Carpool Information	D12-2	2I.11	60 x 42	96 x 66
Channel 9 Monitored	D12-3	2I.09	84 x 48	132 x 84
Emergency Call 911	D12-4	2I.09	66 x 30	96 x 48
Travel Info Call 511 (pictograph)	D12-5	2I.10	42 x 60	66 x 78
Travel Info Call 511	D12-5a	2I.10	48 x 36	66 x 48

* The size shown is for a sign with a REST AREA and/or TOURIST INFO CENTER legend. The size should be appropriately adjusted if an alternate legend is used.

** The size shown is for a sign with four lines of services. The size should be appropriately adjusted depending on the amount of legend displayed.

Notes: 1. Larger signs may be used when appropriate
2. Dimensions in inches are shown as width x height
3. Where two sizes are shown, the larger size is for freeways (F) and the smaller size is for expressways (E)

Section 2I.02 General Service Signs for Conventional Roads

Support:

- 01 On conventional roads, commercial services such as gas, food, and lodging generally are within sight and are available to the road user at reasonably frequent intervals along the route. Consequently, on this class of road there usually is no need for special signs calling attention to these services. Moreover, General Service signing is usually not required in urban areas except for hospitals, law enforcement assistance, tourist information centers, and camping.

Option:

- 02 General Service signs (see Figure 2I-1) may be used where such services are infrequent and are found only on an intersecting highway or crossroad.

Standard:

- 03 All General Service signs and supplemental sign panels shall have white letters, symbols, arrows, and borders on a blue background.

Guidance:

- 04 General Service signs should be installed at a suitable distance in advance of the turn-off point or intersecting highway.

- 05 States that elect to provide General Service signing should establish a statewide policy or warrant for its use, and criteria for the availability of services. Local jurisdictions electing to use such signing should follow State policy for the sake of uniformity.

Option:

- 06 Individual States may sign for whatever alternative fuels are available at appropriate locations.



2M - Recreational and Cultural Interest Area



Chapter 2M
Recreational

Page 1 of 3


	RS-002		RS-023		RS-044		RS-060
	RS-005		RS-024		RS-045		RS-061
	RS-006		RS-026		RS-046		RS-062
	RS-007		RS-027		RS-047		RS-063
	RS-008		RS-030		RS-048		RS-064
	RS-009		RS-031		RS-049		RS-067
	RS-010		RS-034		RS-050		RS-068
	RS-011		RS-035		RS-052		RS-070
	RS-012		RS-036		RS-053		RS-071
	RS-013		RS-037		RS-054		RS-073
	RS-015		RS-039		RS-055		RS-076
	RS-017		RS-040		RS-056		RS-077
	RS-020		RS-041		RS-057		RS-078
	RS-021		RS-042		RS-058		RS-079
	RS-022		RS-043		RS-059		RS-080

Page 2M-1



Chapter 2M
Recreational

Page 2 of 3

	RS-081		RS-096		RS-113		RS-128
	RS-082		RS-097		RS-114		RS-129
	RS-083		RS-098		RS-115		RS-137
	RS-084		RS-099		RS-116		RS-138
	RS-085		RS-101		RS-117		RS-140
	RS-086		RS-102		RS-118		RS-141
	RS-087		RS-103		RS-119		RS-142
	RS-088		RS-104		RS-120		RS-143
	RS-089		RS-105		RS-121		RS-144
	RS-090		RS-106		RS-122		RS-145
	RS-091		RS-107		RS-123		RS-146
	RS-092		RS-108		RS-124		RS-147
	RS-093		RS-109		RS-125		RS-148
	RS-094		RS-111		RS-126		RS-149
	RS-095		RS-112		RS-127		RS-150



Chapter 2M
Recreational

Page 3 of 3



RS-200



M5-1L B



M5-1R B



M5-2L B



M5-2R B



M5-3 B



M5-4 B



M5-5 B



M5-6 B



M6-1 B



M6-2L B



M6-2R B



M6-3 B



RS-034p

**Red Rock
Canyon
EXIT 26**

D7-1 RRC X26

**Red Rock
Canyon
USE 215 SOUTH**

D7-1 RRC 215

**Valley of Fire
State Park
12 MILES**

D7-1 VOF 12

← Red Rock
Canyon

D7-2 RRC L

**Red Rock →
Canyon**

D7-2 RRC R

**Clark County
Wetlands Park
←**

D7-2 WLP L

**Clark County
Wetlands Park
→**

D7-2 WLP R

**"WELCOME TO
LAS VEGAS"
SIGN**

RS-702



Page 2M-3

Chapter 2M Recreational

Table 2M-1. Category Chart for Recreational and Cultural Interest Area Symbols

General	
Bear Viewing Area	RS-012
Bus Stop	RS-031
Campfires *	RS-042
Cans or Bottles *	RS-101
Cultural Interest Area	RS-142
Dam	RS-009
Deer Viewing Area	RS-011
Falling Rocks *	RS-008
Fire Extinguisher *	RS-090
Lighthouse	RS-007
Lookout Tower	RS-006
Nature Study Area	RS-141
Pets on Leash *	RS-017
Pick-Up Trucks	RS-140
Point of Interest	RS-080
Radios *	RS-103
Rattlesnakes *	RS-099
Recycling *	RS-200
Sea Plane	RS-115
Smoking *	RS-002
Snack Bar *	RS-102
Stay on Trail *	RS-123
Strollers *	RS-111
Tunnel	RS-005
Viewing Area	RS-036
Walk on Boardwalk *	RS-122
Wood Gathering *	RS-120

Services	
Drinking Water	RS-013
Electrical Hook-Up	RS-150
Firewood Cutting *	RS-112
First Aid	RS-024
Grocery Store	RS-020
Kennel	RS-045
Laundromat	RS-085
Litter Receptacle	RS-086
Lockers/Storage *	RS-030
Mechanic	RS-027
Picnic Shelter	RS-039
Picnic Site	RS-044
Post Office	RS-026
Ranger Station	RS-015
Sanitary Station	RS-041
Showers *	RS-035
Stable	RS-073
Theater	RS-109
Trail Shelter *	RS-043
Tramway	RS-071
Trash Dumpster	RS-091

Water Recreation	
Beach	RS-145
Boat Motor	RS-147
Boat Ramp	RS-054
Canoeing	RS-079
Diving	RS-062
Fish Cleaning *	RS-093
Fish Hatchery	RS-010
Fish Laddor *	RS-089
Fishing Area	RS-063
Fishing Pier	RS-119
Hand Launch/Small Boat Launch	RS-117
Jet Ski/Personal Watercraft	RS-121
Kayaking	RS-118
Lifejackets *	RS-094
Marina	RS-053
Motorboating	RS-055
Rafting	RS-146
Rowboating	RS-057
Sailing	RS-056
Scuba Diving	RS-060
Seal Viewing	RS-106
Surfing	RS-059
Swimming	RS-061
Tour Boat	RS-087
Wading	RS-088
Waterskiing	RS-058
Whale Viewing	RS-107
Wind Surfing	RS-108

Accommodations	
Baby Changing Station (Men's Room)	RS-137
Baby Changing Station (Women's Room)	RS-138
Men's Restroom	RS-021
Parking	RS-034
Recreational Vehicle Site	RS-104
Restrooms	RS-022
Sleeping Shelter *	RS-037
Trailer Site	RS-040
Walk-In Camp	RS-148
Women's Restroom	RS-023

Land Recreation	
All-Terrain Trail	RS-095
Amphitheater	RS-070
Archery	RS-116
Baseball *	RS-096
Climbing *	RS-082
Corral	RS-149
Driving Tour	RS-113
Exercise/Fitness	RS-097
Golfing *	RS-128
Hang Gliding	RS-126
Hiking Trail	RS-068
Horse Trail	RS-064
In-Line Skating	RS-125
Interpretive Trail	RS-114
Off-Road Vehicle Trail	RS-067
Rock Collecting *	RS-083
Skateboarding *	RS-098
Spelunking/Caves	RS-084
Technical Rock Climbing	RS-081
Tennis	RS-129
Wildlife Viewing	RS-076

Winter Recreation	
Chair Lift/Ski Lift	RS-105
Cross Country Skiing	RS-046
Dog Sledding	RS-143
Downhill Skiing	RS-047
Ice Fishing	RS-092
Ice Skating	RS-050
Ski Jumping	RS-048
Sledding	RS-049
Snow Tubing	RS-144
Snowboarding	RS-127
Snowmobiling	RS-052
Snowshoeing	RS-078
Winter Recreational Area	RS-077

* For non-road use only



2N - Emergency Management



Chapter 2N
Emergency Management

Page 1 of 1

	EM-2		EM-6aL		EM-7aL (X)
	EM-3		EM-6aS		EM-7aS (X)
	EM-4		EM-6aR		EM-7aR (X)
	EM-5		EM-6bL		EM-7cL (X)
			EM-6bS		EM-7cS (X)
			EM-6bR		EM-7cR (X)
			EM-6cL		EM-7dL (X)
			EM-6cS		EM-7dS (X)
			EM-6cR		EM-7dR (X)
			EM-6dL		
			EM-6dS		
			EM-6dR		

2009 Edition

Page 343

Table 2N-1. Emergency Management Sign Sizes

Sign or Plaque	Sign Designation	Section	Minimum Size
Evacuation Route	EM-1, EM-1a	2N.03	24 x 24*
Area Closed	EM-2	2N.04	30 x 24
Traffic Control Point	EM-3	2N.05	30 x 24
Maintain Top Safe Speed	EM-4	2N.06	24 x 30
Permit Required	EM-5	2N.07	24 x 30
Emergency Aid Center	EM-6a to EM-6d	2N.08	30 x 24
Shelter Directional	EM-7a to EM-7d	2N.09	30 x 24

* A minimum size of 18 x 18 may be used on low-volume roadways or roadways with speeds of 25 mph or less

Notes: 1. Larger signs may be used when appropriate
2. Dimensions in inches are shown as width x height



Page 2N-1

Chapter 6

6 - Construction



Chapter 6

Page 1 of 1A

Section 6F.03 Sign Placement

STANDARD:

05 The minimum height, measured vertically from the bottom of the sign to the top of the curb, or in the absence of elevation of curb, measured vertically from the bottom of the sign to the elevation of the near edge of the traveled way, of signs installed at the side of the road in business, commercial, or residential areas where parking or pedestrian movements are likely to occur, or where the view of the sign might be obstructed, shall be 7 feet.

06 The minimum height, measured vertically from the bottom of the sign to the sidewalk, of signs installed above sidewalks shall be 7 feet.

08 Neither portable nor permanent sign supports should be located on sidewalks, bicycle facilities, or areas designated for pedestrian or bicycle traffic. If the bottom of a secondary sign that is mounted below another sign is mounted lower than 7 feet above a pedestrian sidewalk or pathway (see Section 6D.02), the secondary sign should not project more than 4 inches into the pedestrian facility.

11 Except as provided in Paragraph 12, signs mounted on portable sign supports that do not meet the minimum mounting heights provided in Paragraphs 4 through 6 should not be used for a duration of more than 3 days.

Option:

12 The R9-8 through R9-11a series, R11 series, W1-6 through W1-8 series, M4-10, E5-1, or other similar type signs (see Figures 6F-3, 6F-4, and 6F-5) may be used on portable sign supports that do not meet the minimum mounting heights provided in Paragraphs 4 through 6 for longer than 3 days.




	R9-8		W1-6
	R9-9		W1-7
	R9-10		W1-8
	R9-11L		M4-10L
	R9-11R		M4-10R
	R9-11aL		E5-1
	R9-11aR		
	R11-2		
	R11-2b		
	R11-2c		
	R11-2d		
	R11-3a XX		
	R11-3b XX		
	R11-4		



Chapter 6

Page 1 of 1B

Construction - Regulatory

	R1-1		R3-18		R9-11aL		R2-98
	R1-2		R3-27		R9-11aR		R2-99
	R1-2aP		R4-1		R11-2		
	R1-7		R4-2		R11-2b		R3-99L
	R1-8		R4-7		R11-2c		R3-99R
	G20-5aP (Install above R2-1)				R11-2d		
	R2-1 XX		R4-8		R11-3a XX		
	R3-1		R4-8a		R11-3b XX		
	R3-2		R4-8b		R11-4		
	R3-3		R4-8C (Narrow Width)				
	R3-4		R4-9				
	R3-5L		R5-1				
	R3-5R		R5-1a				
	R3-5S		R6-1R				
	R3-6L		R6-1L				
			R8-3				
	R3-7L		R9-8				
	R3-7R		R9-9				
	R3-8L		R9-10				
			R9-11L				
			R9-11R				

NOTE: Additional Regulatory sign may be found in Part 2B.

Page 6-2



Chapter 6

Construction - Warning

Page 1 of 3C

	W1-1L		W3-1		W5-3		W8-8
	W1-1R		W3-2		W5-4		W8-9
	W1-2L		W3-3		W6-1		W8-11
	W1-2R		W3-4		W6-2		W8-12
	W1-3L		W3-5 XX		W6-3		W8-15
	W1-3R		W4-1L		W6-4		W8-15P Used only with W8-15
	W1-4L		W4-1R		W7-1		W8-17
	W1-4bL		W4-2L		W7-3aP X		W8-17P Used only with W8-17
	W1-4cL		W4-2R		W8-1		W8-23
	W1-4R		W4-3L		W8-2		W8-24
	W1-4bR		W4-3R		W8-2a		W8-25
	W1-4cR		W4-5P		W8-3		W9-1L
	W1-6		W4-7L		W8-4		W9-1R
	W1-7		W4-7R		W8-5		W9-2L
	W1-8		W5-1		W8-6		W9-2R
			W5-2		W8-7		W9-3



Chapter 6 Construction - Warning

Page 2 of 3C

	W11-10		W21-2		W24-1L		E5-2	
	W12-1		W21-2a		W24-1aL		E5-2a	
	W12-2 (XX-Y)		W21-3		W24-1bL		E5-3	
	W13-1P (XX)		W21-4		W24-1R		M4-8	
	W13-4P		W21-5		W24-1aR		M4-8a	
	W14-3		W21-5aL		W24-1bR		M4-8b	
	W20-1		W21-5aR		G20-1 (X)		M4-9L	
	W20-2		W21-5bL		G20-2		M4-9R	
	W20-3		W21-5bR		G20-4		M4-9S	
	W20-4		W21-6				M4-9aL	
	W20-5L		W21-7				M4-9aR	
	W20-5R		W21-8				M4-9aS	
	W20-5aL		W21-8a				M4-9bL	
	W20-5aR		W22-1		W22-2		M4-9bR	
	W20-7				W22-3		M4-9bS	
	W16-2P 500		W23-2				M4-9cL	
	W21-1						M4-9cR	
								M4-9cS
								M4-10L
								M4-10R



Type A - Low-Intensity Flashing

Type B - High-Intensity Flashing
24 HR

Type C - Steady Burn


Type D - 360-degree Steady Burn Page 6-4



Chapter 6

Construction - Warning

Page 3 of 3C

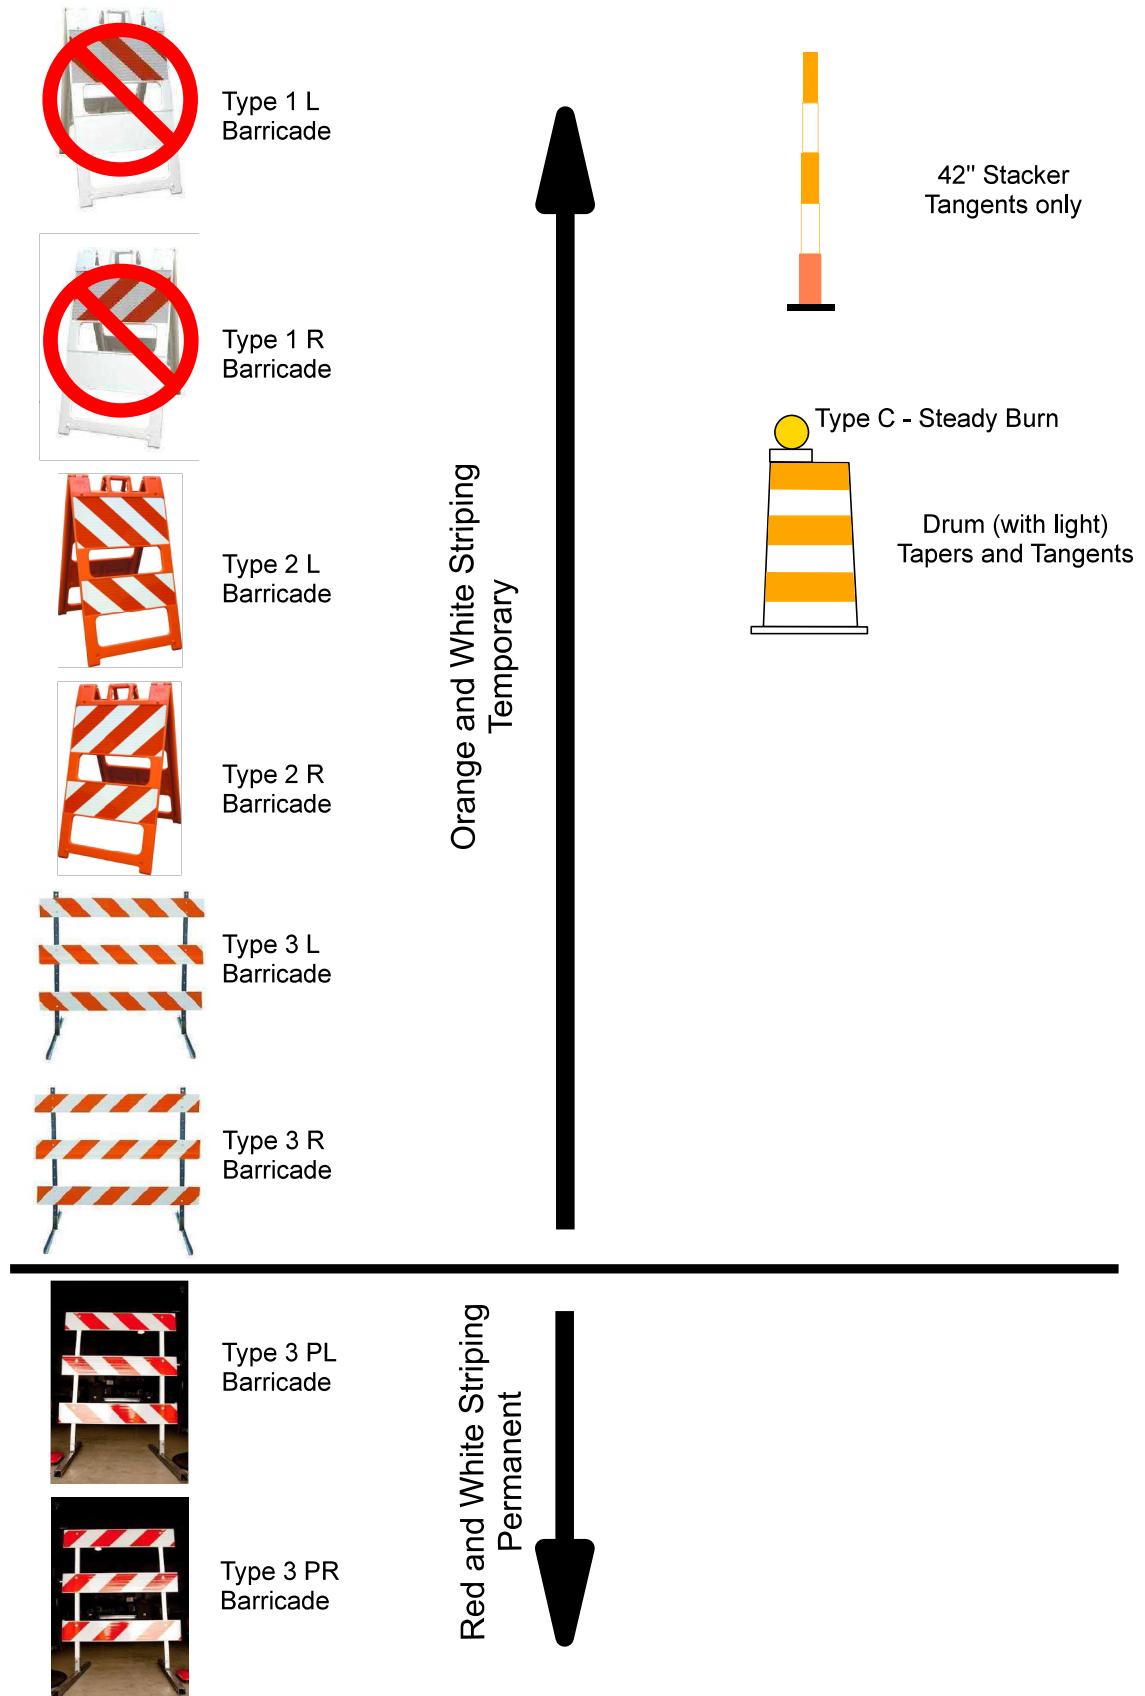

Page 6-5

Chapter 6

Table 6F-1. Temporary Traffic Control Zone Sign and Plaque Sizes (Sheet 1 of 3)

Sign or Plaque	Sign Designation	Section	Conventional Road	Freeway or Expressway	Minimum
Stop	R1-1	6F.06	30 x 30*	—	—
Stop (on Stop/Slow Paddle)	R1-1	6E.03	18 x 18	—	—
Yield	R1-2	6F.06	36 x 36 x 36*	—	30 x 30 x 30
To Oncoming Traffic (plaque)	R1-2aP	6F.06	36 x 30	48 x 36	24 x 18
Wait on Stop	R1-7	6E.05	24 x 30	24 x 30	—
Go on Slow	R1-8	6E.05	24 x 30	24 x 30	—
Speed Limit	R2-1	6F.12	24 x 30*	36 x 48	—
Fines Higher (plaque)	R2-6P	6F.12	24 x 18	36 x 24	—
Fines Double (plaque)	R2-6aP	6F.12	24 x 18	36 x 24	—
\$XX Fine (plaque)	R2-6bP	6F.12	24 x 18	36 x 24	—
Begin Higher Fines Zone	R2-10	6F.12	24 x 30	36 x 48	—
End Higher Fines Zone	R2-11	6F.12	24 x 30	36 x 48	—
End Work Zone Speed Limit	R2-12	6F.12	24 x 36	36 x 54	—
Movement Prohibition	R3-1,2,3,4,18,27	6F.06	24 x 24*	36 x 36	—
Mandatory Movement (1 lane)	R3-5	6F.06	30 x 36	—	—
Optional Movement (1 lane)	R3-6	6F.06	30 x 36	—	—
Mandatory Movement (text)	R3-7	6F.06	30 x 30*	—	—
Advance Intersection Lane Control	R3-8	6F.06	Varies x 30	—	—
Do Not Pass	R4-1	6F.06	24 x 30	36 x 48	—
Pass With Care	R4-2	6F.06	24 x 30	36 x 48	—
Keep Right	R4-7	6F.06	24 x 30	36 x 48	—
Narrow Keep Right	R4-7c	6F.06	18 x 30	—	—
Stay in Lane	R4-9	6F.11	24 x 30	36 x 48	—
Do Not Enter	R5-1	6F.06	30 x 30*	36 x 36	—
Wrong Way	R5-1a	6F.06	36 x 24*	42 x 30	—
One Way	R6-1	6F.06	36 x 12*	54 x 18	—
One Way	R6-2	6F.06	24 x 30*	36 x 48	—
No Parking (symbol)	R8-3	6F.06	24 x 24	36 x 36	—
Pedestrian Crosswalk	R9-8	6F.13	36 x 18	—	—
Sidewalk Closed	R9-9	6F.14	24 x 12	—	—
Sidewalk Closed, Use Other Side	R9-10	6F.14	24 x 12	—	—
Sidewalk Closed Ahead, Cross Here	R9-11	6F.14	24 x 18	—	—
Sidewalk Closed, Cross Here	R9-11a	6F.14	24 x 12	—	—
Road Closed	R11-2	6F.08	48 x 30	—	—
Road Closed - Local Traffic Only	R11-3a,3b,4	6F.09	60 x 30	—	—
Weight Limit	R12-1,2	6F.10	24 x 30	36 x 48	—
Weight Limit (with symbols)	R12-5	6F.10	24 x 36	36 x 48	—
Turn and Curve Signs	W1-1,2,3,4	6F.16	36 x 36	48 x 48	30 x 30
Reverse Curve (2 or more lanes)	W1-4b,4c	6F.48	36 x 36	48 x 48	30 x 30
One-Direction Large Arrow	W1-6	6F.16	48 x 24	60 x 30	—
Chevron	W1-8	6F.16	18 x 24	30 x 36	—
Stop Ahead	W3-1	6F.16	36 x 36	48 x 48	30 x 30
Yield Ahead	W3-2	6F.16	36 x 36	48 x 48	30 x 30
Signal Ahead	W3-3	6F.16	36 x 36	48 x 48	30 x 30
Be Prepared to Stop	W3-4	6F.16	36 x 36	48 x 48	30 x 30
Reduced Speed Limit Ahead	W3-5	6F.16	36 x 36	48 x 48	30 x 30



Chapter 6

Table 6F-1. Temporary Traffic Control Zone Sign and Plaque Sizes (Sheet 2 of 3)

Sign or Plaque	Sign Designation	Section	Conventional Road	Freeway or Expressway	Minimum
XX MPH Speed Zone Ahead	W3-5a	6F.16	36 x 36	48 x 48	30 x 30
Merging Traffic	W4-1,5	6F.16	36 x 36	48 x 48	36 x 36
Lane Ends	W4-2	6F.24	36 x 36	48 x 48	30 x 30
Added Lane	W4-3,6	6F.16	36 x 36	48 x 48	30 x 30
No Merge Area (plaque)	W4-5P	6F.16	18 x 24	24 x 30	—
Road Narrows	W5-1	6F.16	36 x 36	48 x 48	30 x 30
Narrow Bridge	W5-2	6F.16	36 x 36	48 x 48	30 x 30
One Lane Bridge	W5-3	6F.16	36 x 36	48 x 48	30 x 30
Ramp Narrows	W5-4	6F.26	36 x 36	48 x 48	30 x 30
Divided Highway	W6-1	6F.16	36 x 36	48 x 48	30 x 30
Divided Highway Ends	W6-2	6F.16	36 x 36	48 x 48	30 x 30
Two-Way Traffic	W6-3	6F.32	36 x 36	48 x 48	30 x 30
Two-Way Traffic	W6-4	6F.76	12 x 18	12 x 18	—
Hill (symbol)	W7-1	6F.16	36 x 36	48 x 48	30 x 30
Next XX Miles (plaque)	W7-3aP	6F.53	24 x 18	36 x 30	—
Bump	W8-1	6F.16	36 x 36	48 x 48	30 x 30
Dip	W8-2	6F.16	36 x 36	48 x 48	30 x 30
Pavement Ends	W8-3	6F.16	36 x 36	48 x 48	30 x 30
Soft Shoulder	W8-4	6F.44	36 x 36	48 x 48	30 x 30
Slippery When Wet	W8-5	6F.16	36 x 36	48 x 48	30 x 30
Truck Crossing	W8-6	6F.36	36 x 36	48 x 48	30 x 30
Loose Gravel	W8-7	6F.16	36 x 36	48 x 48	30 x 30
Rough Road	W8-8	6F.16	36 x 36	48 x 48	30 x 30
Low Shoulder	W8-9	6F.44	36 x 36	48 x 48	30 x 30
Uneven Lanes	W8-11	6F.45	36 x 36	48 x 48	30 x 30
No Center Line	W8-12	6F.47	36 x 36	48 x 48	30 x 30
Fallen Rocks	W8-14	6F.16	36 x 36	48 x 48	30 x 30
Grooved Pavement	W8-15	6F.16	36 x 36	48 x 48	30 x 30
Motorcycle (plaque)	W8-15P	6F.54	24 x 18	30 x 24	—
Shoulder Drop Off (symbol)	W8-17	6F.44	36 x 36	48 x 48	30 x 30
Shoulder Drop-Off (plaque)	W8-17P	6F.44	24 x 18	30 x 24	—
Road May Flood	W8-18	6F.16	36 x 36	48 x 48	24 x 24
No Shoulder	W8-23	6F.16	36 x 36	48 x 48	30 x 30
Steel Plate Ahead	W8-24	6F.46	36 x 36	48 x 48	30 x 30
Shoulder Ends	W8-25	6F.16	36 x 36	48 x 48	30 x 30
Lane Ends	W9-1,2	6F.16	36 x 36	48 x 48	30 x 30
Center Lane Closed Ahead	W9-3	6F.23	36 x 36	48 x 48	30 x 30
Grade Crossing Advance Warning	W10-1	6F.16	36 dia.	—	—
Truck	W11-10	6F.36	36 x 36	48 x 48	30 x 30
Double Arrow	W12-1	6F.16	30 x 30	—	—
Low Clearance	W12-2	6F.16	36 x 36	48 x 48	30 x 30
Advisory Speed (plaque)	W13-1P	6F.52	24 x 24	30 x 30	18 x 18
On Ramp (plaque)	W13-4P	6F.25	36 x 36	36 x 36	—
No Passing Zone (pennant)	W14-3	6F.16	48 x 48 x 36	64 x 64 x 48	40 x 40 x 30
XX Feet (plaque)	W16-2P	6F.16	24 x 18	30 x 24	—
Road Work (with distance)	W20-1	6F.18	36 x 36	48 x 48	30 x 30



Chapter 6

2009 Edition

Table 6F-1. Temporary Traffic Control Zone Sign and Plaque Sizes (Sheet 3 of 3)

Sign or Plaque	Sign Designation	Section	Conventional Road	Freeway or Expressway	Minimum
Detour (with distance)	W20-2	6F.19	36 x 36	48 x 48	30 x 30
Road (Street) Closed (with distance)	W20-3	6F.20	36 x 36	48 x 48	30 x 30
One Lane Road (with distance)	W20-4	6F.21	36 x 36	48 x 48	30 x 30
Lane(s) Closed (with distance)	W20-5,5a	6F.22	36 x 36	48 x 48	30 x 30
Flagger (symbol)	W20-7	6F.31	36 x 36	48 x 48	30 x 30
Flagger	W20-7a	6F.31	36 x 36	48 x 48	30 x 30
Slow (on Stop/Slow Paddle)	W20-8	6E.03	18 x 18	—	—
Workers	W21-1,1a	6F.33	36 x 36	48 x 48	30 x 30
Fresh Oil (Tar)	W21-2	6F.34	36 x 36	48 x 48	30 x 30
Road Machinery Ahead	W21-3	6F.35	36 x 36	48 x 48	30 x 30
Slow Moving Vehicle	W21-4	6G.06	36 x 18	—	—
Shoulder Work	W21-5	6F.37	36 x 36	48 x 48	30 x 30
Shoulder Closed	W21-5a	6F.37	36 x 36	48 x 48	30 x 30
Shoulder Closed (with distance)	W21-5b	6F.37	36 x 36	48 x 48	30 x 30
Survey Crew	W21-6	6F.38	36 x 36	48 x 48	30 x 30
Utility Work Ahead	W21-7	6F.39	36 x 36	48 x 48	30 x 30
Mowing Ahead	W21-8	6G.06	36 x 36	48 x 48	30 x 30
Blasting Zone Ahead	W22-1	6F.41	36 x 36	48 x 48	30 x 30
Turn Off 2-Way Radio and Cell Phone	W22-2	6F.42	42 x 36	42 x 36	—
End Blasting Zone	W22-3	6F.43	42 x 36	42 x 36	36 x 30
Slow Traffic Ahead	W23-1	6F.27	48 x 24	48 x 24	—
New Traffic Pattern Ahead	W23-2	6F.30	36 x 36	48 x 48	30 x 30
Double Reverse Curve (1 lane)	W24-1	6F.49	36 x 36	48 x 48	30 x 30
Double Reverse Curve (2 lanes)	W24-1a	6F.49	36 x 36	48 x 48	30 x 30
Double Reverse Curve (3 lanes)	W24-1b	6F.49	36 x 36	48 x 48	30 x 30
All Lanes	W24-1cP	6F.49	24 x 24	30 x 30	—
Road Work Next XX Miles	G20-1	6F.56	36 x 18	48 x 24	—
End Road Work	G20-2	6F.57	36 x 18	48 x 24	—
Pilot Car Follow Me	G20-4	6F.58	36 x 18	—	—
Work Zone (plaque)	G20-5aP	6F.12	24 x 18	36 x 24	—
Exit Open	E5-2	6F.28	48 x 36	48 x 36	—
Exit Closed	E5-2a	6F.28	48 x 36	48 x 36	—
Exit Only	E5-3	6F.29	48 x 36	48 x 36	—
Detour	M4-8	6F.59	24 x 12	30 x 15	—
End Detour	M4-8a	6F.59	24 x 18	24 x 18	—
End	M4-8b	6F.59	24 x 12	24 x 12	—
Detour	M4-9	6F.59	30 x 24	48 x 36	—
Bike/Pedestrian Detour	M4-9a	6F.59	30 x 24	—	—
Pedestrian Detour	M4-9b	6F.59	30 x 24	—	—
Bike Detour	M4-9c	6F.59	30 x 24	—	—
Detour	M4-10	6F.59	48 x 18	—	—

* See Table 2B-1 for minimum size required for signs facing traffic on multi-lane conventional roads

Notes: 1. Larger signs may be used wherever necessary for greater legibility or emphasis
 2. Dimensions are shown in inches and are shown as width x height



7 - Schools



Part 7 Schools



S1-1



W16-9P YG



W16-7PL YG



W16-7PR YG



S4-99P



S4-1P



S4-2P



S4-3P



S4-4P



S4-6P



S3-1



S4-5 15



S4-5 25

15
WHEN
FLASHING25
WHEN
FLASHING15
WHEN CHILDREN
ARE PRESENT25
WHEN CHILDREN
ARE PRESENT15
7:30 - 8:30 AM
2:30 - 3:30 PM25
7:30 - 8:30 AM
2:30 - 3:30 PM25
WHEN
FLASHINGEND
SCHOOL
ZONE

S5-1 15

S5-1 25

S5-1a 15

S5-1a 25

S5-1c 15

S5-1c 25

S5-1V

S5-2



R1-6



R1-6b



CHAPTER 7B. SIGNS**Section 7B.01 Size of School Signs****Standard:**

- 01 Except as provided in Section 2A.11, the sizes of signs and plaques to be used on conventional roadways in school areas shall be as shown in Table 7B-1.
- 02 The sizes in the Conventional Road column shall be used unless engineering judgment determines that a minimum or oversized sign size would be more appropriate.
- 03 The sizes in the Minimum column shall be used only where traffic volumes are low and speeds are 30 mph or lower, as determined by engineering judgment.
- 04 The sizes in the Oversized column shall be used on expressways.

Guidance:

- 05 The sizes in the Oversized column should be used on roadways that have four or more lanes with posted speed limits of 40 mph or higher.

Option:

- 06 The sizes in the Oversized column may also be used at other locations that require increased emphasis, improved recognition, or increased legibility.
- 07 Signs and plaques larger than those shown in Table 7B-1 may be used (see Section 2A.11).

Table 7B-1. School Area Sign and Plaque Sizes

Sign	Sign Designation	Section	Conventional Road	Minimum	Oversized
School	S1-1	7B.08	36 x 36	30 x 30	48 x 48
School Bus Stop Ahead	S3-1	7B.13	36 x 36	30 x 30	48 x 48
School Bus Turn Ahead	S3-2	7B.14	36 x 36	30 x 30	48 x 48
Reduced School Speed Limit Ahead	S4-5, S4-5a	7B.16	36 x 36	30 x 30	48 x 48
School Speed Limit XX When Flashing	S5-1	7B.15	24 x 48	—	36 x 72
End School Zone	S5-2	7B.09	24 x 30	—	36 x 48
End School Speed Limit	S5-3	7B.15	24 x 30	—	36 x 48
In-Street Ped Crossing	R1-6, R1-6a, R1-6b, R1-6c	7B.11, 7B.12	12 x 36	—	—
Speed Limit (School Use)	R2-1	7B.15	24 x 30	—	36 x 48
Begin Higher Fines Zone	R2-10	7B.10	24 x 30	—	36 x 48
End Higher Fines Zone	R2-11	7B.10	24 x 30	—	36 x 48


Plaque	Sign Designation	Section	Conventional Road	Minimum	Oversized
X:XX to X:XX AM X:XX to X:XX PM	S4-1P	7B.15	24 x 10	—	36 x 18
When Children Are Present	S4-2P	7B.15	24 x 10	—	36 x 18
School	S4-3P	7B.09, 7B.15	24 x 8	—	36 x 12
When Flashing	S4-4P	7B.15	24 x 10	—	36 x 18
Mon-Fri	S4-6P	7B.15	24 x 10	—	36 x 18
All Year	S4-7P	7B.09	24 x 12	—	30 x 18
Fines Higher	R2-6P	7B.10	24 x 18	—	36 x 24
XX Feet	W16-2P	7B.08	24 x 18	—	30 x 24
XX Ft	W16-2aP	7B.08	24 x 12	—	30 x 18
Turn Arrow	W16-5P	7B.08, 7B.09, 7B.11	24 x 12	—	30 x 18
Advance Turn Arrow	W16-6P	7B.08, 7B.09, 7B.11	24 x 12	—	30 x 18
Diagonal Arrow	W16-7P	7B.12	24 x 12	—	30 x 18
Diagonal Arrow (optional size)	W16-7P	7B.12	21 x 15	—	—
Ahead	W16-9P	7B.11	24 x 12	—	30 x 18

Note: 1. Larger sizes may be used when appropriate
2. Dimensions are shown in inches and are shown as width x height
3. Minimum sign sizes for multi-lane conventional roads shall be as shown in the Conventional Road column




Part 7 - Schools

Typical School Zone Layouts

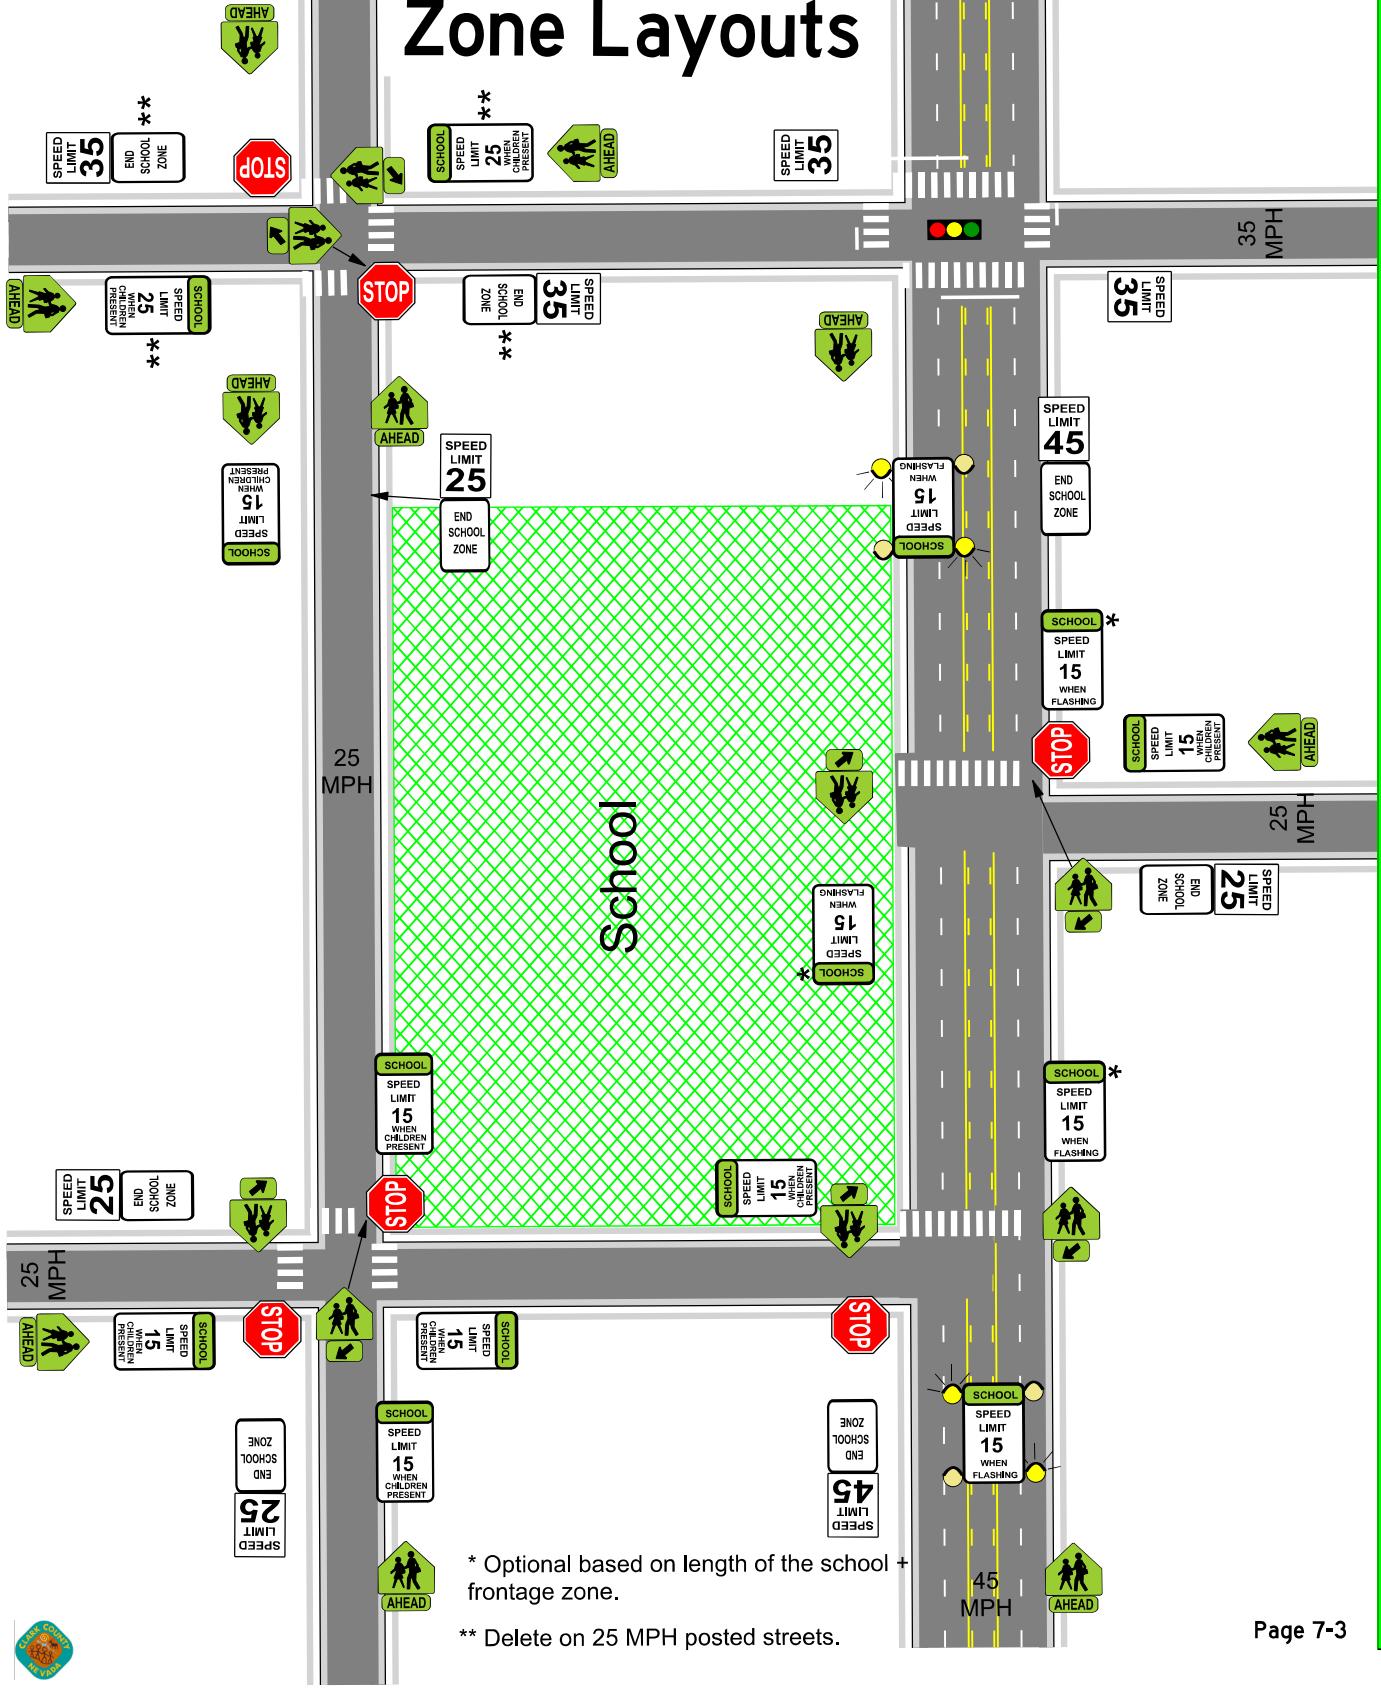


Part 7 - Schools

Internal Speed Zone signs with flashers

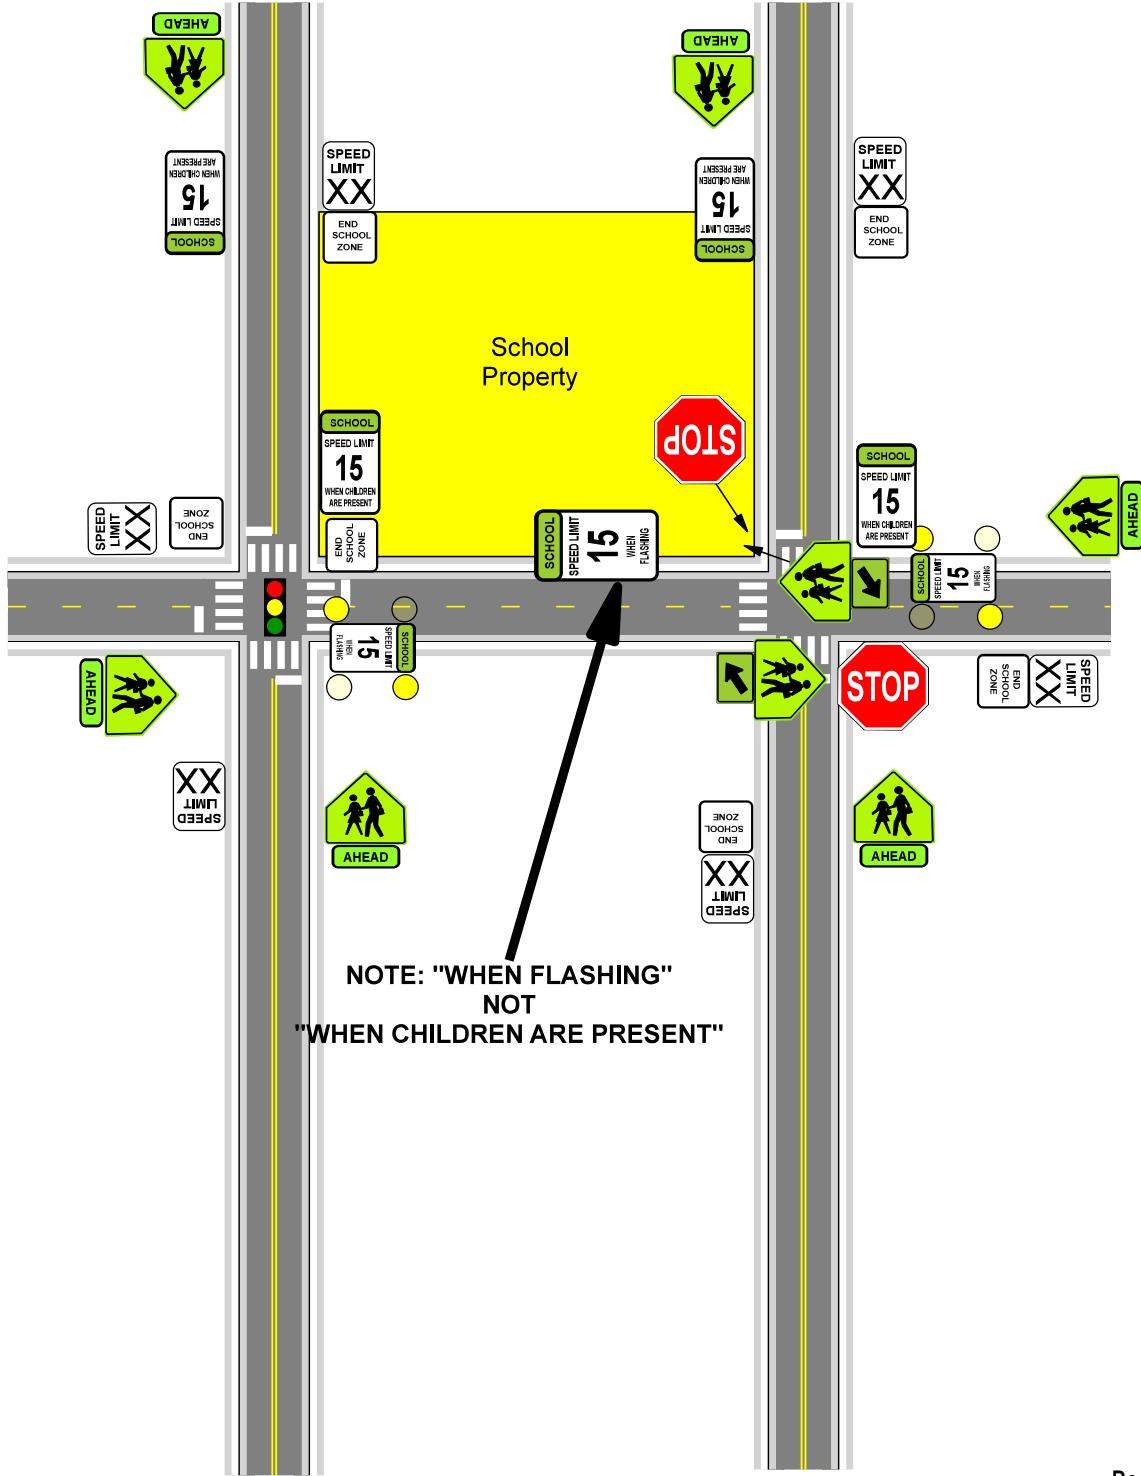


Part 7 - Schools

Internal Speed Zone signs with no flashers

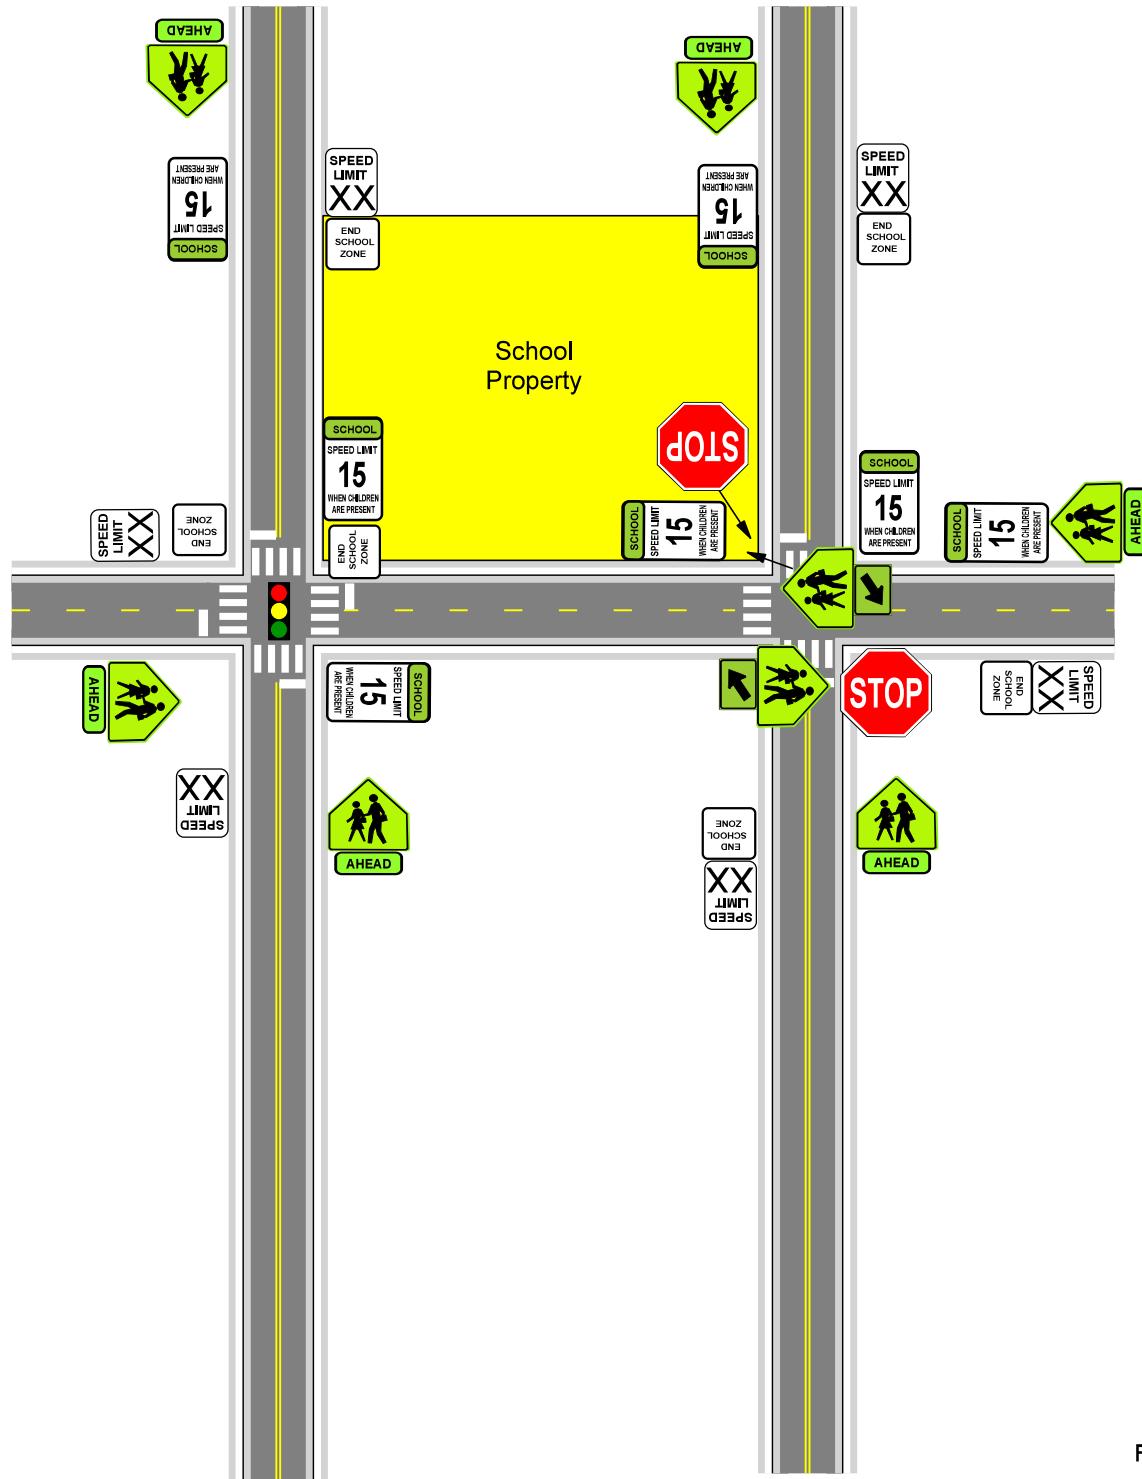


Part 7 - Schools

School Crossings on posted 25 MPH

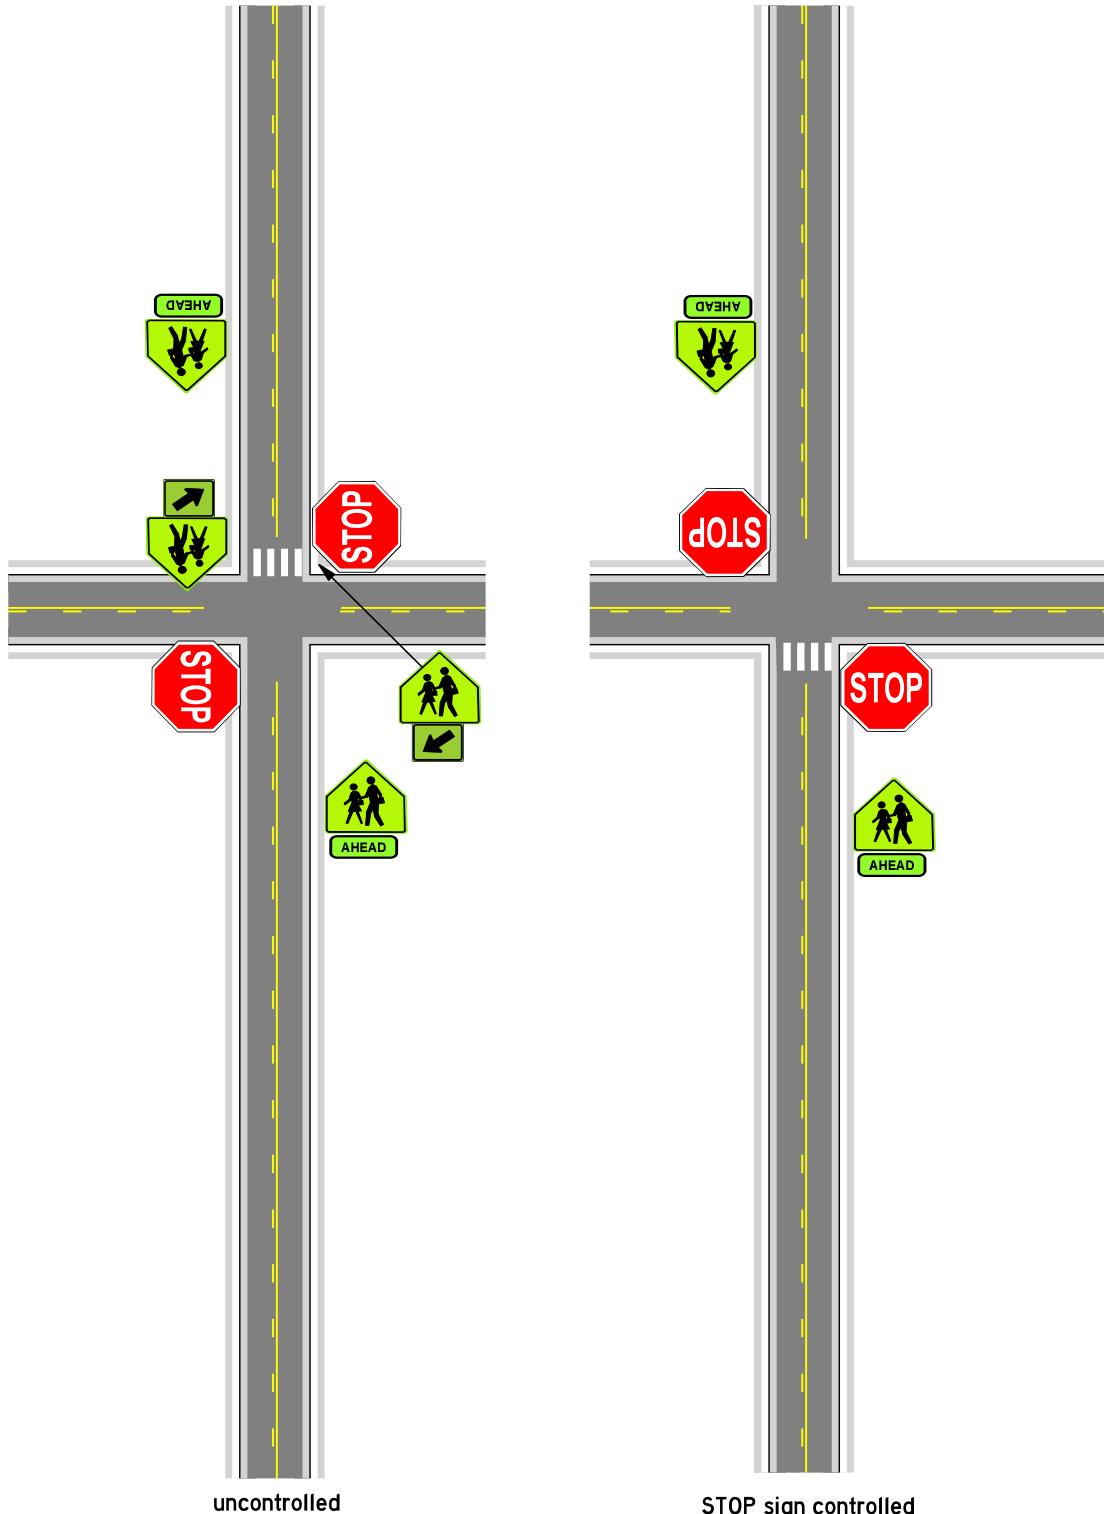


School Crossings on posted over 25 MPH

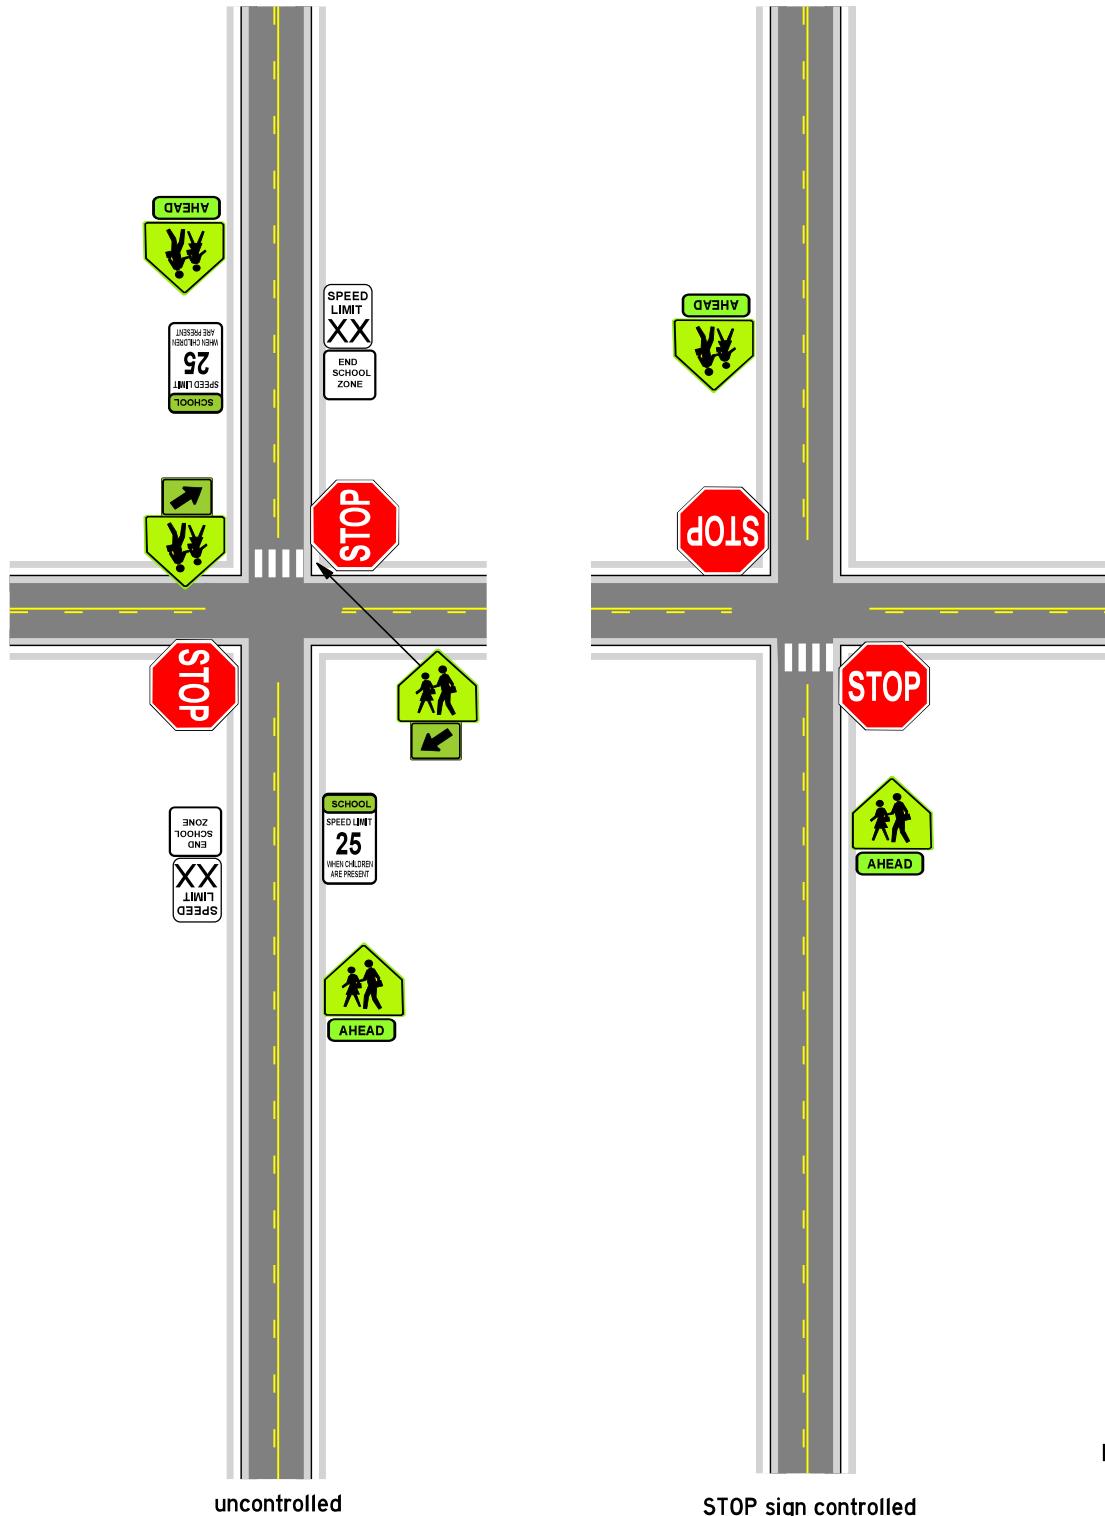


Part 7 - Schools

Typical SCHOOL, Reduced Speed, END SCHOOL ZONE layout

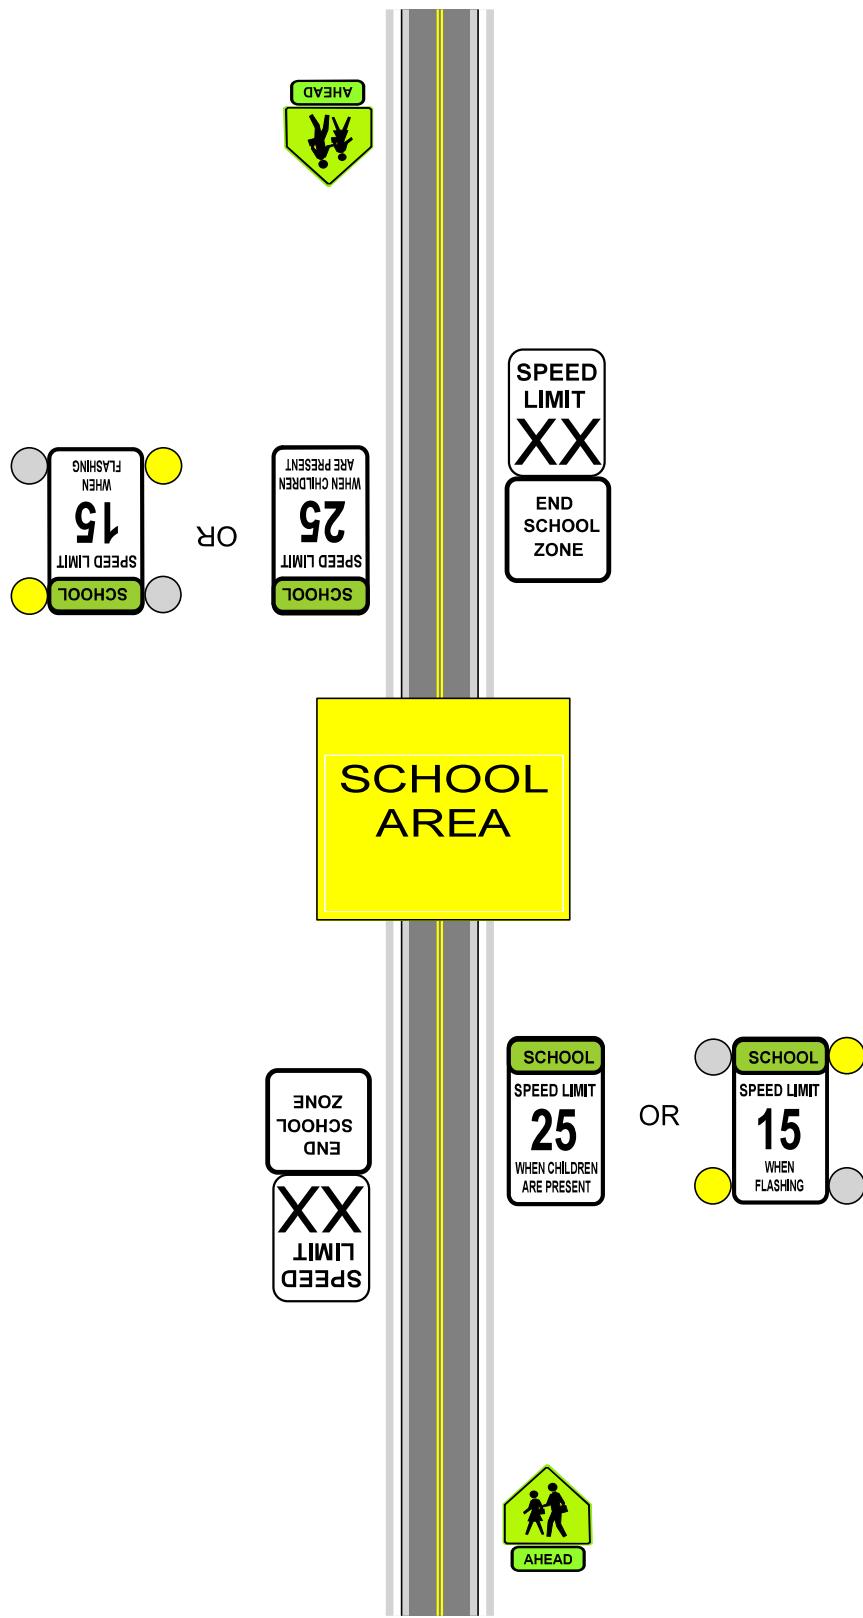


END SCHOOL ZONE sign order

Incorrect

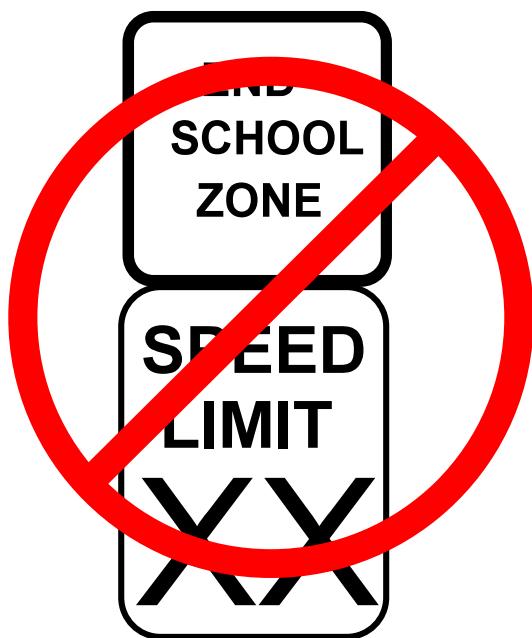

Correct

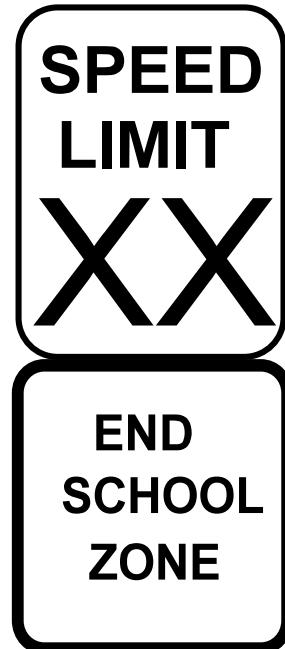

7B.15 A standard Speed Limit sign showing the speed limit for the section of highway that is downstream from the authorized and posted reduced school speed limit zone may be mounted on the same post above the END SCHOOL SPEED LIMIT (S5-3) sign or the END SCHOOL ZONE (S5-2) sign.



8 - Railroad and Light Rail



Part 8
Railroad and Light Rail

Page 1 of 1


	R1-1		R15-4a		W10-1		W10-12a
	R1-2		R15-4b		W10-1aP		W10-12b
	R3-1a		R15-4c		W10-2		W10-13P
	R3-2a		R15-5		W10-3		W10-14P
	R8-8		R15-5a		W10-4L		W10-14aP
	R8-9		R15-6		W10-4R		W10-15P
	R8-10L		R15-6a		I-13		
	R8-10R		R15-7				
	R8-10aL		R15-7a				
	R10-6L		R15-8				
	R10-6R						
	R10-6aL				W10-5P		
	R10-6aR				W10-8 (XX)		
	R15-1				W10-9		
	R15-2P (#)				W10-9P		
	R15-3				W10-11		
					W10-11a (XX)		
					W10-11b (XX)		



Table 8B-1. Grade Crossing Sign and Plaque Minimum Sizes

Sign or Plaque	Sign Designation	Section	Conventional Road		Expressway	Minimum	Oversized
			Single Lane	Multi-Lane			
Stop	R1-1	8B.04, 8B.05	30 x 30	36 x 36	36 x 36	—	48 x 48
Yield	R1-2	8B.04, 8B.05	36 x 36 x 36	48 x 48 x 48	48 x 48 x 48	30 x 30 x 30	—
No Right Turn Across Tracks	R3-1a	8B.08	24 x 30	30 x 36	—	—	—
No Left Turn Across Tracks	R3-2a	8B.08	24 x 30	30 x 36	—	—	—
Do Not Stop on Tracks	R8-8	8B.09	24 x 30	24 x 30	36 x 48	—	36 x 48
Tracks Out of Service	R8-9	8B.10	24 x 24	24 x 24	36 x 36	—	36 x 36
Stop Here When Flashing	R8-10	8B.11	24 x 36	24 x 36	—	—	36 x 48
Stop Here When Flashing	R8-10a	8B.11	24 x 30	24 x 30	—	—	36 x 42
Stop Here on Red	R10-6	8B.12	24 x 36	24 x 36	—	—	36 x 48
Stop Here on Red	R10-6a	8B.12	24 x 30	24 x 30	—	—	36 x 42
Grade Crossing (Crossbuck)	R15-1	8B.03	48 x 9	48 x 9	—	—	—
Number of Tracks (plaque)	R15-2P	8B.03	27 x 18	27 x 18	—	—	—
Exempt (plaque)	R15-3P	8B.07	24 x 12	24 x 12	—	—	—
Light Rail Only Right Lane	R15-4a	8B.13	24 x 30	24 x 30	—	—	—
Light Rail Only Left Lane	R15-4b	8B.13	24 x 30	24 x 30	—	—	—
Light Rail Only Center Lane	R15-4c	8B.13	24 x 30	24 x 30	—	—	—
Light Rail Do Not Pass	R15-5	8B.14	24 x 30	24 x 30	—	—	—
Do Not Pass Stopped Train	R15-5a	8B.14	24 x 30	24 x 30	—	—	—
No Motor Vehicles On Tracks Symbol	R15-6	8B.15	24 x 24	24 x 24	—	—	—
Do Not Drive On Tracks	R15-6a	8B.15	24 x 30	24 x 30	—	—	—
Light Rail Divided Highway Symbol	R15-7	8B.16	24 x 24	24 x 24	—	—	—
Light Rail Divided Highway Symbol (T-Intersection)	R15-7a	8B.16	24 x 24	24 x 24	—	—	—
Look	R15-8	8B.17	36 x 18	36 x 18	—	—	—
Grade Crossing Advance Warning	W10-1	8B.06	36 Dia.	36 Dia.	48 Dia.	—	48 Dia.
Exempt (plaque)	W10-1aP	8B.07	24 x 12	24 x 12	—	—	—
Grade Crossing and Intersection Advance Warning	W10-2,3,4	8B.06	36 x 36	36 x 36	48 x 48	—	48 x 48
Low Ground Clearance	W10-5	8B.23	36 x 36	36 x 36	48 x 48	—	48 x 48
Low Ground Clearance (plaque)	W10-5P	8B.23	30 x 24	30 x 24	—	—	—
Light Rail Activated Blank-Out Symbol	W10-7	8B.19	24 x 24	24 x 24	—	—	—
Trains May Exceed 80 MPH	W10-8	8B.20	36 x 36	36 x 36	48 x 48	—	48 x 48
No Train Horn	W10-9	8B.21	36 x 36	36 x 36	48 x 48	—	48 x 48
No Train Horn (plaque)	W10-9P	8B.21	30 x 24	30 x 24	—	—	—
Storage Space Symbol	W10-11	8B.24	36 x 36	36 x 36	48 x 48	—	48 x 48
Storage Space XX Feet Between Tracks & Highway	W10-11a	8B.24	30 x 36	30 x 36	—	—	—
Storage Space XX Feet Between Highway & Tracks Behind You	W10-11b	8B.24	30 x 36	30 x 36	—	—	—
Skewed Crossing	W10-12	8B.25	36 x 36	36 x 36	48 x 48	—	48 x 48
No Gates or Lights (plaque)	W10-13P	8B.22	30 x 24	30 x 24	—	—	—
Next Crossing (plaque)	W10-14P	8B.23	30 x 24	30 x 24	—	—	—
Use Next Crossing (plaque)	W10-14aP	8B.23	30 x 24	30 x 24	—	—	—
Rough Crossing (plaque)	W10-15P	8B.23	30 x 24	30 x 24	—	—	36 x 30

Notes: 1. Larger signs may be used when appropriate
 2. Dimensions in Inches are shown as width x height
 3. Table 9B-1 shows the minimum sizes that may be used for grade crossing signs and plaques that face shared-use paths and pedestrian facilities



9 - Bike Facilities



Part 9
Bike Facilities

Page 1 of 2

	R1-1		R9-7		W5-2		D4-3L (R if arrow to right)
	R1-2		R3-17		W5-4a		D11-1
	R3-17aP*		R3-17bP*		W7-5		D11-1a
	R4-1		R9-99		W8-10		D11-1b
	R4-2		R10-4L		W8-10P**		D11-1c
	R4-3		R10-4R		W10-12a		D11-2
	R4-4		R10-22		W10-12b		D11-3
	R4-7		R10-24		W11-1		D11-4
	R4-16		R10-25		W11-2L		D1-1bL (R if arrow to right)
	R5-1b		R10-26L		W11-2R		D1-1cR (L if arrow to left)
	R9-3cP		R10-26R		W11-15		D1-2b
	R5-3				W11-15P		D1-2c
	R5-6				W16-1		D1-3b
	R7-9				W16-1P***		D1-3c
	R7-9a						
	R9-3						
	R9-5						
	R9-6						

* to be mounted below R3-17

** to be mounted below W8-10

*** to be mounted below W16-1

Page 9-1



Part 9
Bike Facilities

Page 2 of 2

JCT	M2-1 G		M5-1L G
NORTH	M3-1 G		M5-1R G
EAST	M3-2 G		M5-2L G
SOUTH	M3-3 G		M5-2R G
WEST	M3-4 G		M5-3 G
ALTERNATE	M4-1 G		M6-1 G
ALT	M4-1a G		M6-2L G
BY-PASS	M4-2 G		M6-2R G
TO	M4-5 G		M6-3 G
END	M4-6 G		M6-4 G
TEMPORARY	M4-7 G		M6-5L G
TEMP	M4-7a G		M6-5R G
BEGIN	M4-14 G		M6-6L G
			M6-6R G
			M6-7L G
			M6-7R G



Page 9-2

Table 9B-1. Bicycle Facility Sign and Plaque Minimum Sizes (Sheet 1 of 2)

Sign or Plaque	Sign Designation	Section	Shared-Use Path	Roadway
Stop	R1-1	2B.05, 9B.03	18 x 18	30 x 30
Yield	R1-2	2B.08, 9B.03	18 x 18 x 18	30 x 30 x 30
Bike Lane	R3-17	9B.04	—	24 x 18
Bike Lane (plaques)	R3-17aP, R3-17bP	9B.04	—	24 x 8
Movement Restriction	R4-1,2,3,7,16	2B.28,29,30,32; 9B.14	12 x 18	18 x 24
Begin Right Turn Lane Yield to Bikes	R4-4	9B.05	—	36 x 30
Bicycles May Use Full Lane	R4-11	9B.06	—	30 x 30
Bicycle Wrong Way	R5-1b	9B.07	12 x 18	12 x 18
No Motor Vehicles	R5-3	9B.08	24 x 24	24 x 24
No Bicycles	R5-6	9B.09	18 x 18	24 x 24
No Parking Bike Lane	R7-9,9a	9B.10	—	12 x 18
No Pedestrians	R9-3	9B.09	18 x 18	18 x 18
Ride With Traffic (plaque)	R9-3cP	9B.07	12 x 12	12 x 12
Bicycle Regulatory	R9-5,6	9B.11	12 x 18	12 x 18
Shared-Use Path Restriction	R9-7	9B.12	12 x 18	—
No Skaters	R9-13	9B.09	18 x 18	18 x 18
No Equestrians	R9-14	9B.09	18 x 18	18 x 18
Push Button for Green Light	R10-4	9B.11	9 x 12	9 x 12
To Request Green Wait on Symbol	R10-22	9B.13	12 x 18	12 x 18
Bike Push Button for Green Light	R10-24	9B.11	9 x 15	9 x 15
Push Button to Turn On Warning Lights	R10-25	9B.11	9 x 12	9 x 12
Bike Push Button for Green Light (arrow)	R10-26	9B.11	9 x 15	9 x 15
Grade Crossing (Crossbuck)	R15-1	8B.03, 9B.14	24 x 4.5	48 x 9
Number of Tracks (plaque)	R15-2P	8B.03, 9B.14	13.5 x 9	27 x 18
Look	R15-8	8B.17, 9B.14	18 x 9	36 x 18
Turn and Curve Warning	W1-1,2,3,4,5	2C.04, 9B.15	18 x 18	24 x 24
Arrow Warning	W1-6,7	2C.12, 2C.47, 9B.15	24 x 12	36 x 18
Intersection Warning	W2-1,2,3,4,5	2C.46, 9B.16	18 x 18	24 x 24
Stop,Yield, Signal Ahead	W3-1,2,3	2C.36, 9B.19	18 x 18	30 x 30
Narrow Bridge	W5-2	2C.20, 9B.19	18 x 18	30 x 30
Path Narrows	W5-4a	9B.19	18 x 18	—
Hill	W7-5	9B.19	18 x 18	30 x 30
Bump or Dip	W8-1,2	2C.28, 9B.17	18 x 18	24 x 24
Pavement Ends	W8-3	2C.30, 9B.17	18 x 18	30 x 30
Bicycle Surface Condition	W8-10	9B.17	18 x 18	30 x 30
Slippery When Wet (plaque)	W8-10P	9B.17	12 x 9	12 x 9
Grade Crossing Advance Warning	W10-1	8B.06, 9B.19	24 Dia.	36 Dia.
No Train Horn (plaque)	W10-9P	8B.21, 9B.19	18 x 12	30 x 24
Skewed Crossing	W10-12	8B.25, 9B.19	18 x 18	36 x 36
Bicycle Warning	W11-1	9B.18	18 x 18	24 x 24
Pedestrian Crossing	W11-2	2C.50, 9B.19	18 x 18	24 x 24
Combination Bike and Ped Crossing	W11-15	9B.18	18 x 18	30 x 30
Trail Crossing (plaque)	W11-15P	9B.18	18 x 12	24 x 18
Low Clearance	W12-2	2C.27, 9B.19	18 x 18	30 x 30
Playground	W15-1	2C.51, 9B.19	18 x 18	24 x 24
Share the Road (plaque)	W16-1P	2C.60, 9B.19	—	18 x 24



Table 9B-1. Bicycle Facility Sign and Plaque Minimum Sizes (Sheet 2 of 2)

Sign or Plaque	Sign Designation	Section	Shared-Use Path	Roadway
XX Feet (plaque)	W16-2P	2C.55, 9B.18	18 x 12	24 x 18
XX Ft (plaque)	W16-2aP	2C.55, 9B.18	18 x 9	24 x 12
Diagonal Arrow (plaque)	W16-7P	9B.18	—	24 x 12
Ahead (plaque)	W16-9P	9B.18	—	24 x 12
Destination (1 line)	D1-1, D1-1a	2D.37, 9B.20	varies x 6	varies x 18
Bicycle Destination (1 line)	D1-1b, D1-1c	9B.20	varies x 6	varies x 6
Destination (2 lines)	D1-2, D1-2a	2D.37, 9B.20	varies x 12	varies x 30
Bicycle Destination (2 lines)	D1-2b, D1-2c	9B.20	varies x 12	varies x 12
Destination (3 lines)	D1-3, D1-3a	2D.37, 9B.20	varies x 18	varies x 42
Bicycle Destination (3 lines)	D1-3b, D1-3c	9B.20	varies x 18	varies x 18
Street Name	D3-1	2D.43, 9B.20	varies x 6	varies x 8
Bicycle Parking Area	D4-3	9B.23	12 x 18	12 x 18
Reference Location (1-digit)	D10-1	2H.02, 9B.24	6 x 12	10 x 18
Intermediate Reference Location (1-digit)	D10-1a	2H.02, 9B.24	6 x 18	10 x 27
Reference Location (2-digit)	D10-2	2H.02, 9B.24	6 x 18	10 x 27
Intermediate Reference Location (2-digit)	D10-2a	2H.02, 9B.24	6 x 24	10 x 36
Reference Location (3-digit)	D10-3	2H.02, 9B.24	6 x 24	10 x 36
Intermediate Reference Location (3-digit)	D10-3a	2H.02, 9B.24	6 x 30	10 x 48
Bike Route	D11-1, D11-1c	9B.20	24 x 18	24 x 18
Bicycles Permitted	D11-1a	9B.25	18 x 18	—
Bike Route (plaque)	D11-1bP	9B.25	18 x 6	—
Pedestrians Permitted	D11-2	9B.25	18 x 18	—
Skaters Permitted	D11-3	9B.25	18 x 18	—
Equestrians Permitted	D11-4	9B.25	18 x 18	—
Bicycle Route	M1-8, M1-8a	9B.21	12 x 18	18 x 24
U.S. Bicycle Route	M1-9	9B.21	12 x 18	18 x 24
Bicycle Route Auxiliary Signs	M2-1; M3-1,2,3,4; M4-1,1a,2,3,5,6,7,7a,8,14	9B.22	12 x 6	12 x 6
Bicycle Route Arrow Signs	M5-1,2; M6-1,2,3,4,5,6,7	9B.22	12 x 9	12 x 9
Type 3 Object Markers	OM3-L,C,R	2C.63, 9B.26	6 x 18	12 x 36

Notes:

1. Larger signs may be used when appropriate
2. Dimensions are shown in inches and are shown as width x height

Guidance:

04 Except for size, the design of signs and plaques for bicycle facilities should be identical to that provided in this Manual for signs and plaques for streets and highways.

Support:

05 Uniformity in design of bicycle signs and plaques includes shape, color, symbols, arrows, wording, lettering, and illumination or retroreflectorization.

Section 9B.03 STOP and YIELD Signs (R1-1, R1-2)

Standard:

01 STOP (R1-1) signs (see Figure 9B-2) shall be installed on shared-use paths at points where bicyclists are required to stop.

02 YIELD (R1-2) signs (see Figure 9B-2) shall be installed on shared-use paths at points where bicyclists have an adequate view of conflicting traffic as they approach the sign, and where bicyclists are required to yield the right-of-way to that conflicting traffic.



Clark County Signs

Trails



Clark County Trail Signs

Page 1 of 1



CCTR1-1



CCTR1-2



CCTR1-3



CCTR2-1



M4-5 B



M4-6 B



M4-7 B



M4-14 B



M5-1L B



M5-1R B



M5-2L B



M5-2R B



M5-3 B



M6-1 B



M6-2L B



M6-2R B



M6-3 B



Page 11-1

Clark County Signs

Non-Roadway



Clark County Non-Roadway Signs

Page 1 of 1

	CCC1-1		CCL3-1		CCNW1-1
	CCC1-2		CCL3-2		CCR10-1
	CCF1-1		CCL4-1		RTC1-1
	CCF1-2		CCL9-1		CCL5-1
	CCHD1-1		CCL9-2		
	CCHD1-2		CCL10-1		
	CCL1-1		CCL11-1		
	CCL1-2		CCL12-1		
			CCL13-1		



Clark County Signs



**Replace when
Found**



REPLACE WHEN FOUND

Page 1 of 1

Replace with	
	NMI-5 B
	R2-1 15
	R2-1 20
	NMS1-1
	NMS2-1
	NMW4-2R
	NMW4-2L
	NMW4-4xP
	NMW4-4zP
	NMW8-3a
	NMW11-2
	NMW11-2a
	NMW8-93
	I-5
	R2-1 25
	R2-1 25
	S1-1
	S1-1
	W4-2R
	W4-2L
	W4-4P
	W4-4P
	W8-3
	W11-2
	W11-2
	W14-2

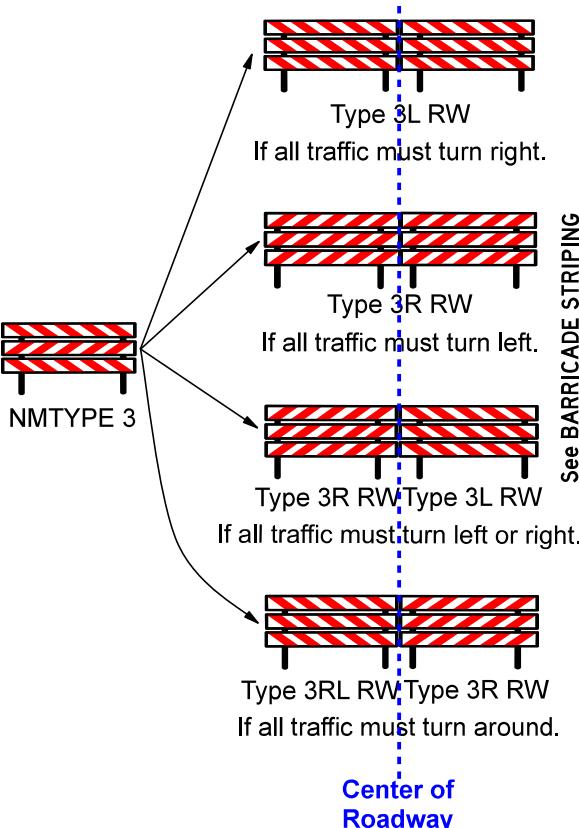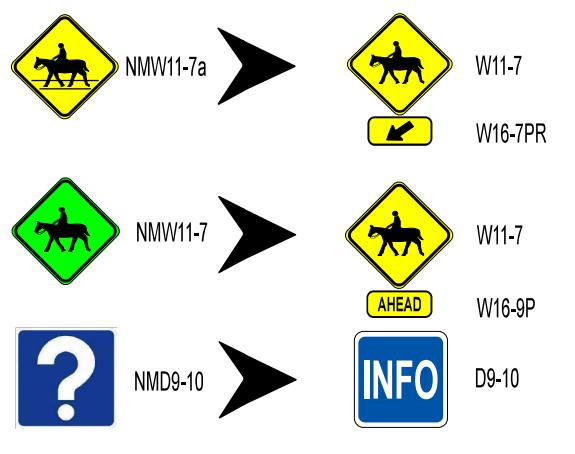

Clark County Signs

Replace Warning



Incorrect Turn Warning Signs

	NMW1-2aL 15		W1-1aL 15		NMW1-2aR 15		W1-1aR 15
	NMW1-2aL 20		W1-1aL 20		NMW1-2aR 20		W1-1aR 20
	NMW1-2aL 25		W1-1aL 25		NMW1-2aR 25		W1-1aR 25
	NMW1-2aL 30		W1-1aL 30		NMW1-2aR 30		W1-1aR 30
	NMW1-4aL 15		W1-3L		NMW1-4aR 15		W1-3R
			W13-1P 15				W13-1P 15
	NMW1-4aL 20		W1-3L		NMW1-4aR 20		W1-3R
			W13-1P 20				W13-1P 20
	NMW1-4aL 25		W1-3L		NMW1-4aR 25		W1-3R
			W13-1P 25				W13-1P 25
	NMW1-4aL 30		W1-3L		NMW1-4aR 30		W1-3R
			W13-1P 15				W13-1P 15



Clark County Signs

**Remove and
Not To Be Used**



Remove and Not To Be Used



NM1-1



XR7-200M L



XR7-97

Remove - Not supported by code or law.



NM1-2



XR7-200M R



R7-4L

Remove - Not supported by code or law.



Replace with R7-1a

R7-4



NM1-3



XR7-201aP



XR7-201r



XR7-201b

Remove - Not supported by code or law.



R7-4R



NM1-4



NM2-1



XR7-1v

Remove - Not supported by code or law.



NM2-2



XR7-6

Remove - Not supported by code or law.



R14-4



XR7-5

Remove - Not supported by code or law.



R14-5



XGA-S1



XI-8P

Remove - Not supported by code or law.



XR7-2

Remove - Not supported by code or law.



XR7-107V

Remove - Not supported by code or law.



XR7-108

or with L or R arrow

Remove - Not supported by code or law.



Clark County Signs

**Upgrade when
Replaced**



Upgrade when Replaced

Page 1 of 1

	NMR3-8z	➤		RNV2-10		XR7-9	➤		R7-9a
	NMR3-8y	➤		RNV2-10		XR8-1	➤		R8-3
	RNV1-1	➤		RNV2-10		XR8-2	➤		R8-3
	RNV1-2	➤		RNV2-11		XR8-3a	➤		R8-3
	XR7-1	➤		R7-1a					
	XR7-1L	➤		R7-1aL					
	XR7-1R	➤		R7-1aR					
	R7-4	➤		R7-1a					
	R7-4L	➤		R7-1aL					
	R7-4R	➤		R7-1aR					
	XR7-7	➤		R7-107a					
	XR7-7L	➤		R7-107aL					
	XR7-7R	➤		R7-107aR					



Clark County Signs

Las Vegas Strip ONLY



Clark County - Las Vegas Strip

Page 1 of 2



CCL2-1



CCL2-1a



CCL2-2



CCL2-3



CCL2-4



CCL2-5



CCL2-6



CCL2-7



CCL2-8Pk L



CCL2-8Pn L



CCL2-8Pq L



CCL2-8Pk R



CCL2-8Pn R



CCL2-8Pq R



R7-99L



R7-99R



R7-99T



CCL16-1



CCL15-2



CCM1-1



CCN1-1



Page 17-1

Clark County - Las Vegas Strip

Page 2 of 2

WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY HOLIDAY WEEKENDS 12:00 PM - 12:30 AM FRIDAY THRU MONDAY START	CCL2-8Pa B	WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY HOLIDAY WEEKENDS 12:00 PM - 12:30 AM FRIDAY THRU MONDAY	CCL2-8Pa C	WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY HOLIDAY WEEKENDS 12:00 PM - 12:30 AM FRIDAY THRU MONDAY END	CCL2-8Pa E
DAILY 10:30 AM - 2:30 AM START	CCL2-8Pb B	DAILY 10:30 AM - 2:30 AM	CCL2-8Pb C	DAILY 10:30 AM - 2:30 AM END	CCL2-8Pb E
DAILY 10:30 AM - 3:00 AM START	CCL2-8Pc B	DAILY 10:30 AM - 3:00 AM	CCL2-8Pc C	DAILY 10:30 AM - 3:00 AM END	CCL2-8Pc E
DAILY 11:30 AM - 1:00 PM START	CCL2-8Pd B	DAILY 11:30 AM - 1:00 PM	CCL2-8Pd C	DAILY 11:30 AM - 1:00 PM END	CCL2-8Pd E
DAILY 5:30 PM - 2:00 PM START	CCL2-8Pe B	DAILY 5:30 PM - 2:00 PM	CCL2-8Pe C	DAILY 5:30 PM - 2:00 PM END	CCL2-8Pe E
DAILY 8:00 PM - 12:30 AM HOLIDAY WEEKENDS 12:00 PM - 12:30 AM FRIDAY THRU MONDAY START	CCL2-8Pf B	DAILY 8:00 PM - 12:30 AM HOLIDAY WEEKENDS 12:00 PM - 12:30 AM FRIDAY THRU MONDAY	CCL2-8Pf C	DAILY 8:00 PM - 12:30 AM HOLIDAY WEEKENDS 12:00 PM - 12:30 AM FRIDAY THRU MONDAY END	CCL2-8Pf E
DAILY 8:00 PM - 1:00 AM HOLIDAY WEEKENDS 1:00 PM - 1:00 AM FRIDAY THRU SUNDAY START	CCL2-8Pg B	DAILY 8:00 PM - 1:00 AM HOLIDAY WEEKENDS 1:00 PM - 1:00 AM FRIDAY THRU SUNDAY	CCL2-8Pg C	DAILY 8:00 PM - 1:00 AM HOLIDAY WEEKENDS 1:00 PM - 1:00 AM FRIDAY THRU SUNDAY END	CCL2-8Pg E
HOLIDAY WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY START	CCL2-8Ph B	HOLIDAY WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY	CCL2-8Ph C	HOLIDAY WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY END	CCL2-8Ph E
WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY START	CCL2-8Pj B	WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY	CCL2-8Pj C	WEEKENDS 2:00 PM - 12:30 AM FRIDAY THRU SUNDAY END	CCL2-8Pj E
HOLIDAY WEEKENDS 3:00 PM - 11:30 PM FRIDAY THRU SUNDAY START	CCL2-8Pk B	HOLIDAY WEEKENDS 3:00 PM - 11:30 PM FRIDAY THRU SUNDAY	CCL2-8Pk C	HOLIDAY WEEKENDS 3:00 PM - 11:30 PM FRIDAY THRU SUNDAY END	CCL2-8Pk E
HOLIDAY WEEKENDS 3:00 PM - 12:00 AM FRIDAY THRU SUNDAY START	CCL2-8Pm B	HOLIDAY WEEKENDS 3:00 PM - 12:00 AM FRIDAY THRU SUNDAY	CCL2-8Pm C	HOLIDAY WEEKENDS 3:00 PM - 12:00 AM FRIDAY THRU SUNDAY END	CCL2-8Pm E
HOLIDAY WEEKENDS 7:00 PM - 12:30 AM FRIDAY THRU SUNDAY START	CCL2-8Pn B	HOLIDAY WEEKENDS 7:00 PM - 12:30 AM FRIDAY THRU SUNDAY	CCL2-8Pn C	HOLIDAY WEEKENDS 7:00 PM - 12:30 AM FRIDAY THRU SUNDAY END	CCL2-8Pn E
HOLIDAY WEEKENDS 7:00 PM - 12:30 AM FRIDAY THRU MONDAY START	CCL2-8Pp B	HOLIDAY WEEKENDS 7:00 PM - 12:30 AM FRIDAY THRU MONDAY	CCL2-8Pp C	HOLIDAY WEEKENDS 7:00 PM - 12:30 AM FRIDAY THRU MONDAY END	CCL2-8Pp E
HOLIDAY WEEKENDS 1:00 PM - 12:00 AM SATURDAY THRU SUNDAY START	CCL2-8Pq B	HOLIDAY WEEKENDS 1:00 PM - 12:00 AM SATURDAY THRU SUNDAY	CCL2-8Pq C	HOLIDAY WEEKENDS 1:00 PM - 12:00 AM SATURDAY THRU SUNDAY END	CCL2-8Pq E




Sign Post Requirements




BLANK STANDARDS

(ENGLISH)

Single Post

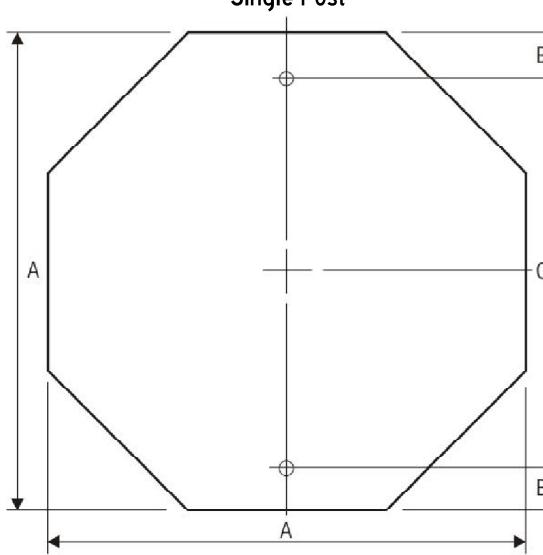

Double Post

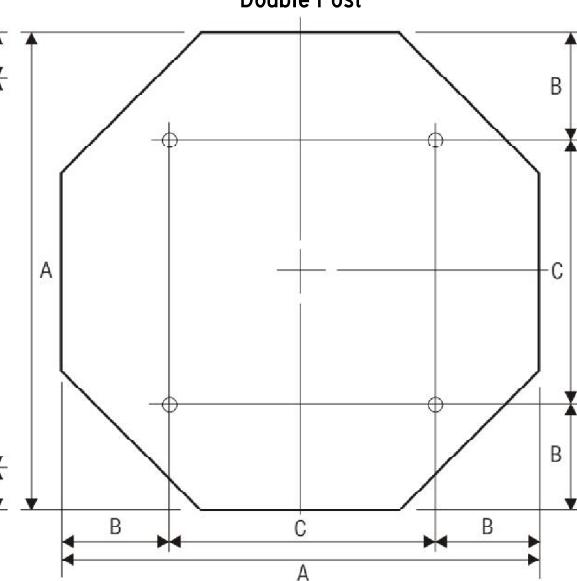


OCTAGON

A	B	C
24	3	18
30	3	24
36	3	30

A	B	C
48	9	30

Or larger

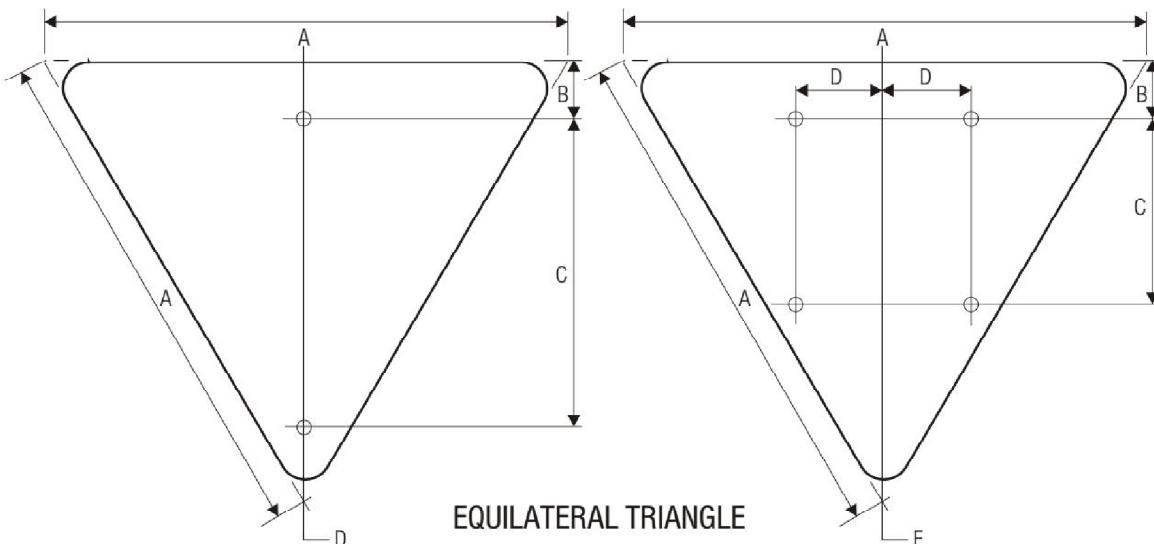

EQUILATERAL TRIANGLE

A	B	C	D
30	3	18	1.5
36	3	21	2


A	B	C	D	E
48	3	12	12	3
60	3	18	15	4

Or larger




VERTICAL RECTANGLE

Single Post

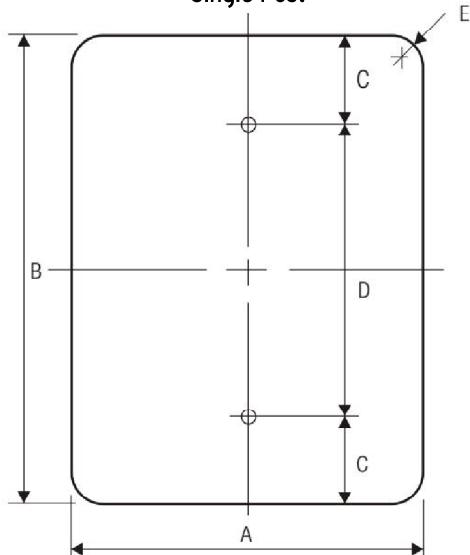



Double Post

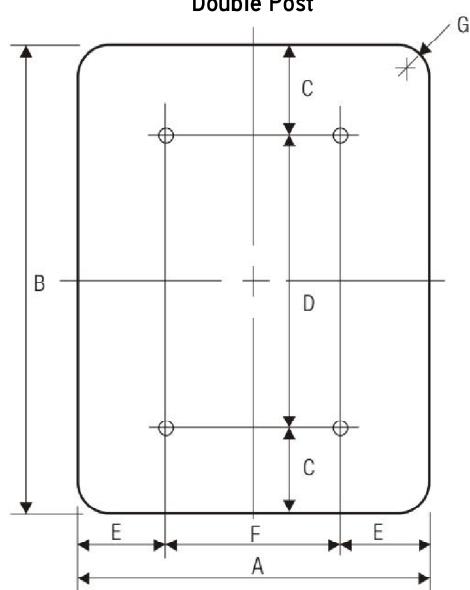

A	B	C	D	E
12	18	1.5	15	1.5
18	24	3	18	1.5
24	30	3	24	1.5
30	36	3	30	1.875

A	B	C	D	E	F	G
36	48	6	36	6	24	2.25
48	60	6	48	9	30	3


SQUARE

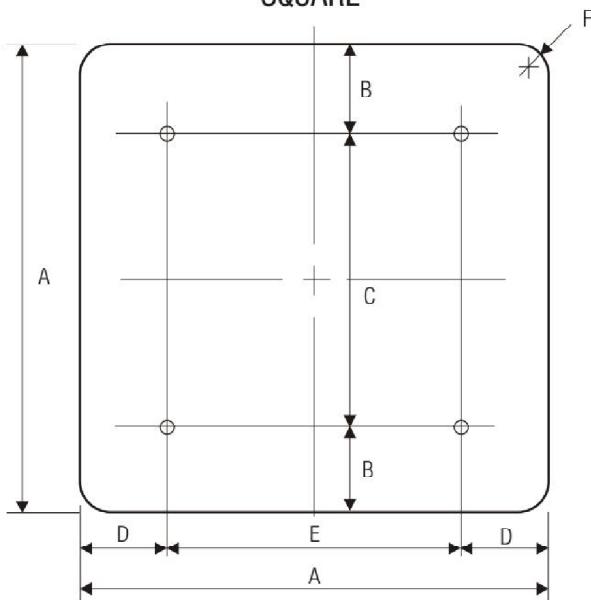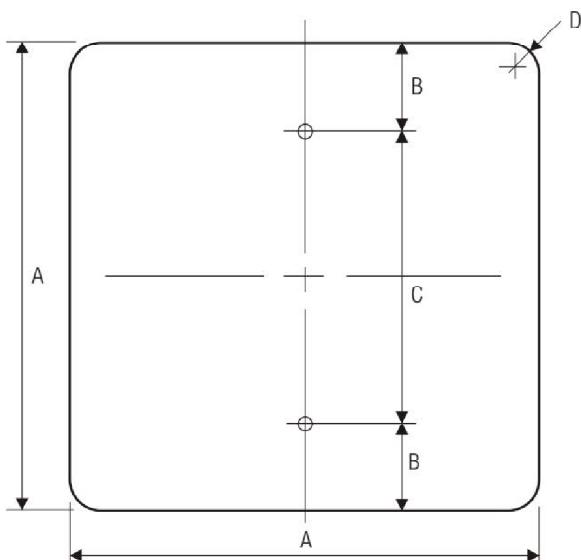

A	B	C	D
18	3	12	1.5
24	3	18	1.5
30	3	24	1.875


A	B	C	D	E	F
36	6	24	6	24	2.25
48	6	36	9	30	3



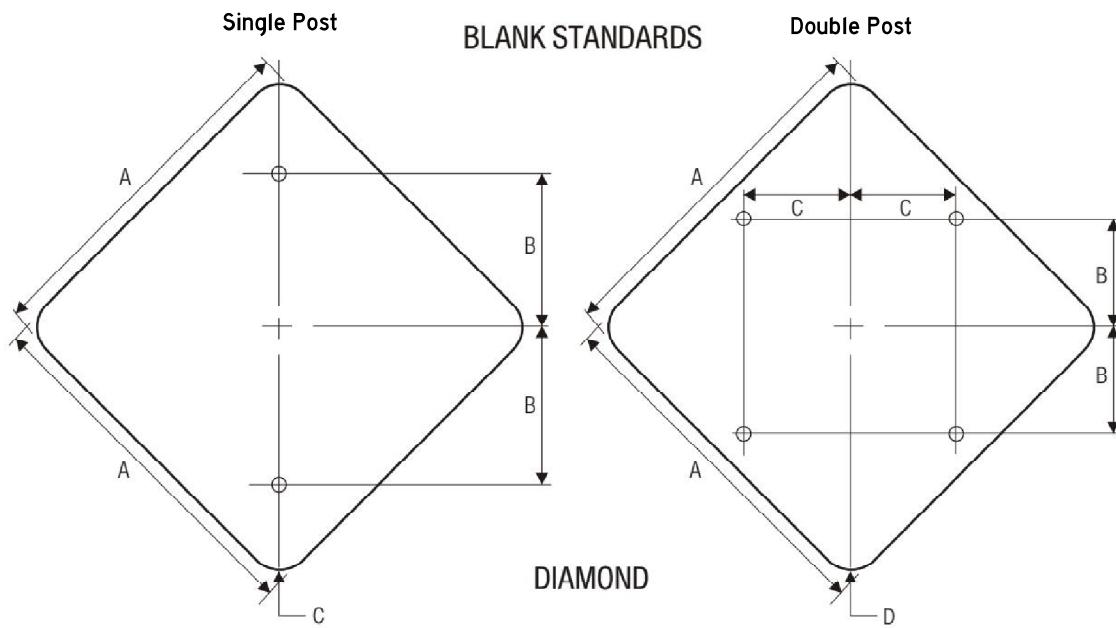

A	B	C
24	12	1.5
30	15	1.875
36	18	2.25

A	B	C	D
48	15	15	3
60	18	18	3.75

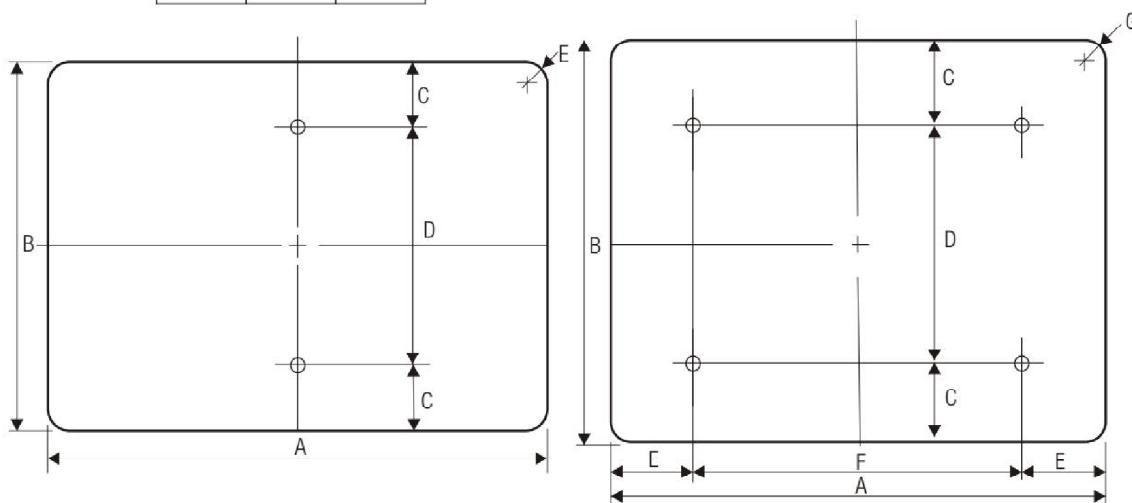



HORIZONTAL RECTANGLE

A	B	C	D	E
21	15	1.5	12	1.5
24	12	1.5	9	1.5
24	18	3	12	1.5
30	15	1.5	12	1.5
30	24	3	18	1.5
36	12	1.5	9	1.5

A	B	C	D	E	F	G
36	24	3	18	6	24	1.5
48	24	3	18	9	30	1.875
48	36	6	24	9	30	2.25
60	24	3	18	12	36	1.5
60	36	6	24	12	36	2.25



BLANK STANDARDS

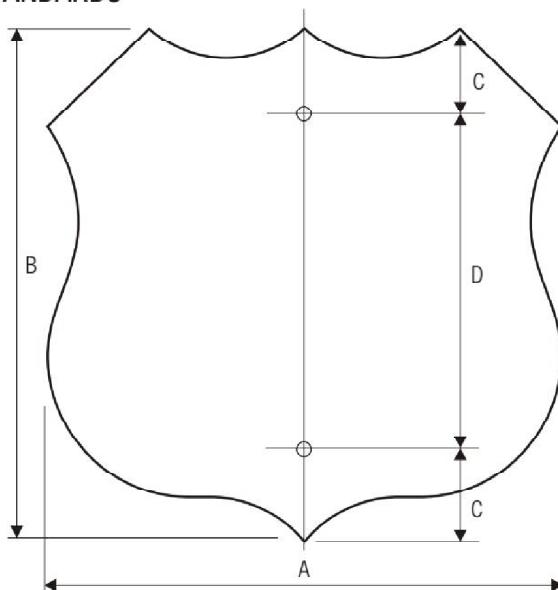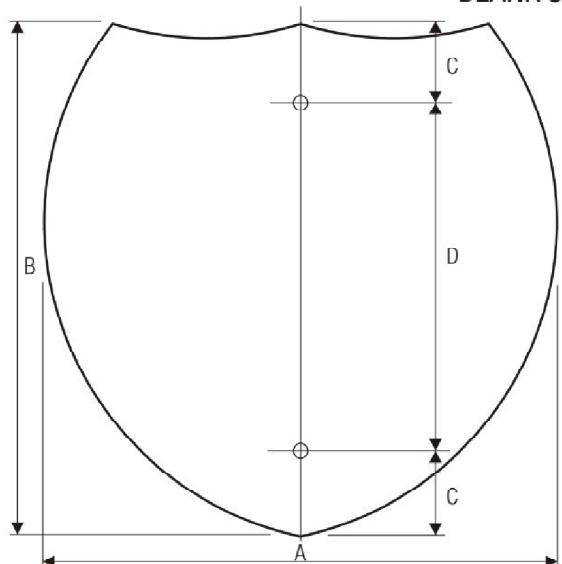


INTERSTATE SHIELD

A	B	C	D
24	24	3	18
30	24	3	18
36	36	6	24
45	36	6	24


U.S. SHIELD

A	B	C	D
24	24	3	18
30	24	3	18
36	36	6	24
45	36	6	24

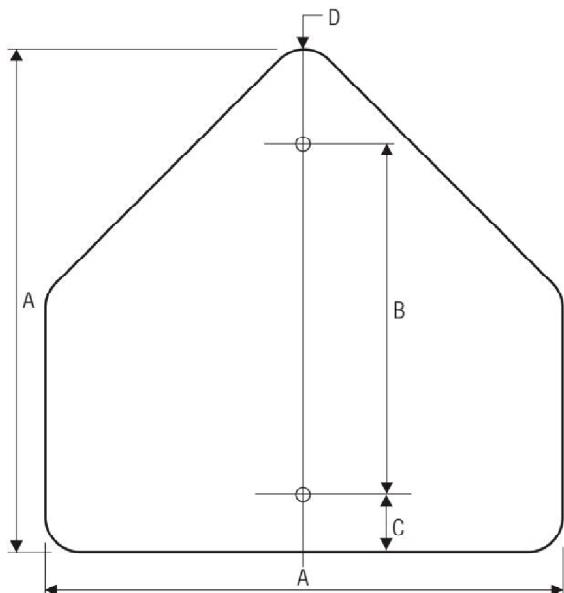

PENTAGON (SCHOOL)

A	B	C	D
30	21	3	1.875
36	24	3	2.25

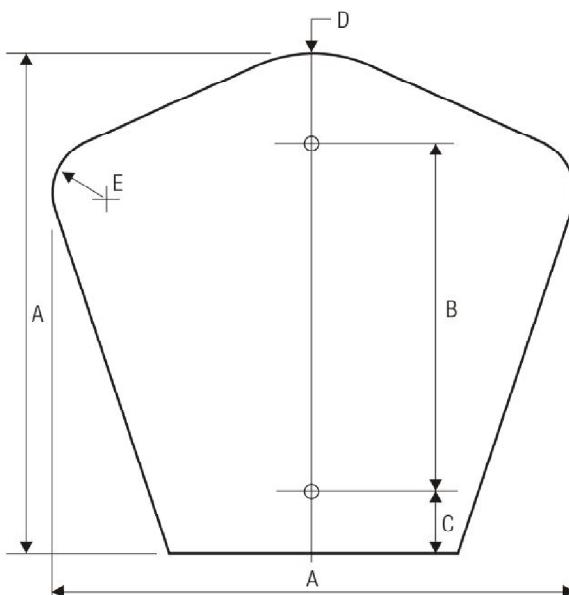


COUNTY SHIELD

A	B	C	D	E
18	15	1	5	2
24	18	2	5.313	2.688
30	24	2	6.625	3.375




BLANK STANDARDS

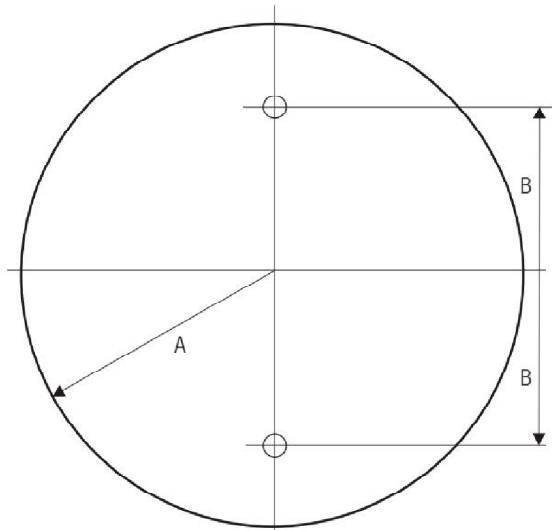


CIRCLE

A	B
15	12
18	15

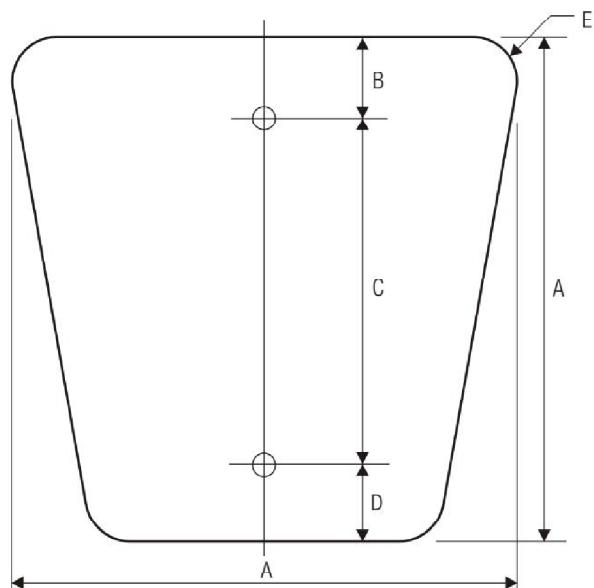

NATIONAL FOREST SHIELD

A	B	C	D	E
18	2	15	1	2
24	2.5	20	1.5	2.5

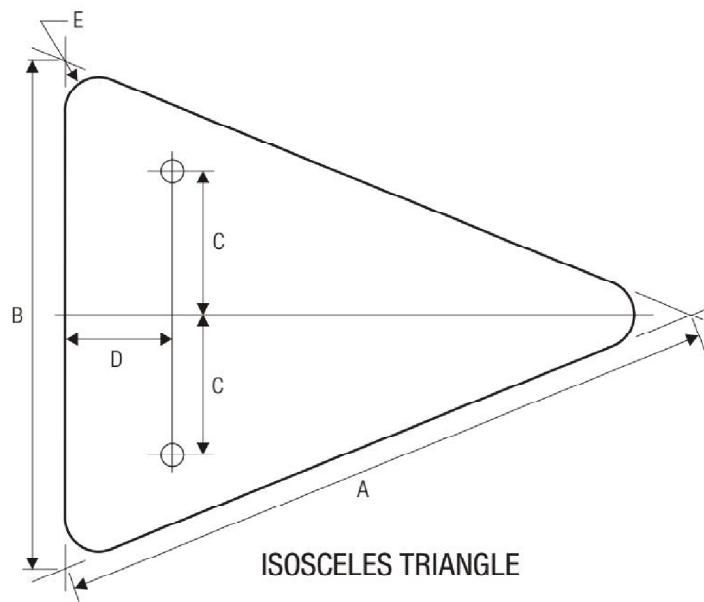

ISOSCELES TRIANGLE

A	B	C	D	E
40	30	7.5	12	1.875
48	36	9	15	2.25



WINDLOAD COORDINATES FOR TELESPAR® AT 90 MPH

(AASHTO Standard Specifications for Structural supports for - Highway Signs, Luminaires and Traffic Signals, 4th Edition 2001)

Page 20-6

2025/09/18

SLIP BASE NOT ALLOWED

MAXIMUM 3 SLIP BASES ALLOWED IN 7' SPAN

SIGN CENTROID	FHWA APPROVED FOR: 2 POSTS PER SIGN						1 POST PER SIGN			SLIP BASE OPTIONAL ***			SLIP BASE REQUIRED		
	1½" x 12 ga perf.	1½" x 14 ga perf.	1¾" x 12 ga perf.	2" x 14 ga perf.	2" x 12 ga perf.	2¼" x 14 ga perf.	2½" x 12 ga perf.	2½" x 10 ga perf.	2½" x 12 ga perf.	2½" x 10 ga perf.	3" x 8 ga solid	3" x 7 ga solid			
16.5'	3.46	3.90	4.85	5.19	6.48	6.67	8.34	9.03	10.44	12.04	18.78	21.07	25.45	28.57	
16'	3.57	4.02	5.00	5.36	6.68	6.88	8.60	9.31	10.76	12.41	19.36	21.73	26.24	29.46	
15.5'	3.68	4.15	5.17	5.53	6.90	7.11	8.88	9.61	11.11	12.82	19.99	22.43	27.09	30.41	
15'	3.81	4.29	5.34	5.71	7.13	7.34	9.17	9.93	11.48	13.24	20.65	23.18	27.99	31.43	
14.5'	3.94	4.44	5.52	5.91	7.37	7.60	9.49	10.28	11.87	13.70	21.36	23.97	28.96	32.51	
14'	4.08	4.59	5.72	6.12	7.64	7.87	9.83	10.64	12.30	14.19	22.13	24.83	29.99	33.67	
13.5'	4.23	4.76	5.93	6.35	7.92	8.16	10.19	11.04	12.75	14.71	22.95	25.75	31.10	34.92	
13'	4.39	4.95	6.16	6.59	8.22	8.47	10.59	11.46	13.24	15.28	23.83	26.74	32.30	36.26	
12.5'	4.57	5.15	6.41	6.86	8.55	8.81	11.01	11.92	13.77	15.89	24.78	27.81	33.59	37.71	
12'	4.76	5.36	6.67	7.14	8.91	9.18	11.47	12.42	14.35	16.55	25.82	28.97	34.99	39.28	
11.5'	4.96	5.59	6.96	7.45	9.30	9.58	11.97	12.96	14.97	17.27	26.94	30.23	36.51	40.99	
11'	5.19	5.85	7.28	7.79	9.72	10.01	12.51	13.54	15.65	18.06	28.16	31.6	38.17	42.85	
10.5'	5.44	6.13	7.63	8.16	10.18	10.49	13.11	14.19	16.40	18.92	29.50	33.11	39.99	44.89	
10'	5.71	6.43	8.01	8.57	10.69	11.01	13.76	14.90	17.22	19.86	30.98	34.76	41.99	47.14	
9.5'	6.01	6.77	8.43	9.02	11.25	11.59	14.49	15.68	18.12	20.91	32.61	36.59	44.20	49.62	
9'	6.34	7.15	8.90	9.52	11.88	12.24	15.29	16.55	19.13	22.07	34.42	38.63	46.65	52.38	
8.5'	6.72	7.57	9.42	10.08	12.58	12.96	16.19	17.53	20.26	23.37	36.45	40.90	49.40	55.46	
8'	7.14	8.04	10.01	10.71	13.36	13.77	17.20	18.62	21.52	24.83	38.72	43.45	52.48	58.92	

* USE A MULTIPLIER OF 2 OR 3 FOR 2 & 3 POST INSTALLATIONS.

** SLIP BASE REQUIRED ON 2 & 3 POST INSTALLATION.





WINDLOAD COORDINATES FOR TELESPAR® AT 100 MPH

(AASHTO Standard Specifications for Structural supports for - Highway Signs, Luminaires and Traffic Signals, 4th Edition 2001)

SIGN CENTROID	SLIP BASE NOT ALLOWED				MAXIMUM 3 SLIP BASES ALLOWED IN 7' SPAN			
	FHWA APPROVED FOR: 2 POSTS PER SIGN				SLIP BASE OPTIONAL**			
	1 POST PER SIGN	2 POSTS PER SIGN	3 POSTS PER SIGN	4 POSTS PER SIGN	2 1/2" x 10 ga perf.	2 1/2" x 12 ga perf.	2 1/2" x 14 ga perf.	2 1/2" x 16 ga perf.
1 1/2"	1.22	1.22	1.22	1.22	1.22	1.22	1.22	1.22
16.5'	2.77	3.12	3.89	4.16	5.20	5.35	6.70	7.26
16'	2.85	3.21	4.01	4.29	5.36	5.52	6.91	7.49
15.5'	2.95	3.32	4.14	4.43	5.54	5.70	7.13	7.73
15'	3.04	3.43	4.28	4.58	5.72	5.89	7.37	7.99
14.5'	3.15	3.55	4.43	4.73	5.92	6.09	7.63	8.26
14'	3.26	3.67	4.58	4.90	6.13	6.31	7.90	8.56
13.5'	3.38	3.81	4.75	5.08	6.36	6.54	8.19	8.88
13'	3.51	3.96	4.94	5.28	6.60	6.80	8.51	9.22
12.5'	3.65	4.11	5.13	5.49	6.87	7.07	8.85	9.59
12'	3.80	4.28	5.35	5.72	7.15	7.36	9.22	9.99
11.5'	3.97	4.47	5.58	5.97	7.46	7.68	9.62	10.42
11'	4.15	4.67	5.83	6.24	7.80	8.03	10.05	10.89
10.5'	4.35	4.90	6.11	6.54	8.17	8.41	10.53	11.41
10'	4.57	5.14	6.42	6.86	8.58	8.83	11.06	11.98
9.5'	4.81	5.41	6.75	7.23	9.03	9.30	11.64	12.61
9'	5.07	5.71	7.13	7.63	9.54	9.82	12.29	13.31
8.5'	5.37	6.05	7.55	8.08	10.10	10.39	13.01	14.10
8'	5.71	6.43	8.02	8.58	10.73	11.04	13.82	14.98

* USE A MULTIPLIER OF 2 OR 3 FOR 2 & 3 POST INSTALLATIONS.
** SLIP BASE REQUIRED ON 2 & 3 POST INSTALLATION.

WINDLOAD COORDINATES FOR TELESPAR® AT 110 MPH

(AASHTO Standard Specifications for Structural supports for - Highway Signs, Luminaires and Traffic Signals, 4th Edition 2001)

Page 20-8

SLIP BASE NOT ALLOWED		ALLOWABLE SIGN AREA (FT²) PER SINGLE POST*		MAXIMUM 3 SLIP BASES ALLOWED IN 7' SPAN	
------------------------------	--	--	--	--	--

SIGN CENTROID	FHW/A APPROVED FOR: 2 POSTS PER SIGN	1 POST PER SIGN		SLIP BASE REQUIRED	
		SLIP BASE OPTIONAL**	SLIP BASE REQUIRED	SLIP BASE OPTIONAL**	SLIP BASE REQUIRED
	1½" x 12 ga perf.	1½" x 14 ga perf.	1½" x 12 ga perf.	2" x 14 ga perf.	2½" x 14 ga perf.
16.5'	2.25	2.54	3.18	3.40	4.26
16'	2.33	2.62	3.28	3.50	4.39
15.5'	2.40	2.70	3.38	3.61	4.53
15'	2.48	2.79	3.49	3.73	4.68
14.5'	2.57	2.89	3.61	3.86	4.84
14'	2.66	2.99	3.74	4.00	5.02
13.5'	2.76	3.10	3.88	4.15	5.20
13'	2.86	3.22	4.03	4.31	5.40
12.5'	2.98	3.35	4.19	4.48	5.62
12'	3.10	3.49	4.37	4.67	5.85
11.5'	3.23	3.64	4.56	4.87	6.11
11'	3.38	3.81	4.76	5.09	6.38
10.5'	3.54	3.99	4.99	5.34	6.69
10'	3.72	4.19	5.24	5.60	7.02
9.5'	3.92	4.41	5.52	5.90	7.39
9'	4.13	4.65	5.82	6.22	7.80
8.5'	4.38	4.93	6.17	6.59	8.26
8'	4.65	5.23	6.55	7.00	8.78

* USE A MULTIPLIER OF 2 OR 3 FOR 2 & 3 POST INSTALLATIONS.

** SLIP BASE REQUIRED ON 2 & 3 POST INSTALLATION.



WINDLOAD COORDINATES FOR TELESPAR® AT 120 MPH


(AASHTO Standard Specifications for Structural supports for Highway Signs, Luminaires and Traffic Signals. 4th Edition 2001)

ALLOWABLE SIGN AREA (FT²) PER SINGLE POST*

SIGN CENTROID	SLIP BASE NOT ALLOWED				MAXIMUM 3 SLIP BASES ALLOWED IN 7' SPAN			
	FHWA APPROVED FOR: 2 POSTS PER SIGN		1 POST PER SIGN		SLIP BASE OPTIONAL**		SLIP BASE REQUIRED	
1½" x 12 ga perf.	1¾" x 14 ga perf.	1¾" x 12 ga perf.	2" x 14 ga perf.	2" x 12 ga perf.	2¼" x 12 ga perf.	2½" x 10 ga perf.	2½" x 12 ga perf.	2-3/16" x 10 ga 2½" x 12 ga perf.
16.5'	1.86	2.10	2.63	2.81	3.54	3.63	4.57	4.96
16'	1.92	2.16	2.72	2.90	3.65	3.75	4.71	5.12
15.5'	1.99	2.23	2.80	2.99	3.76	3.87	4.86	5.28
15'	2.05	2.31	2.90	3.09	3.89	4.00	5.03	5.46
14.5'	2.12	2.39	3.00	3.20	4.02	4.13	5.20	5.64
14'	2.20	2.47	3.11	3.32	4.17	4.28	5.39	5.85
13.5'	2.28	2.56	3.22	3.44	4.32	4.44	5.58	6.06
13'	2.37	2.66	3.34	3.57	4.49	4.61	5.80	6.30
12.5'	2.46	2.77	3.48	3.71	4.67	4.80	6.03	6.55
12'	2.56	2.88	3.62	3.87	4.86	5.00	6.28	6.82
11.5'	2.68	3.01	3.78	4.04	5.07	5.21	6.56	7.12
11'	2.80	3.15	3.95	4.22	5.30	5.45	6.85	7.44
10.5'	2.93	3.30	4.14	4.42	5.56	5.71	7.18	7.80
10'	3.08	3.46	4.35	4.64	5.83	5.99	7.54	8.19
9.5'	3.24	3.64	4.58	4.89	6.14	6.31	7.94	8.62
9'	3.42	3.85	4.83	5.16	6.48	6.66	8.38	9.09
8.5'	3.62	4.07	5.11	5.46	6.86	7.05	8.87	9.63
8'	3.85	4.33	5.43	5.80	7.29	7.49	9.42	10.23

* USE A MULTIPLIER OF 2 OR 3 FOR 2 & 3 POST INSTALLATIONS.
** SLIP BASE REQUIRED ON 2 & 3 POST INSTALLATION.

Example of a Barrier Rail MDSB Saddle Mount Bracket

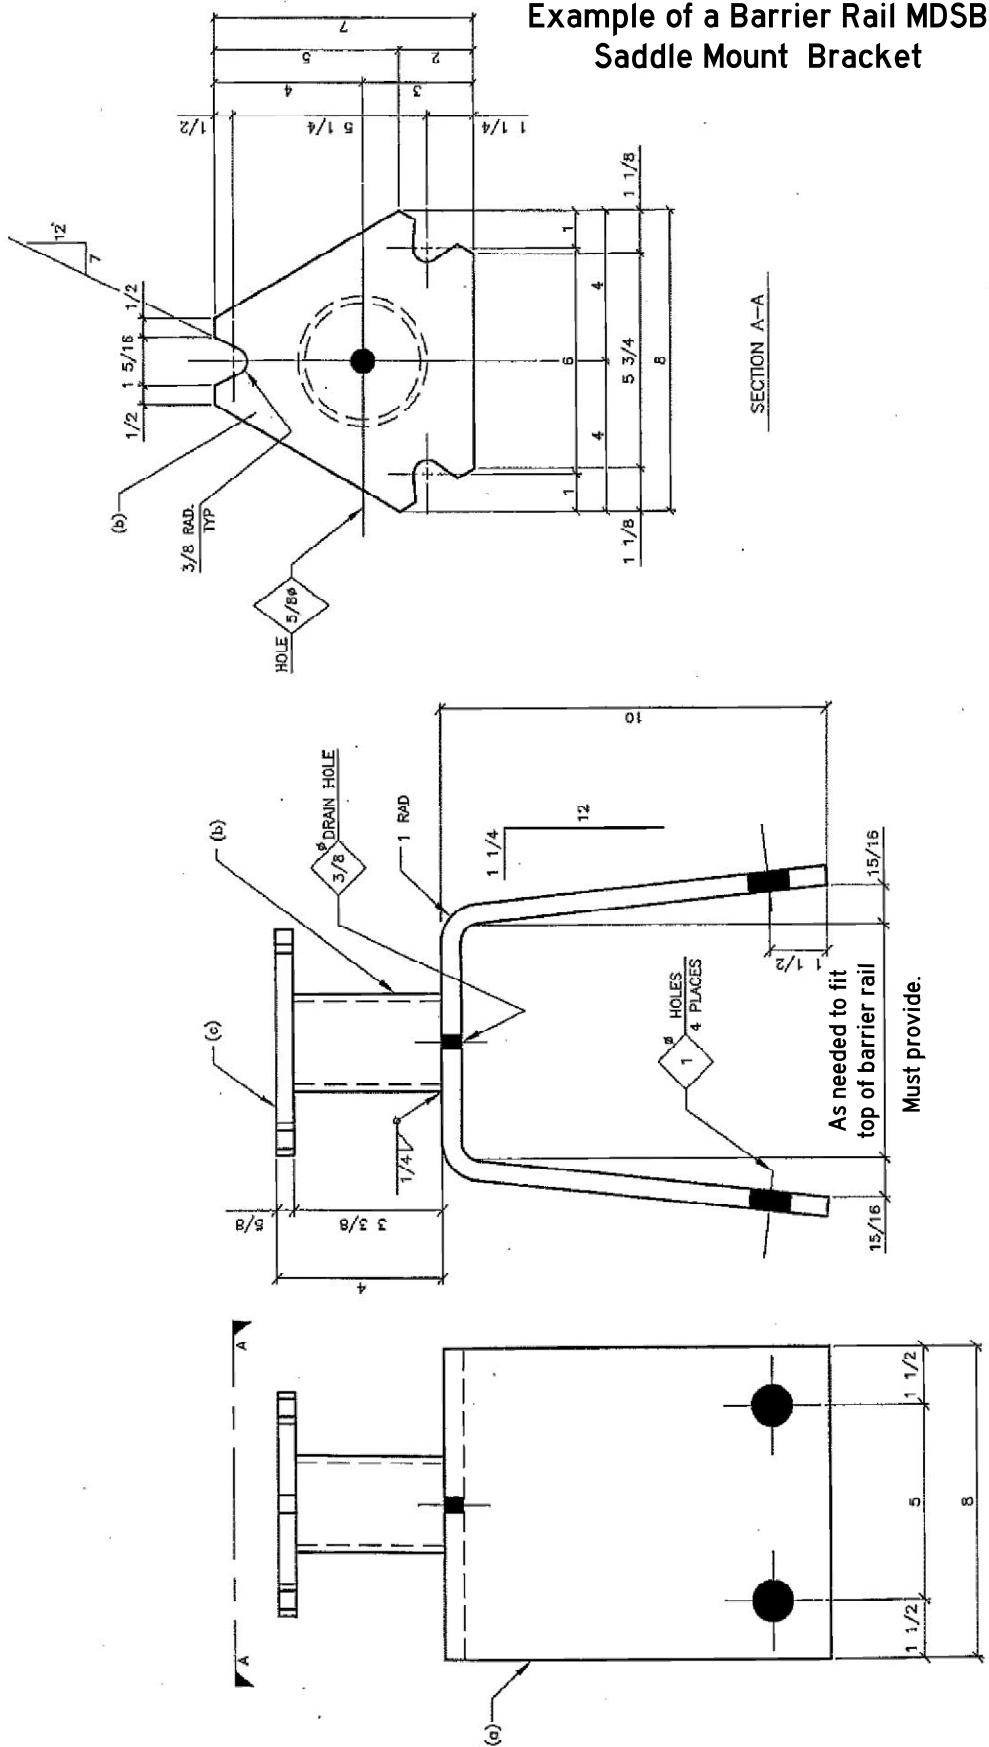

*GALVANIZE AFTER FAB.

6" BARRIER SADDLE BRACKET					
MRK	QTY.	MATERIAL DESCRIPTION	LENGTH FT.	WT IN.	
a	1	PL 3/8 X 8 (BEND)	2	1 1/2	239
b	1	3/8 STD PIPE	0	3 3/8	23
c	1	PL 5/8 TRIANGLE SLIP BASE	0	7	72
					SHIP WEIGHT:
					DRAWING NO:
					1




Clark County Traffic Markings

Pavement Marking and RPM Layouts




Proper Direction for a Striping


Striping always points to horizon
to side you want vehicle to go.

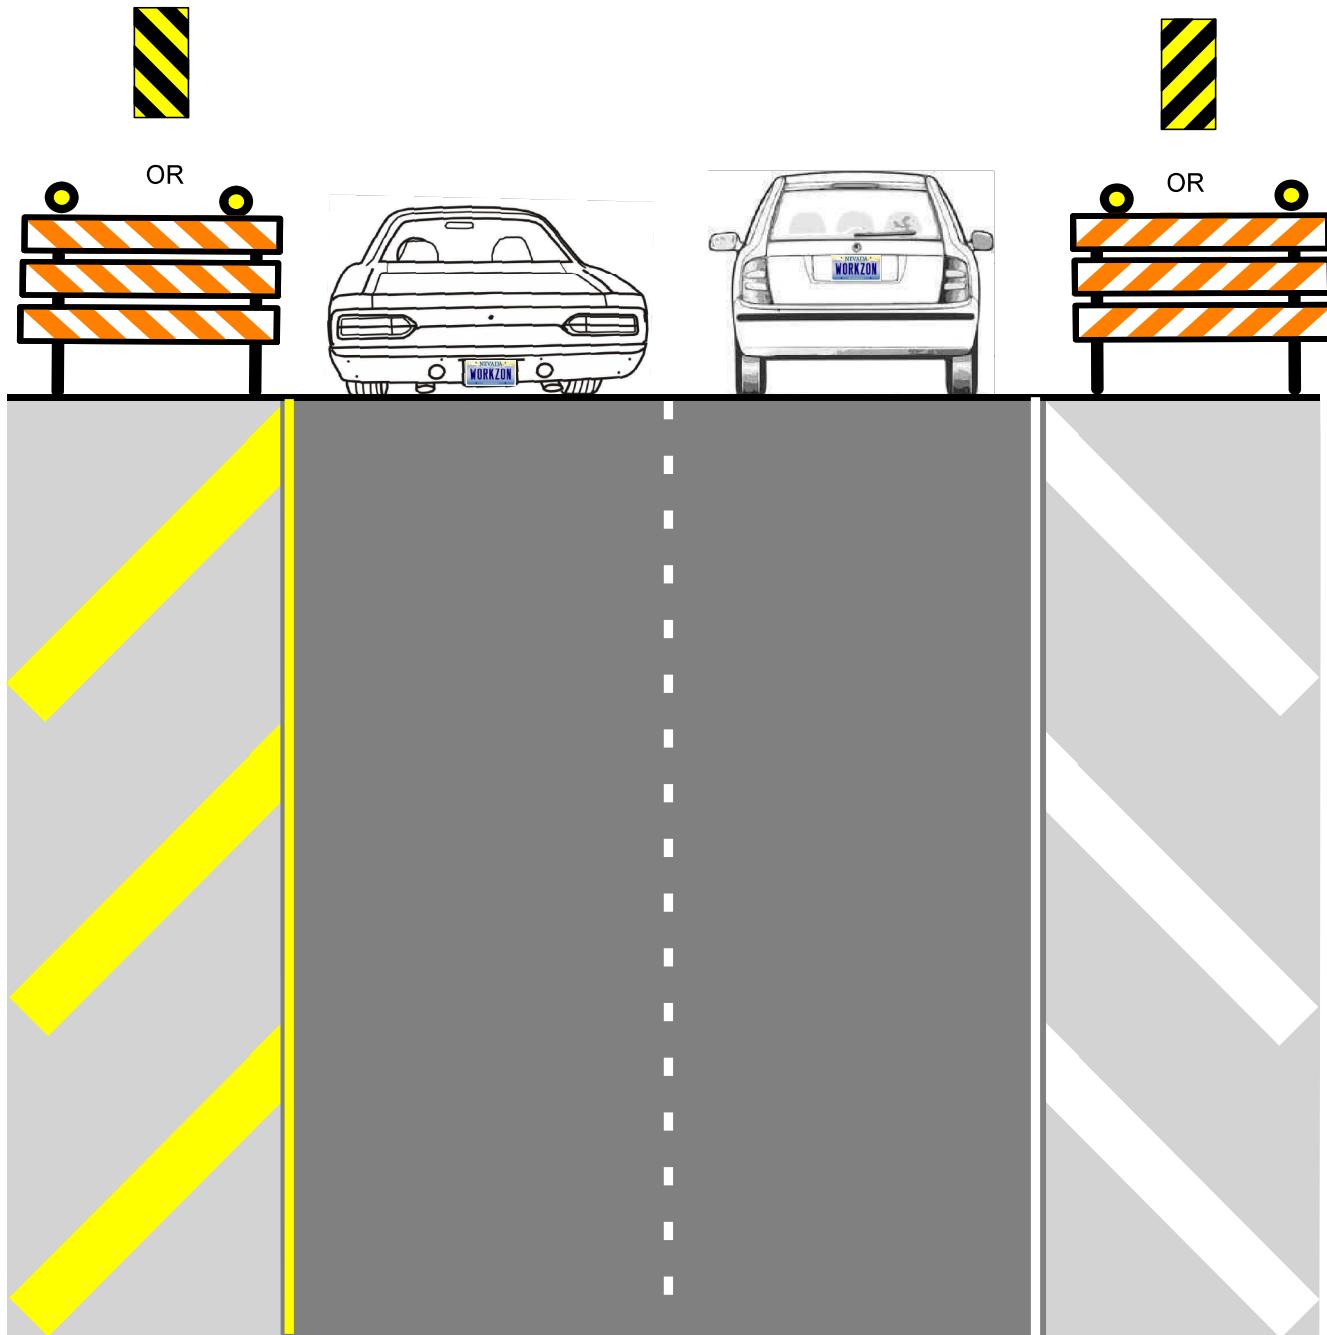

Proper Direction for Bike Lane Buffer Striping

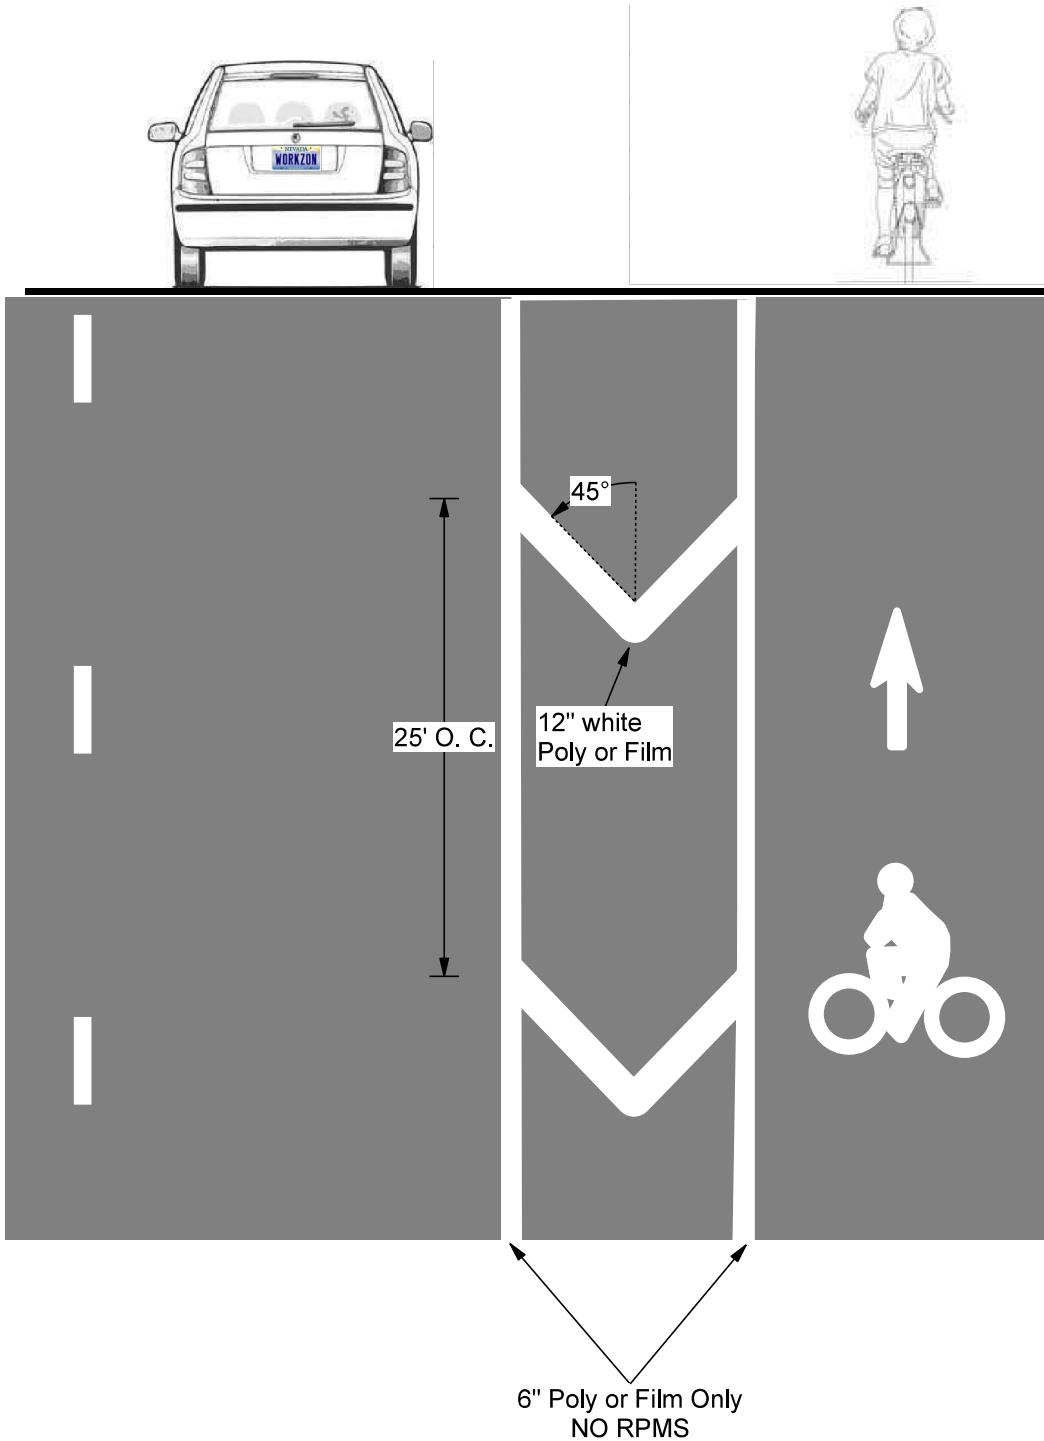



Raised Median Marking RPM Outline

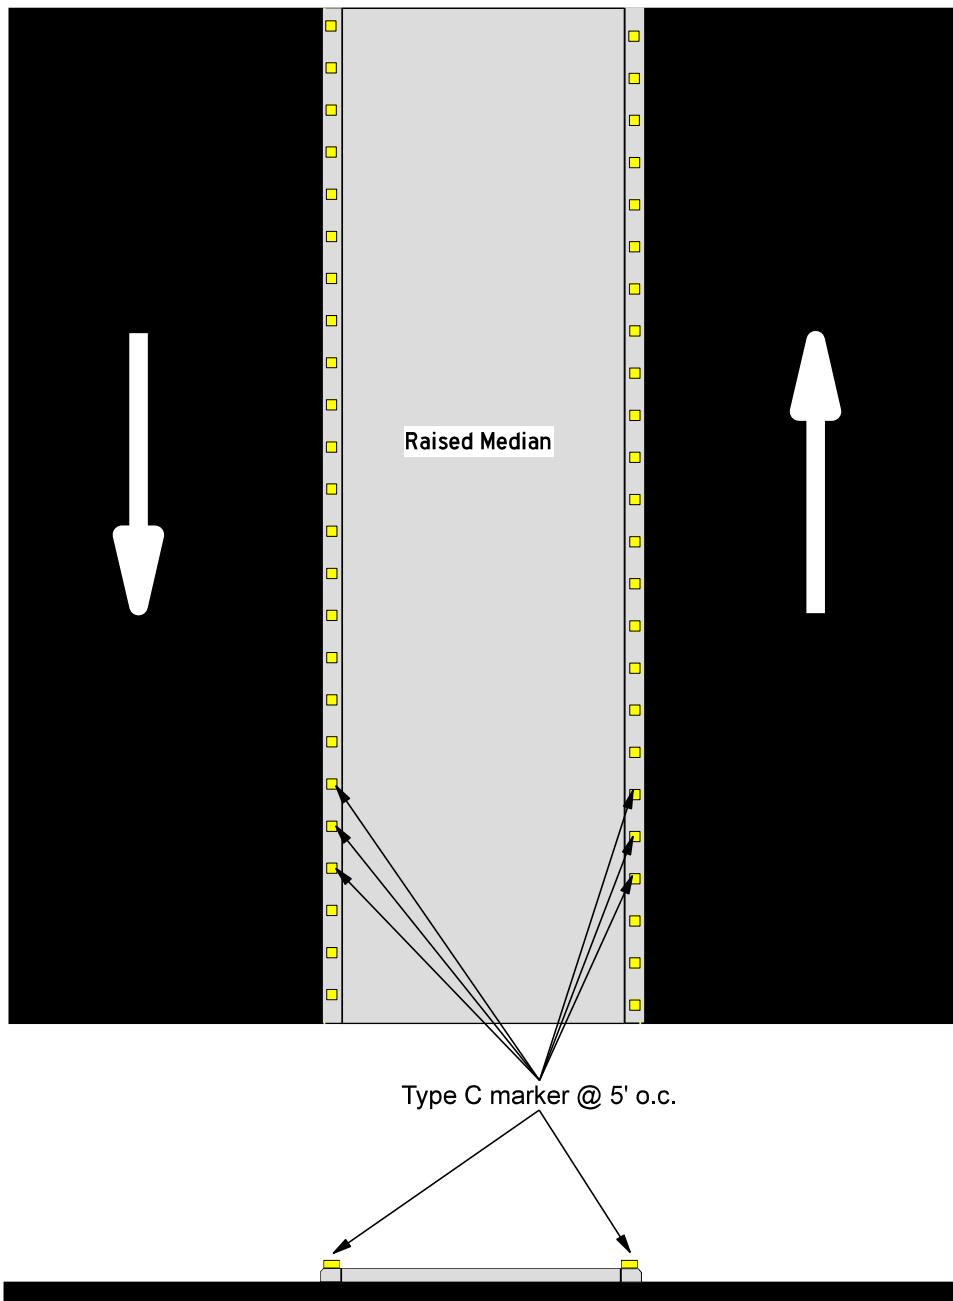

Two-way Traffic




Raised Median Marking RPM Outline

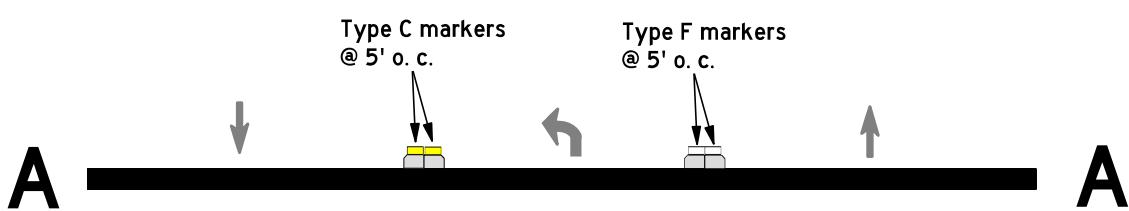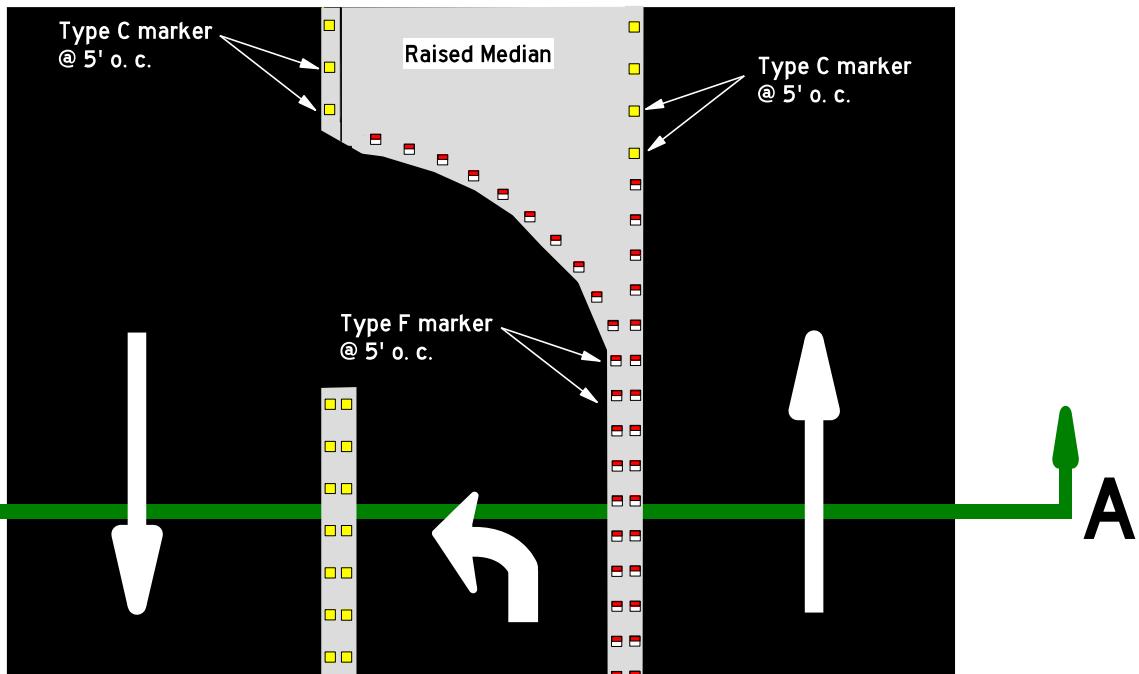

Turn Pocket



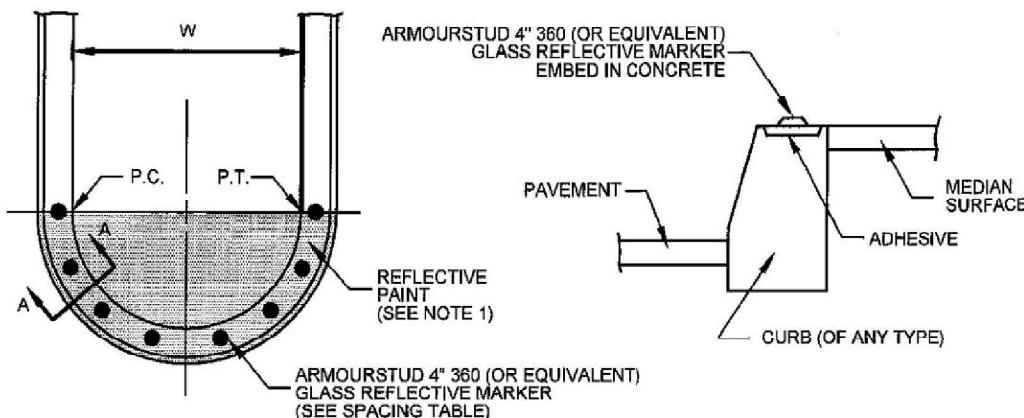

PLAN

SECTION A-A

SPACING TABLE

"W"	NUMBER OF REFLECTORS PER MEDIAN NOSE *
1.0' TO 2.0'	3
2.0' TO 3.0'	4
3.0' TO 4.0'	5
4.0' & GREATER	1 EACH FOR EVERY 1.0' OF CURB LENGTH


* 1 MARKER EACH SHALL BE PLACED ON THE P.C. AND THE P.T. OF THE MEDIAN NOSE; ALL OTHERS SPACED EQUALLY BETWEEN P.T. & P.C.

NOTE:

ENTIRE MEDIAN SHALL BE PAINTED WITH REFLECTIVE PAINT, OF SAME COLOR AS REFLECTIVE MARKERS, FROM THE MEDIAN NOSE BACK 5 FEET OR TO THE P.C., WHICHEVER IS GREATER.

		AGENCY APPROVED	C	
SPECIFICATION REFERENCE		UNIFORM STANDARD DRAWINGS CLARK COUNTY AREA		
628	PAINTING TRAFFIC STRIPING	MEDIAN NOSE MARKINGS		
633	REFLECTIVE PAVEMENT MARKERS			



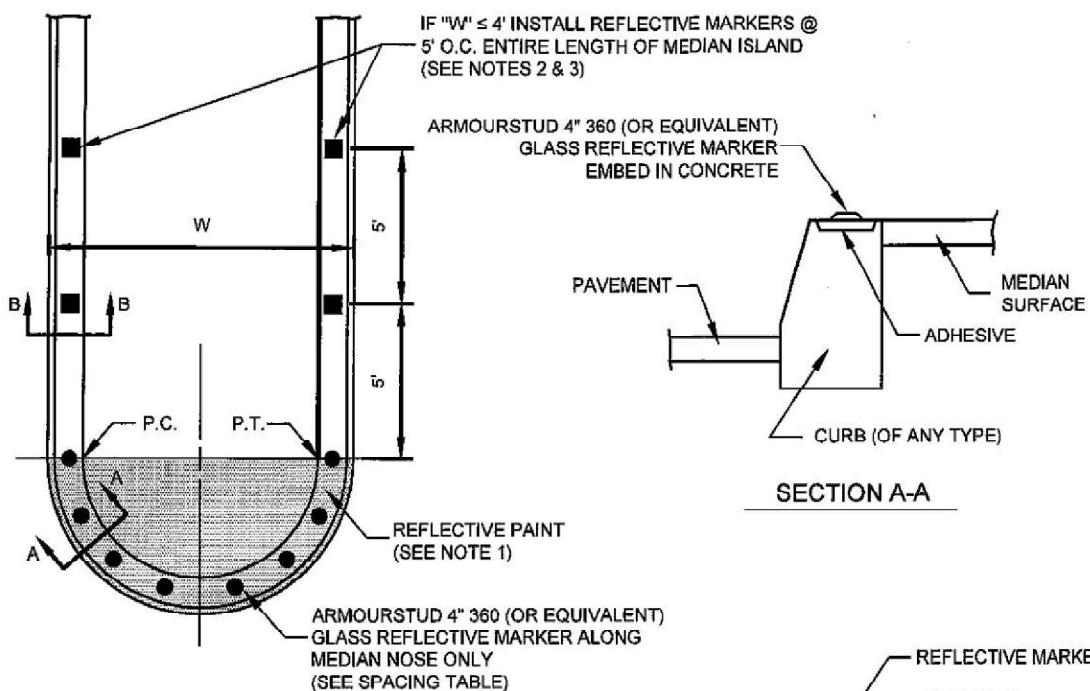

PLAN


SPACING TABLE

"W"	NUMBER OF REFLECTORS PER MEDIAN NOSE *
1.0' TO 2.0'	3
2.0' TO 3.0'	4
3.0' TO 4.0'	5
4.0' & GREATER	1 EACH FOR EVERY 1.0' OF CURB LENGTH

* 1 MARKER EACH SHALL BE PLACED ON THE P.C. AND THE P.T. OF THE MEDIAN NOSE; ALL OTHERS SPACED EQUALLY BETWEEN P.T. & P.C.

NOTES:

1. ENTIRE MEDIAN SHALL BE PAINTED WITH REFLECTIVE PAINT, OF SAME COLOR AS REFLECTIVE MARKERS, FROM THE MEDIAN NOSE BACK 5 FEET OR TO THE P.C., WHICHEVER IS GREATER.
2. REFLECTIVE PAVEMENT MARKERS USED ON MEDIAN SHALL CONFORM TO STANDARD DRAWING NO. 247.
3. ORIENTATION OF THE REFLECTIVE MARKERS FACES SHALL BE MADE IN THE FIELD TO ENSURE THAT MARKERS ARE AIMED AT APPROACHING VEHICLES TO BEST ADVANTAGE, ESPECIALLY IN HORIZONTALLY CURVED ROAD SECTIONS.

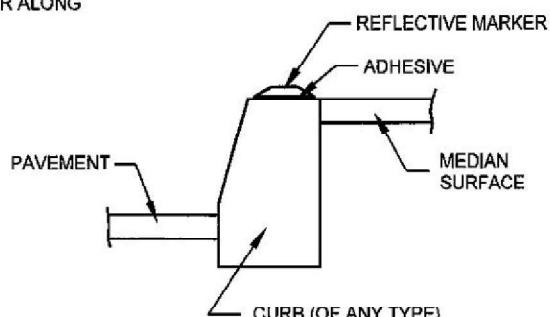

SECTION B-B

AGENCY APPROVED		C	
SPECIFICATION REFERENCE	CLARK COUNTY PUBLIC WORKS STANDARD DETAIL		
628	PAINTING TRAFFIC STRIPING		
633	REFLECTIVE PAVEMENT MARKERS		
		MEDIAN ISLAND MARKINGS	



Permanent Barricades




Correct Striping for Permanent End of Road Type 3 Barricades



(Red and White Striping)

Dead End - No ability to turn

Preferred

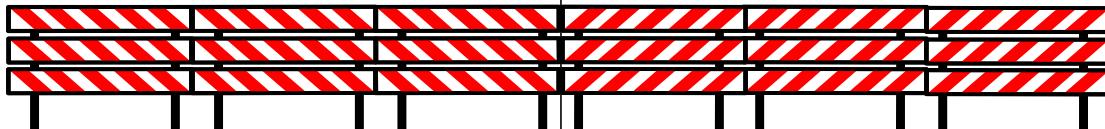


OR

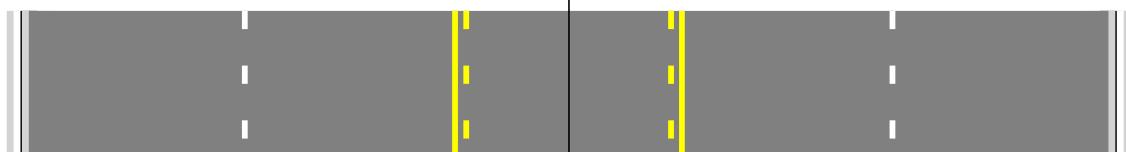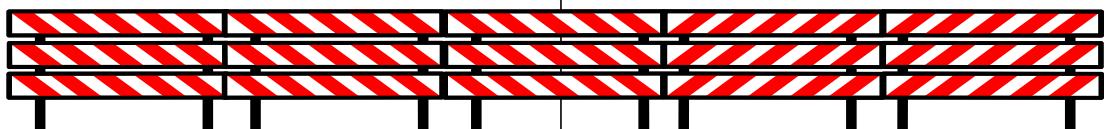


Ability to turn left and right

Preferred

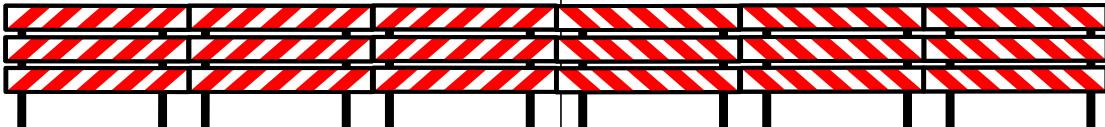





OR

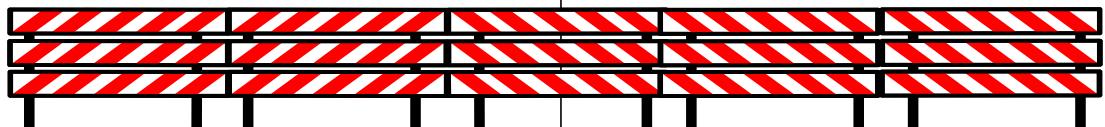


Center Line of Road/Right of Way




Incorrect Striping for End of Road Type 3 Barricades

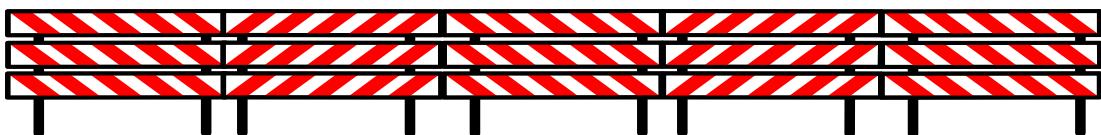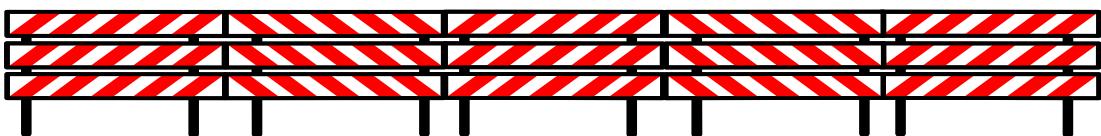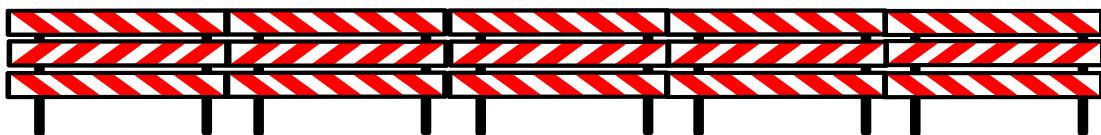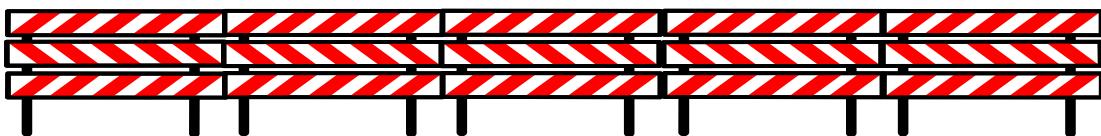

End of Road Type 3 Barricades Striping Directions Half Street Improvements

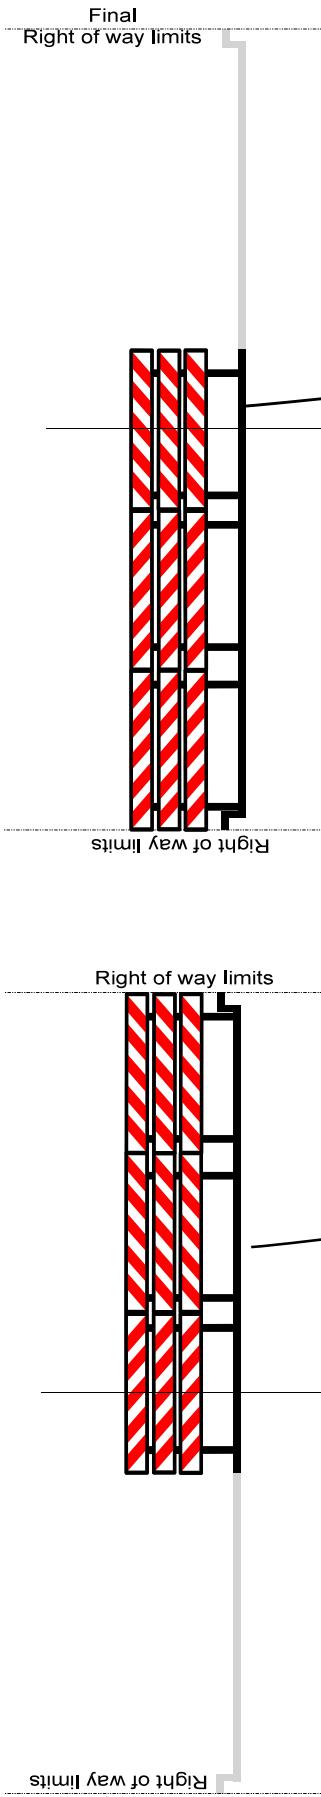

Number as needed to close roadway from edge of right of way.
Barricades to be butted up to each other, no space between.

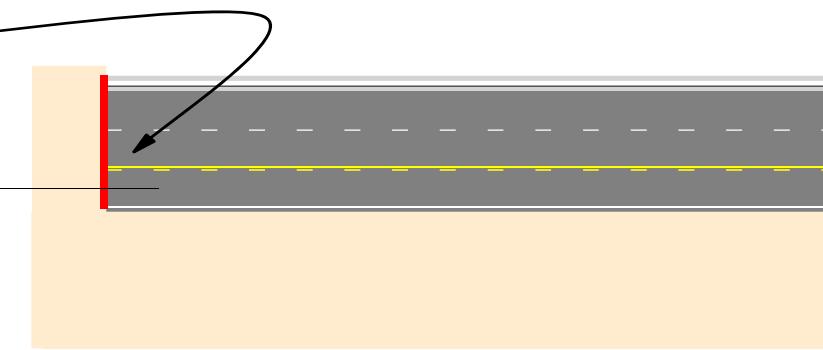


Final Right of way limits




End of Road Type 3 Barricades Striping Directions

Half Street Improvements

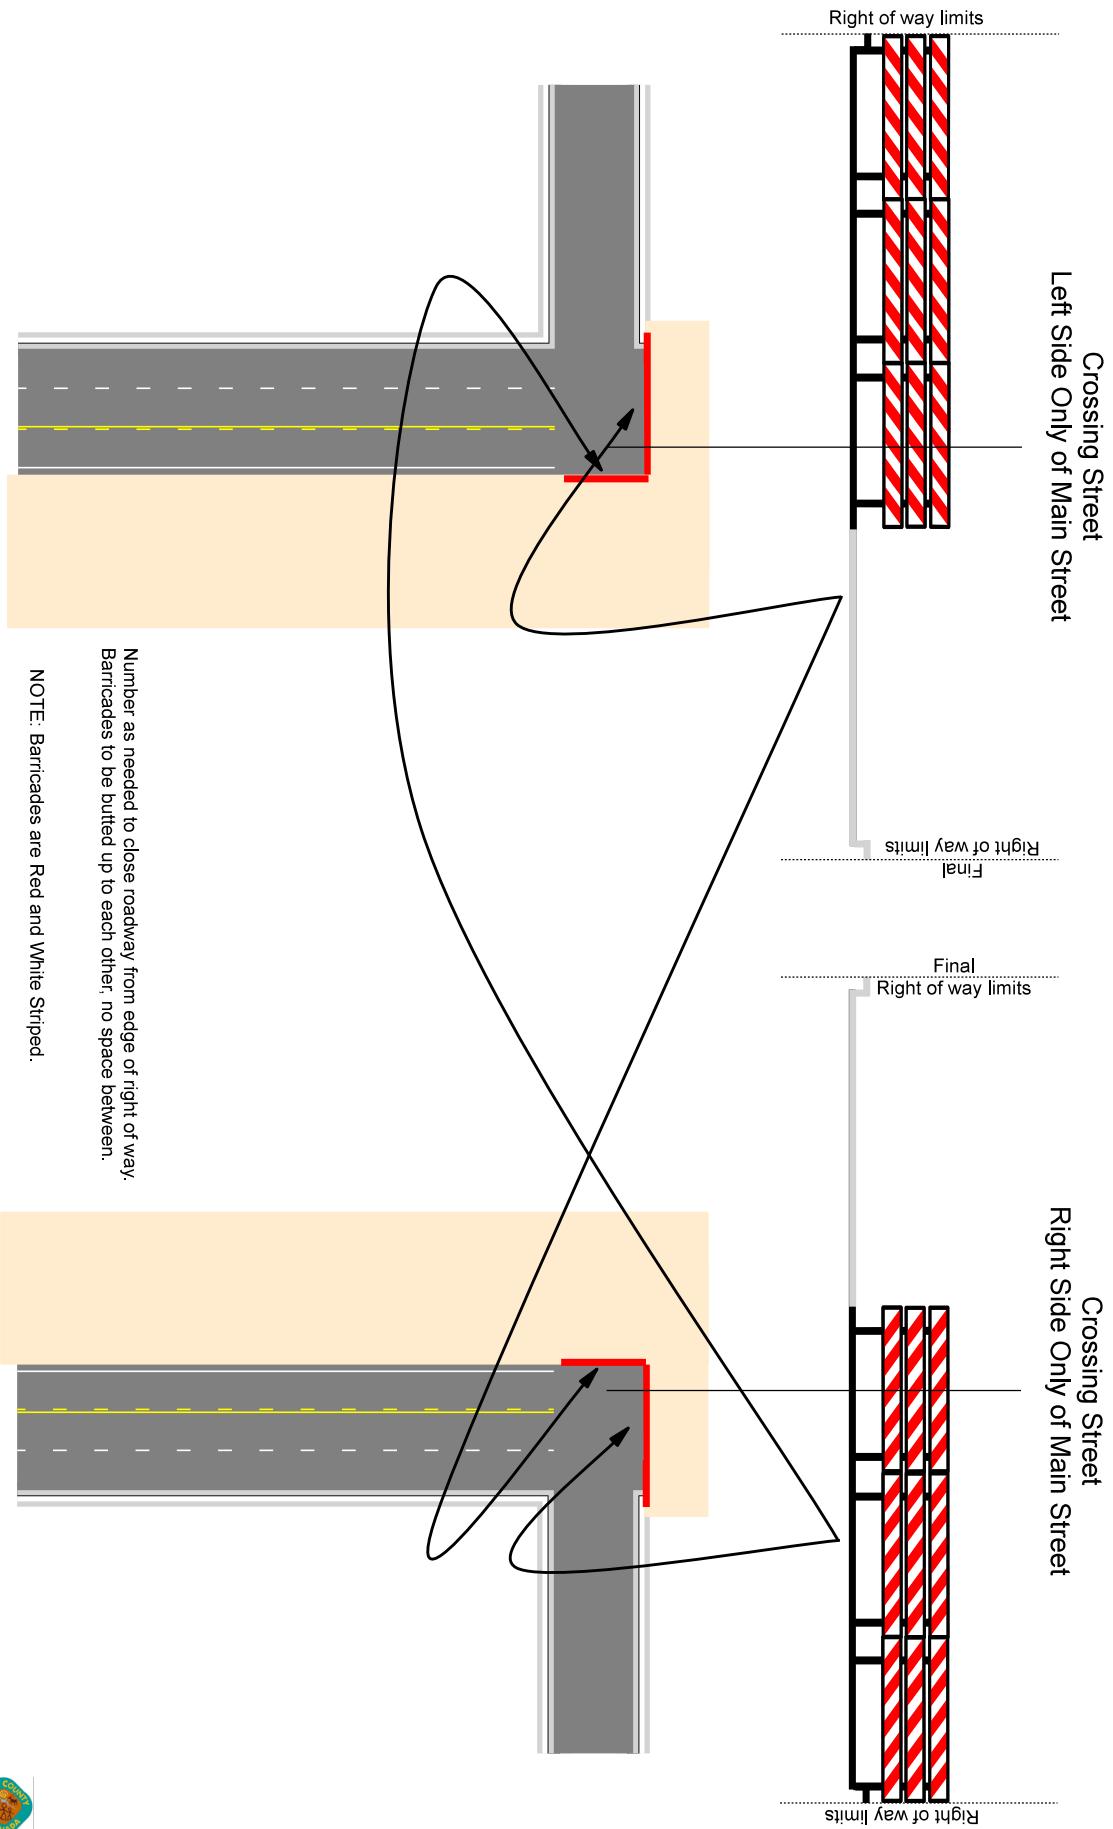

End of Road Type 3 Barricades Striping Directions

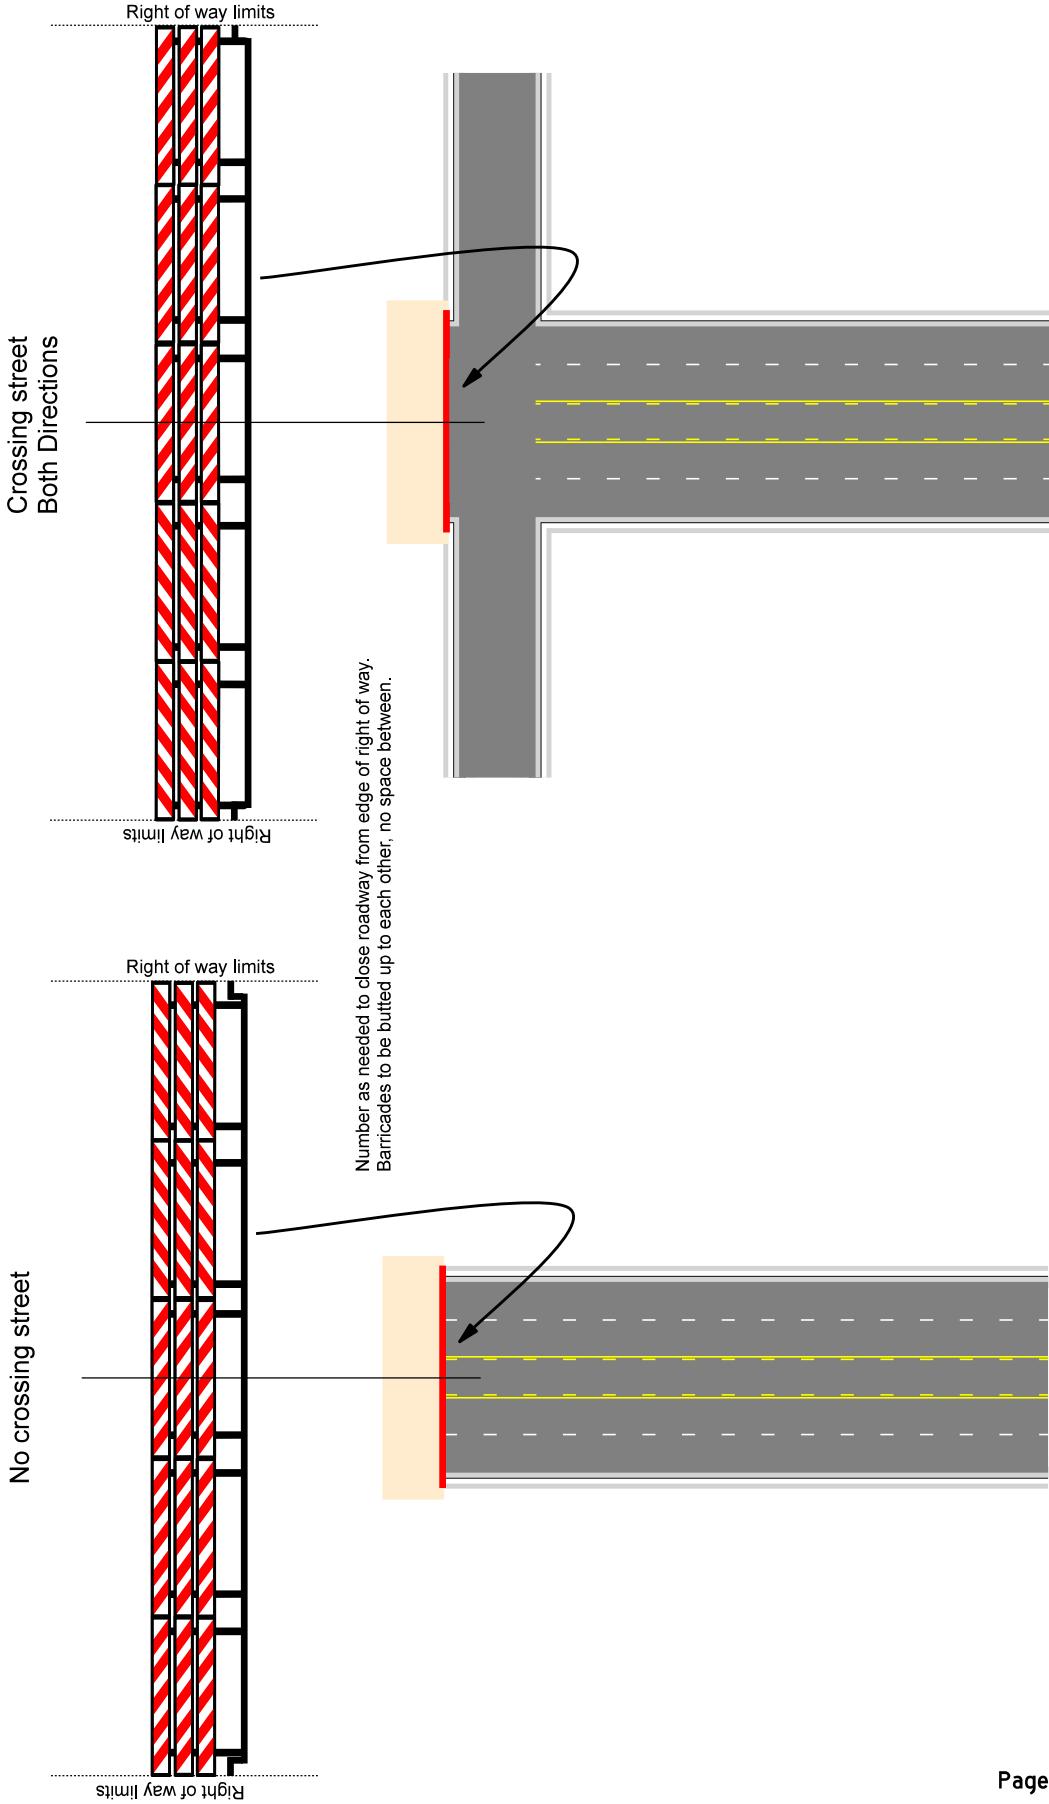


End of Road Type 3 Barricades Striping Directions


Page 2 of 2

Page 22-6

Crossing Street
Left Side Only of Main Street

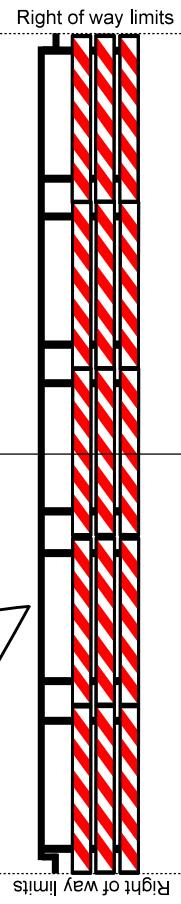

Crossing Street
Right Side Only of Main Street

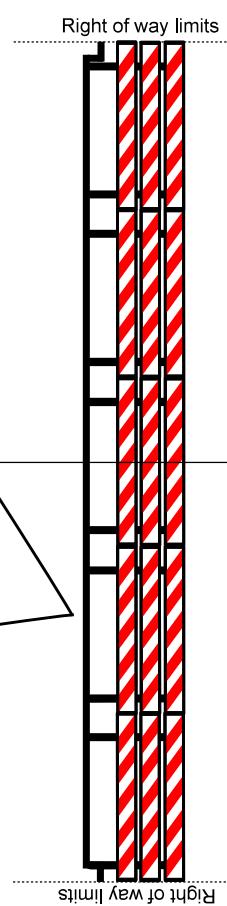

Number as needed to close roadway from edge of right of way.
Barricades to be butted up to each other, no space between.



NOTE: Barricades are Red and White Striped.



End of Road Type 3 Barricades Striping Directions ROW less than 70 feet




Page 1 of 2

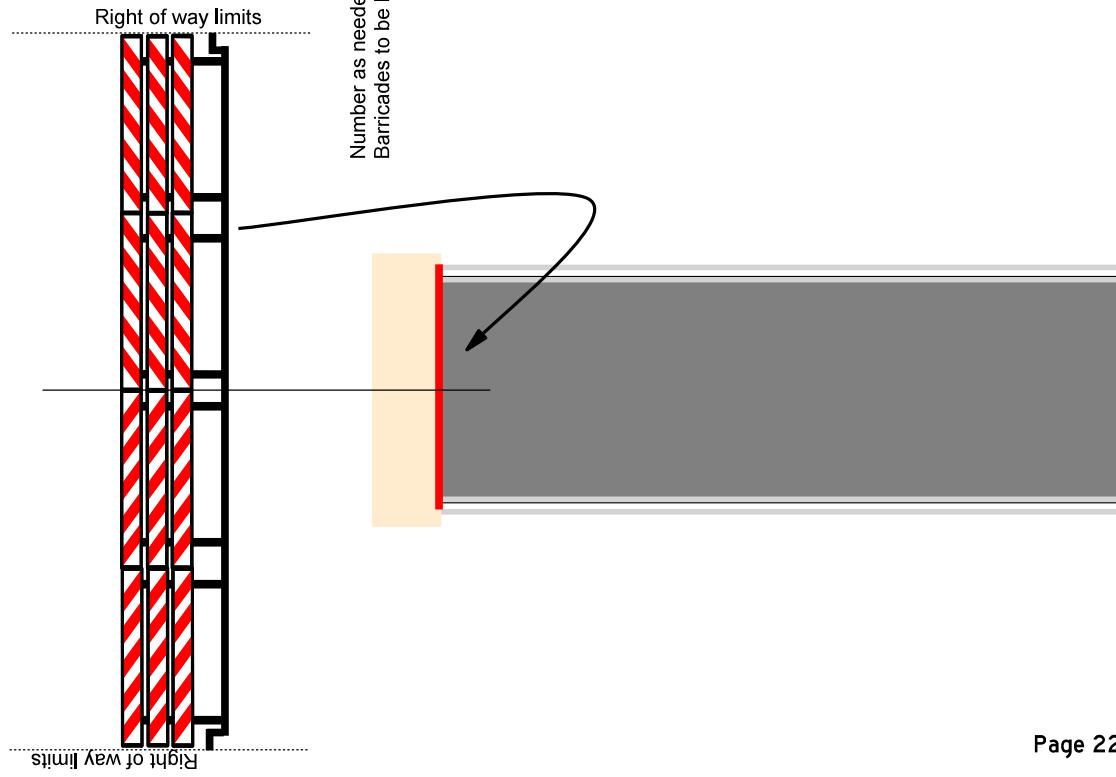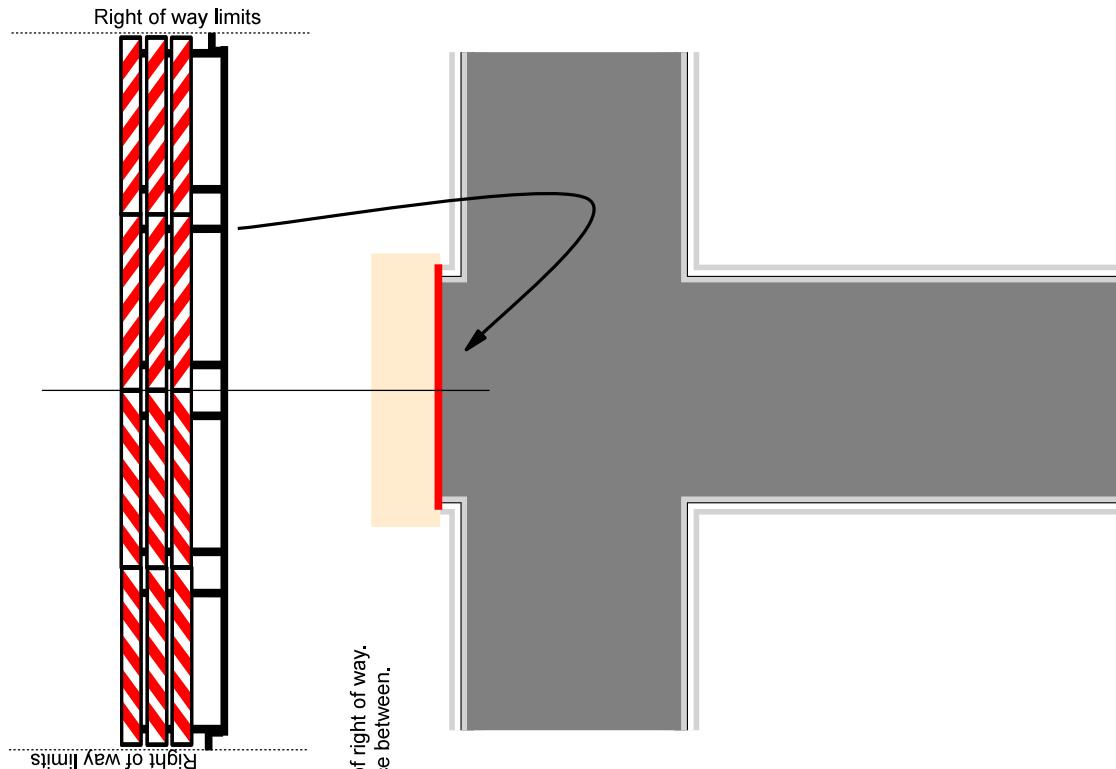

End of Road Type 3 Barricades Striping Directions Half Street Improvements - ROW less than 70 feet

Page 2 of 2

Page 22-8

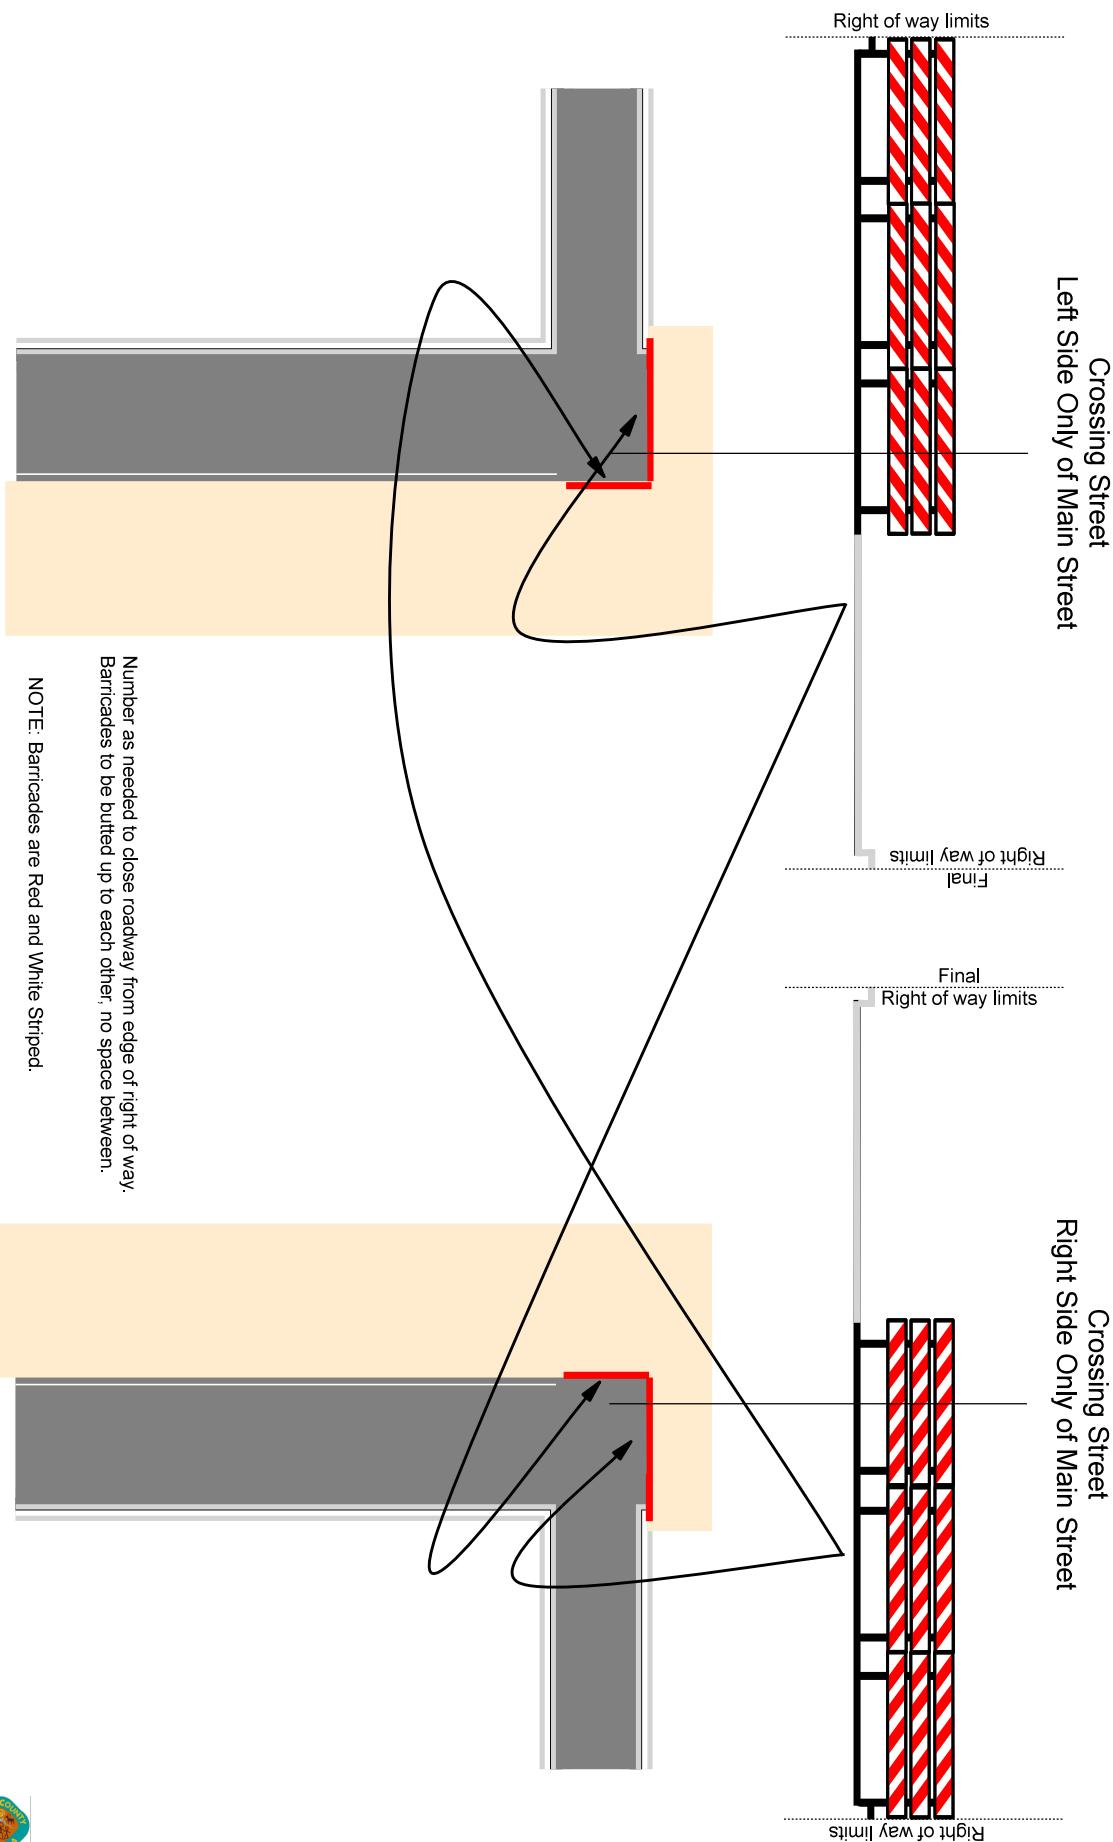


Clark County



Special Lane Patterns



Special Lane Patterns

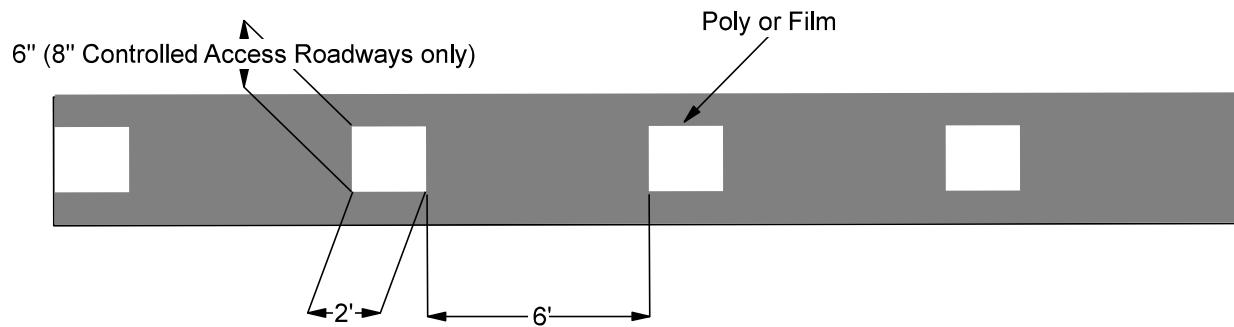

Skip Line Pattern

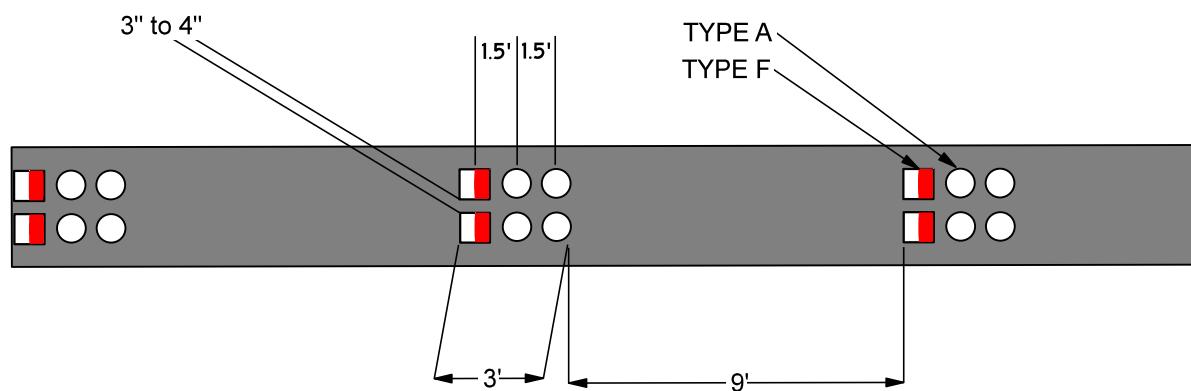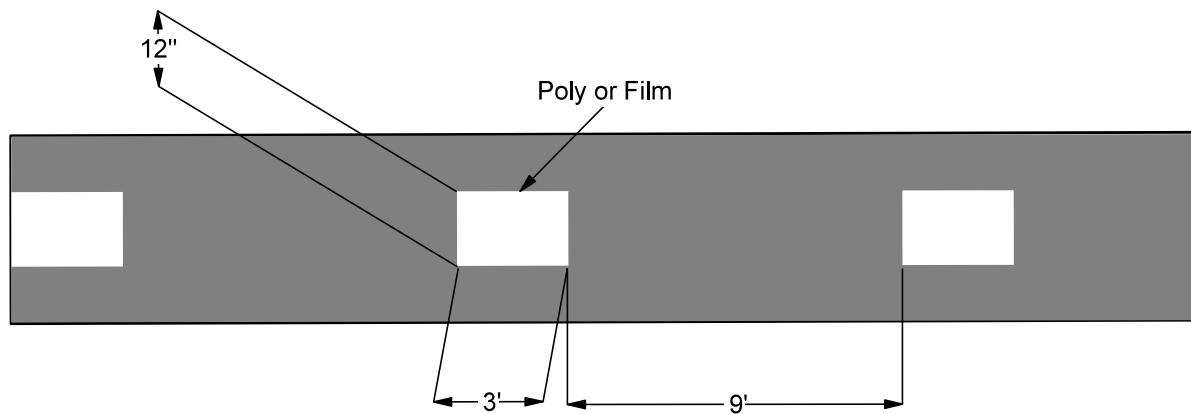

Drop Line Pattern




Clark County Traffic Markings

Controlled Access Facilities




Note: Striping NOT to be on shoulder.


Page 1 of 4

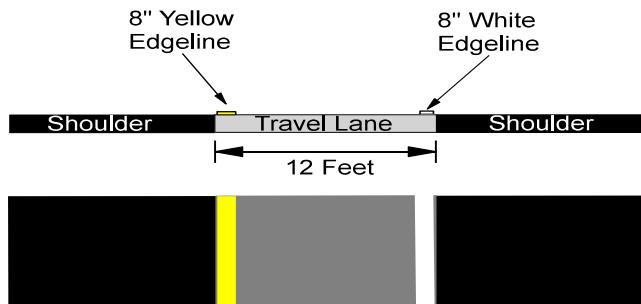


1 lane (ramp)

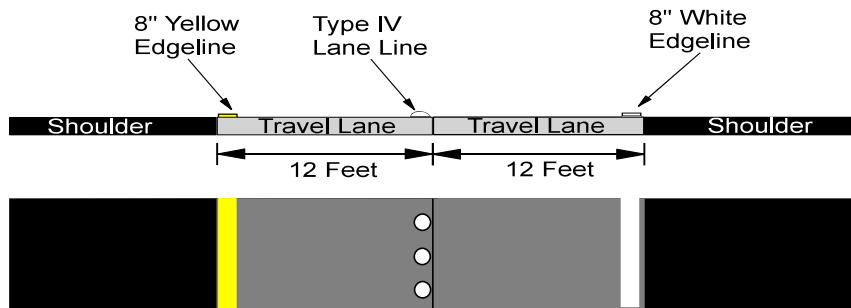

2 lanes

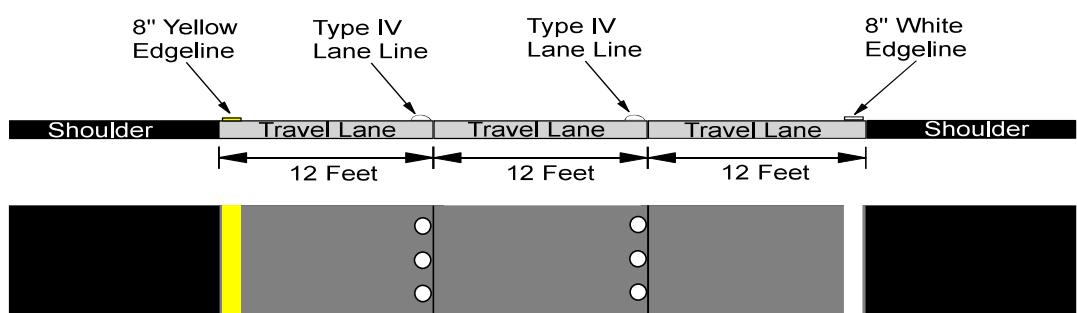

3 lanes

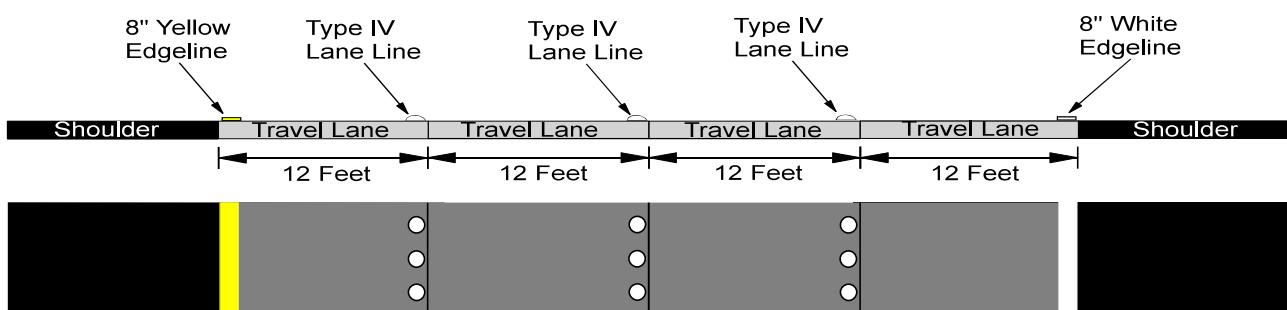


4 lanes

Correct Marking for Controlled Access Facilities




Note: Striping NOT
to be on shoulder.

Page 2 of 4

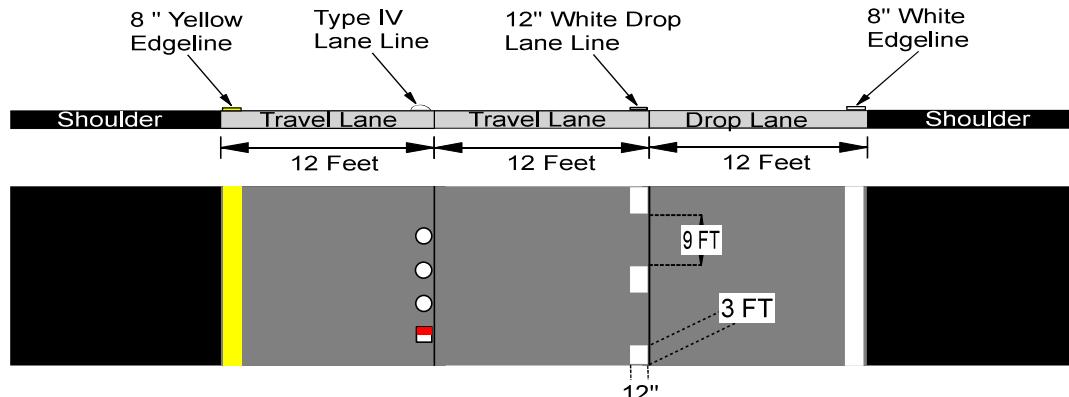

2 lanes plus drop lane


Direction of Travel

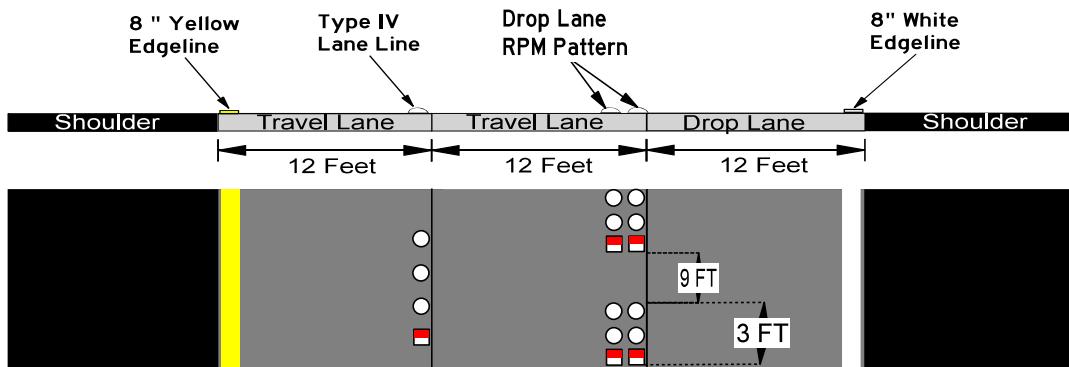

2 lanes plus RPM drop lane




Note: Striping NOT
to be on shoulder.

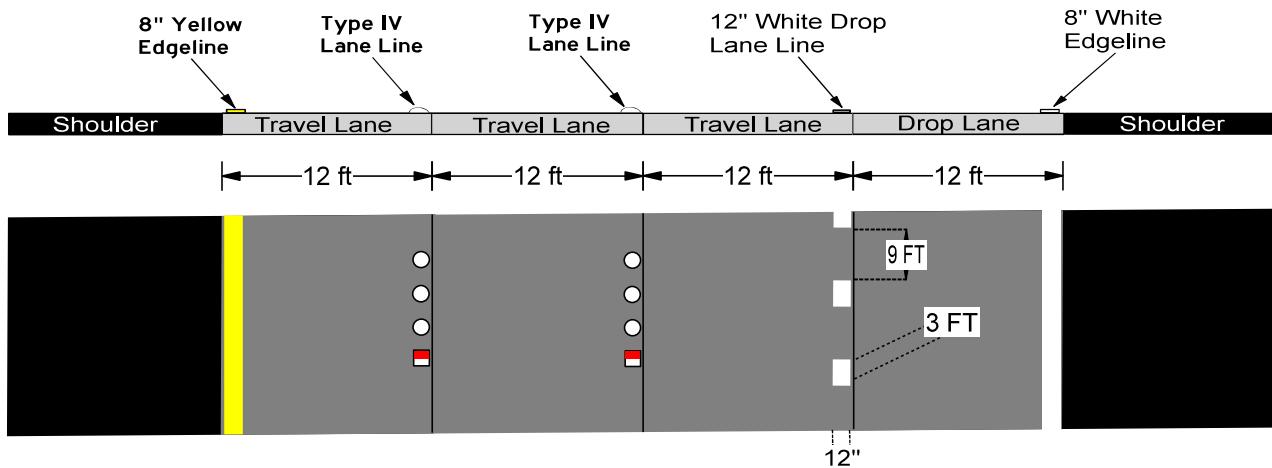

3 lanes plus drop lane


Direction of Travel

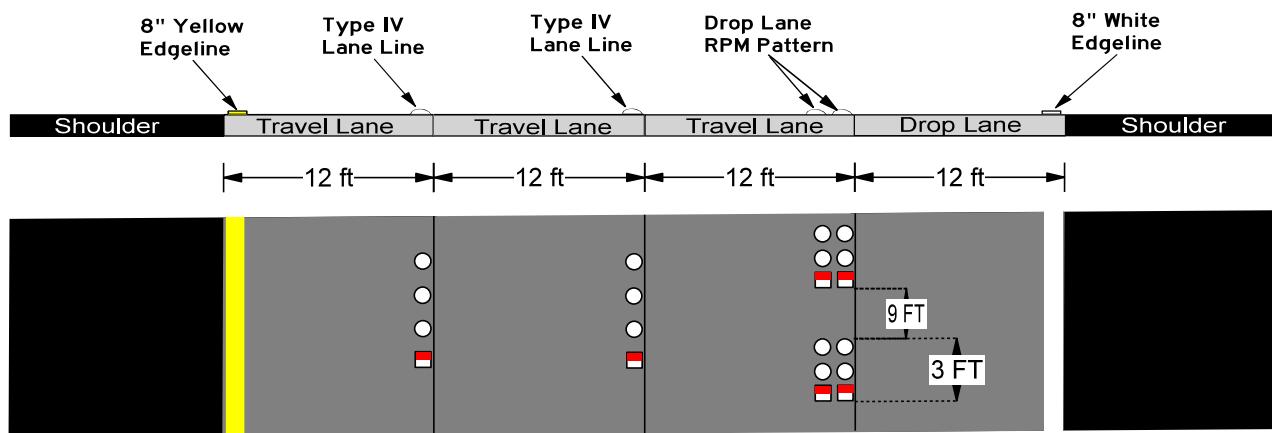

3 lanes plus RPM drop lane



Note: Striping NOT
to be on shoulder.

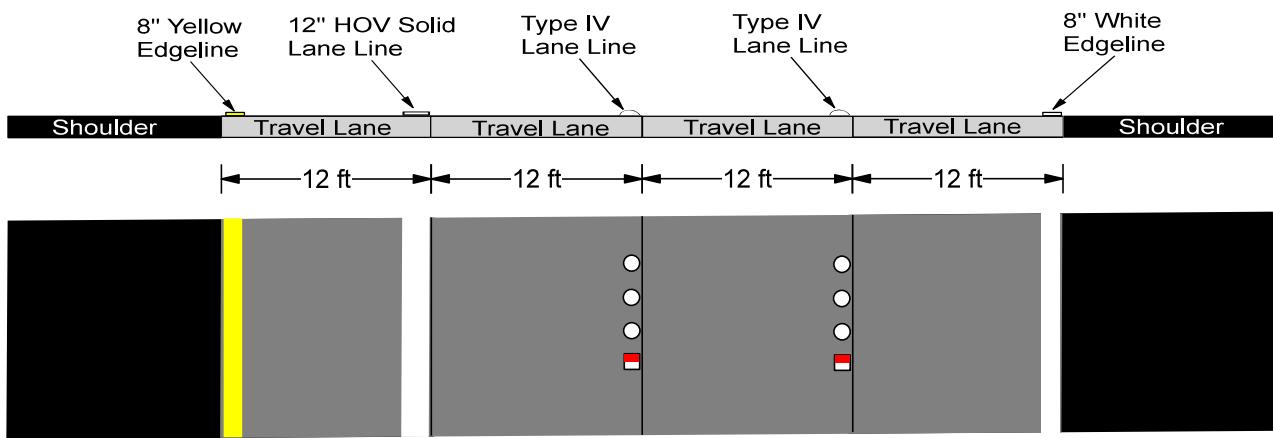

3 lanes plus HOV permissive enter/exit


Correct Marking for Controlled Access Facilities

Direction of Travel




Pavement Marking Placement

Correct

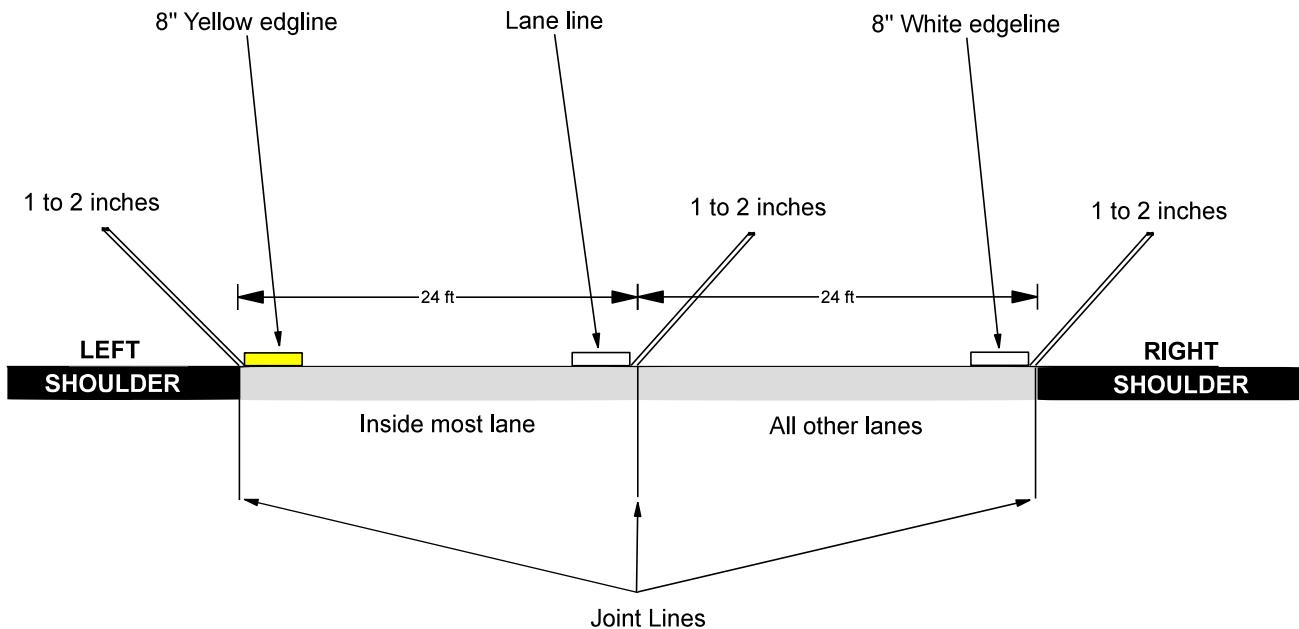


Edgelines are to be installed on the roadway, not the shoulder..


Incorrect

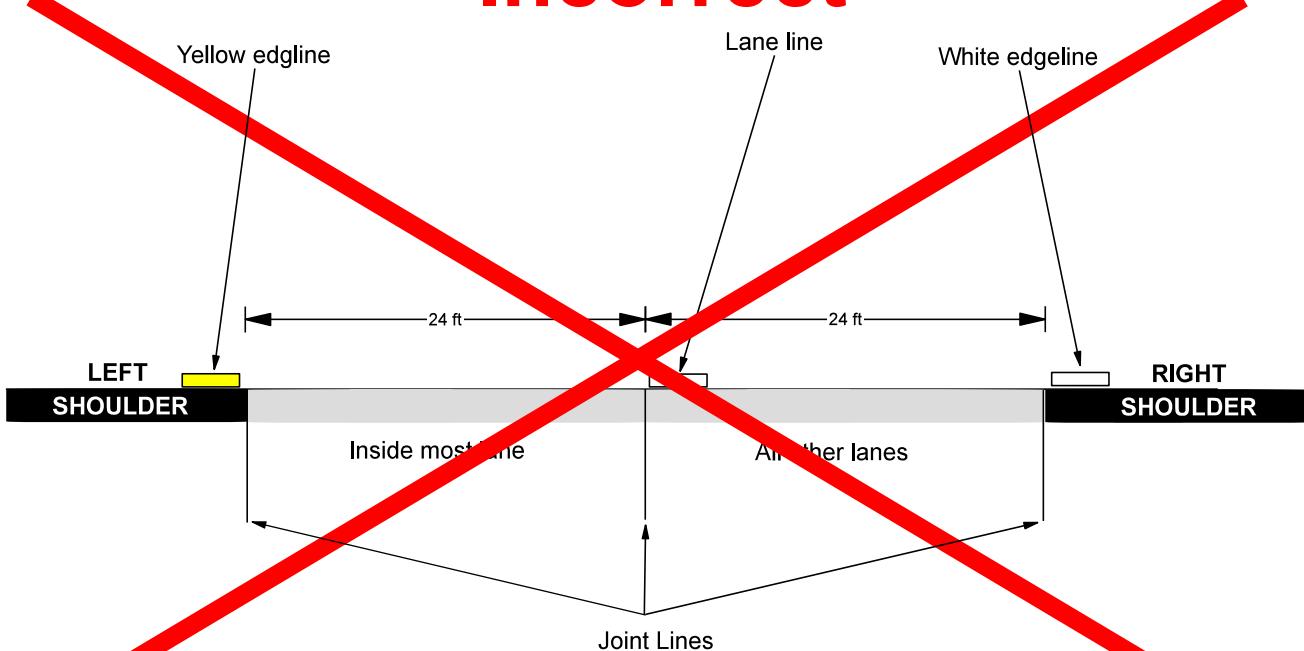


INCORRECT Marking locations

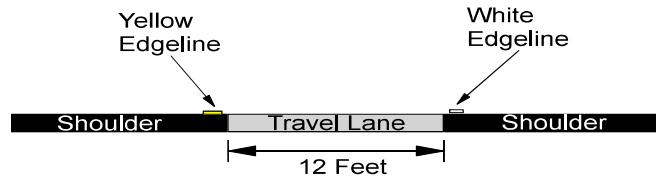


1 lane

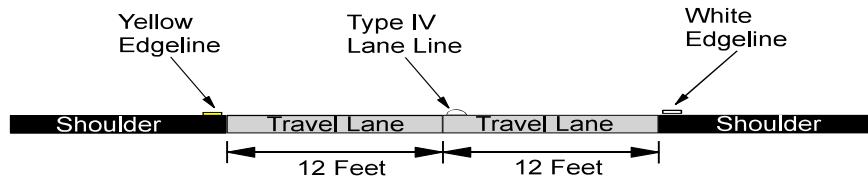

2 lanes

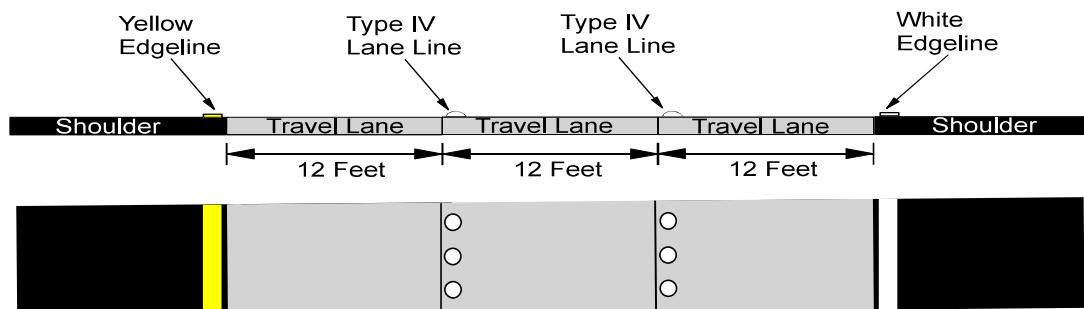

3 lanes

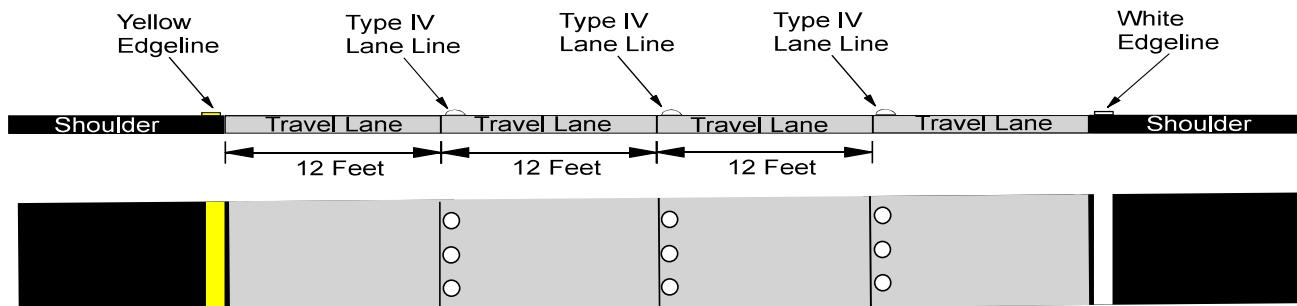


4 lanes



INCORRECT Marking locations


Examples of Skip Line and Channelizing Line Applications for Exit Ramp Markings (Sheet 1 of 2)

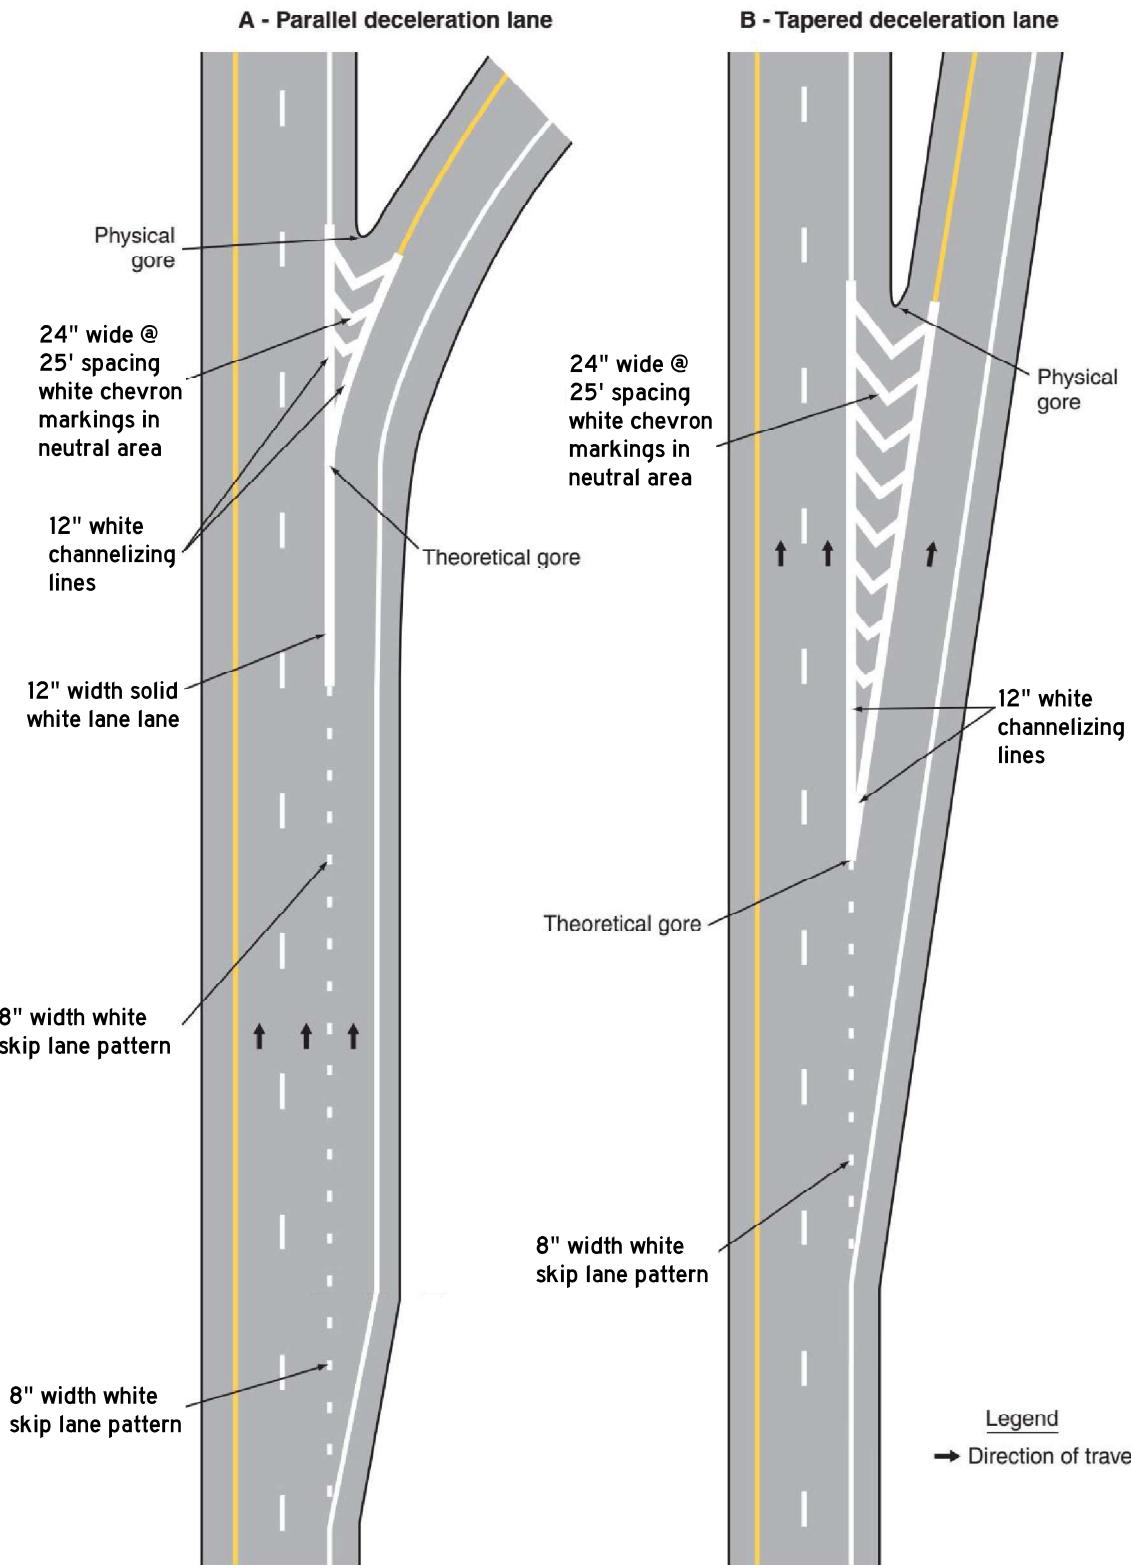

Sect. 3B.04

Examples of Skip Line and Channelizing Line Applications for Exit Ramp Markings (Sheet 2 of 2)


C – Parallel deceleration lane at a multi-lane exit ramp having an optional exit lane that also carries the through route

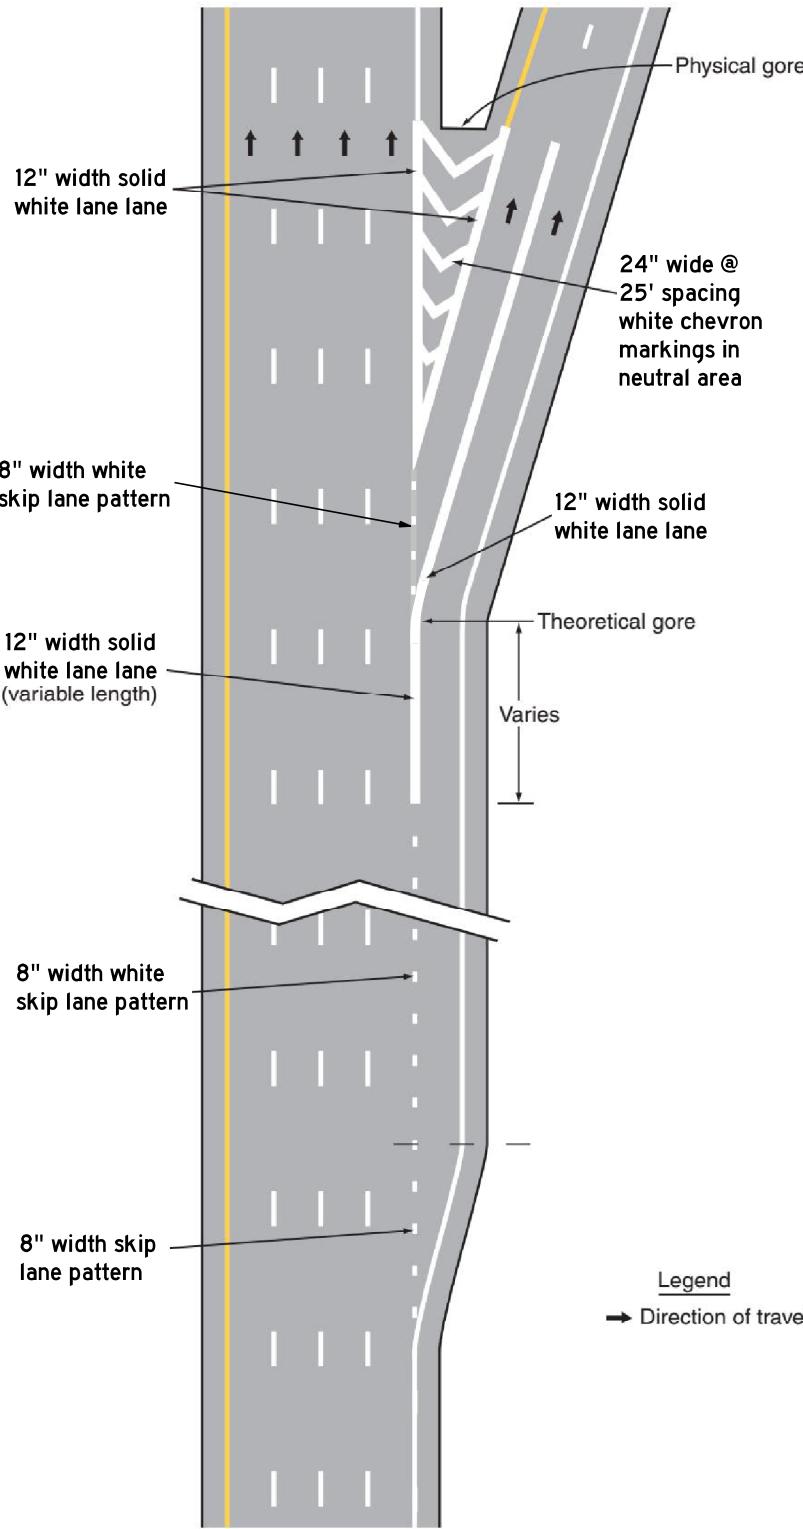

Legend
→ Direction of travel




Examples of Skip Line and Channelizing Line Applications for Entrance Ramp Markings

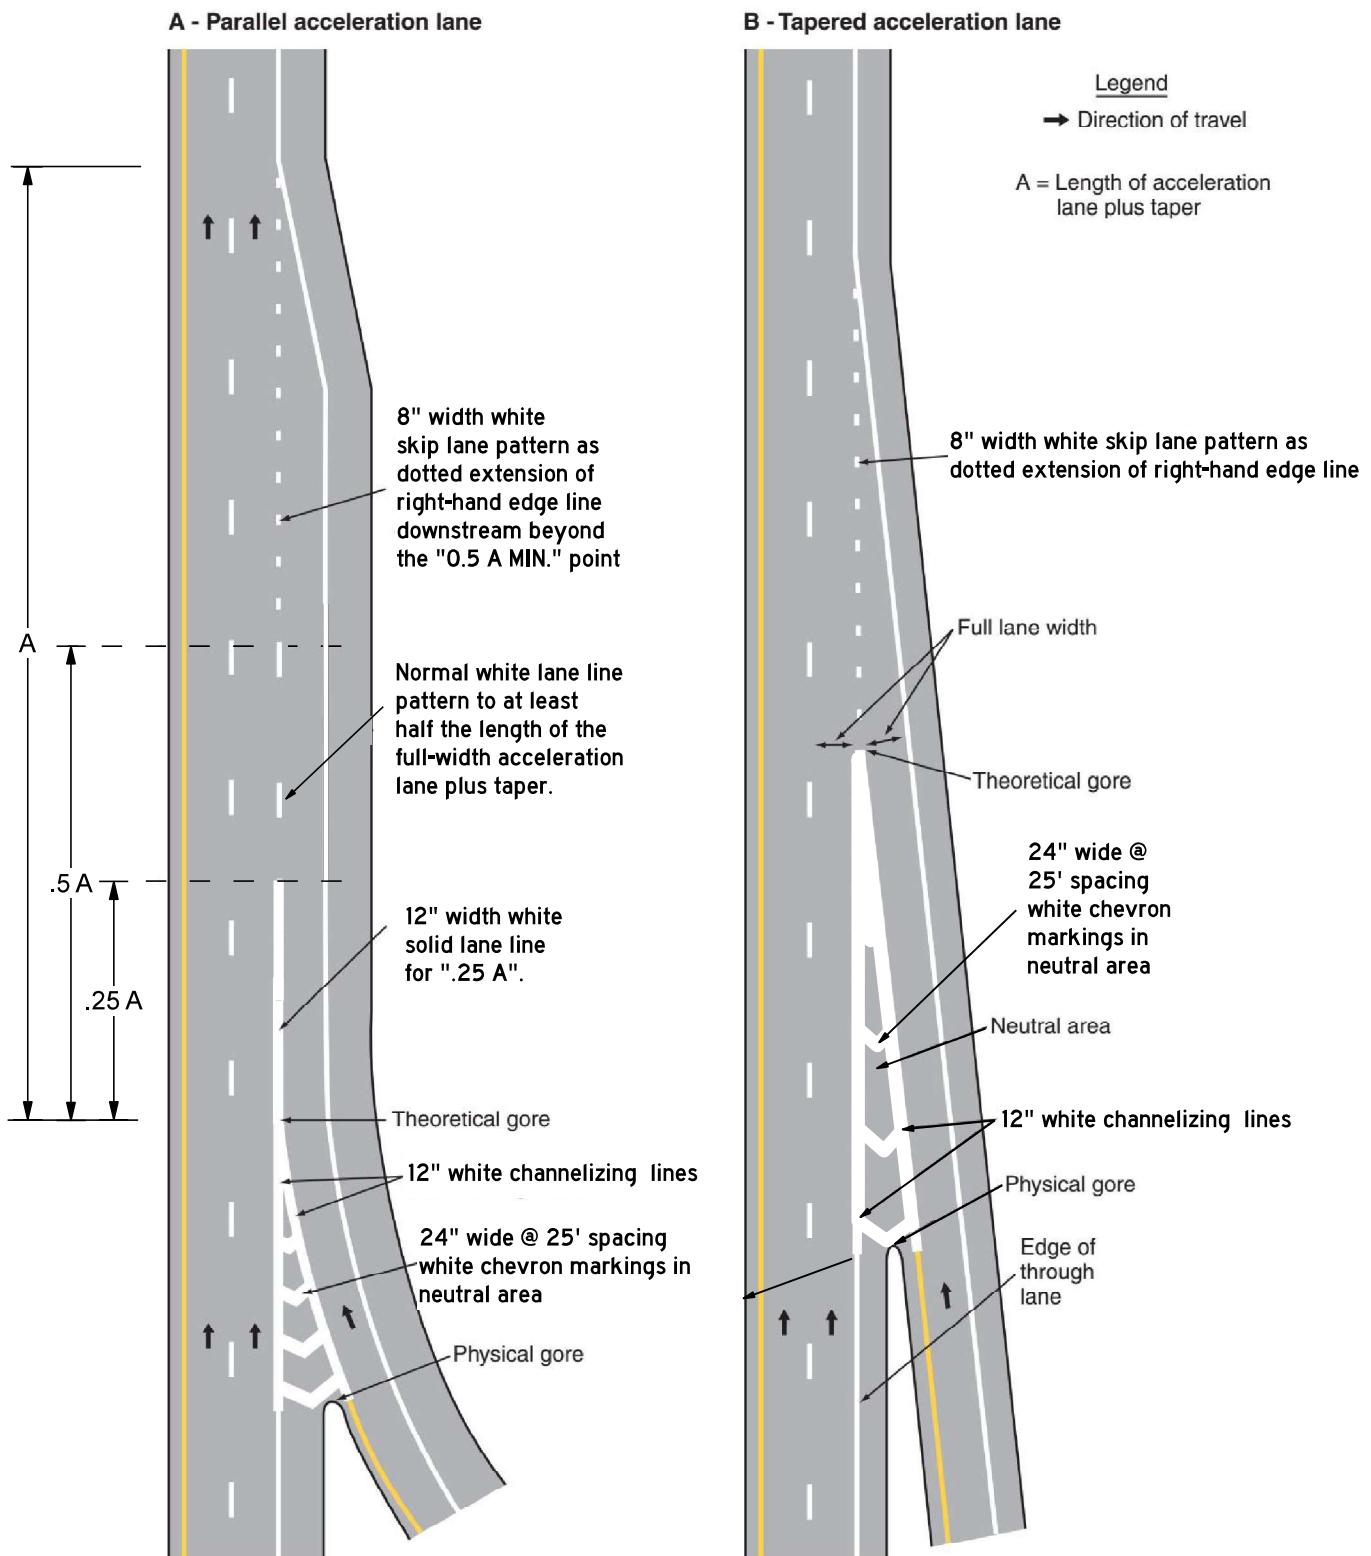


Examples of Drop Lane and Channelizing Line Applications for Lane-Drop Markings (Sheet 1 of 3)

A – Lane drop at a single lane exit ramp

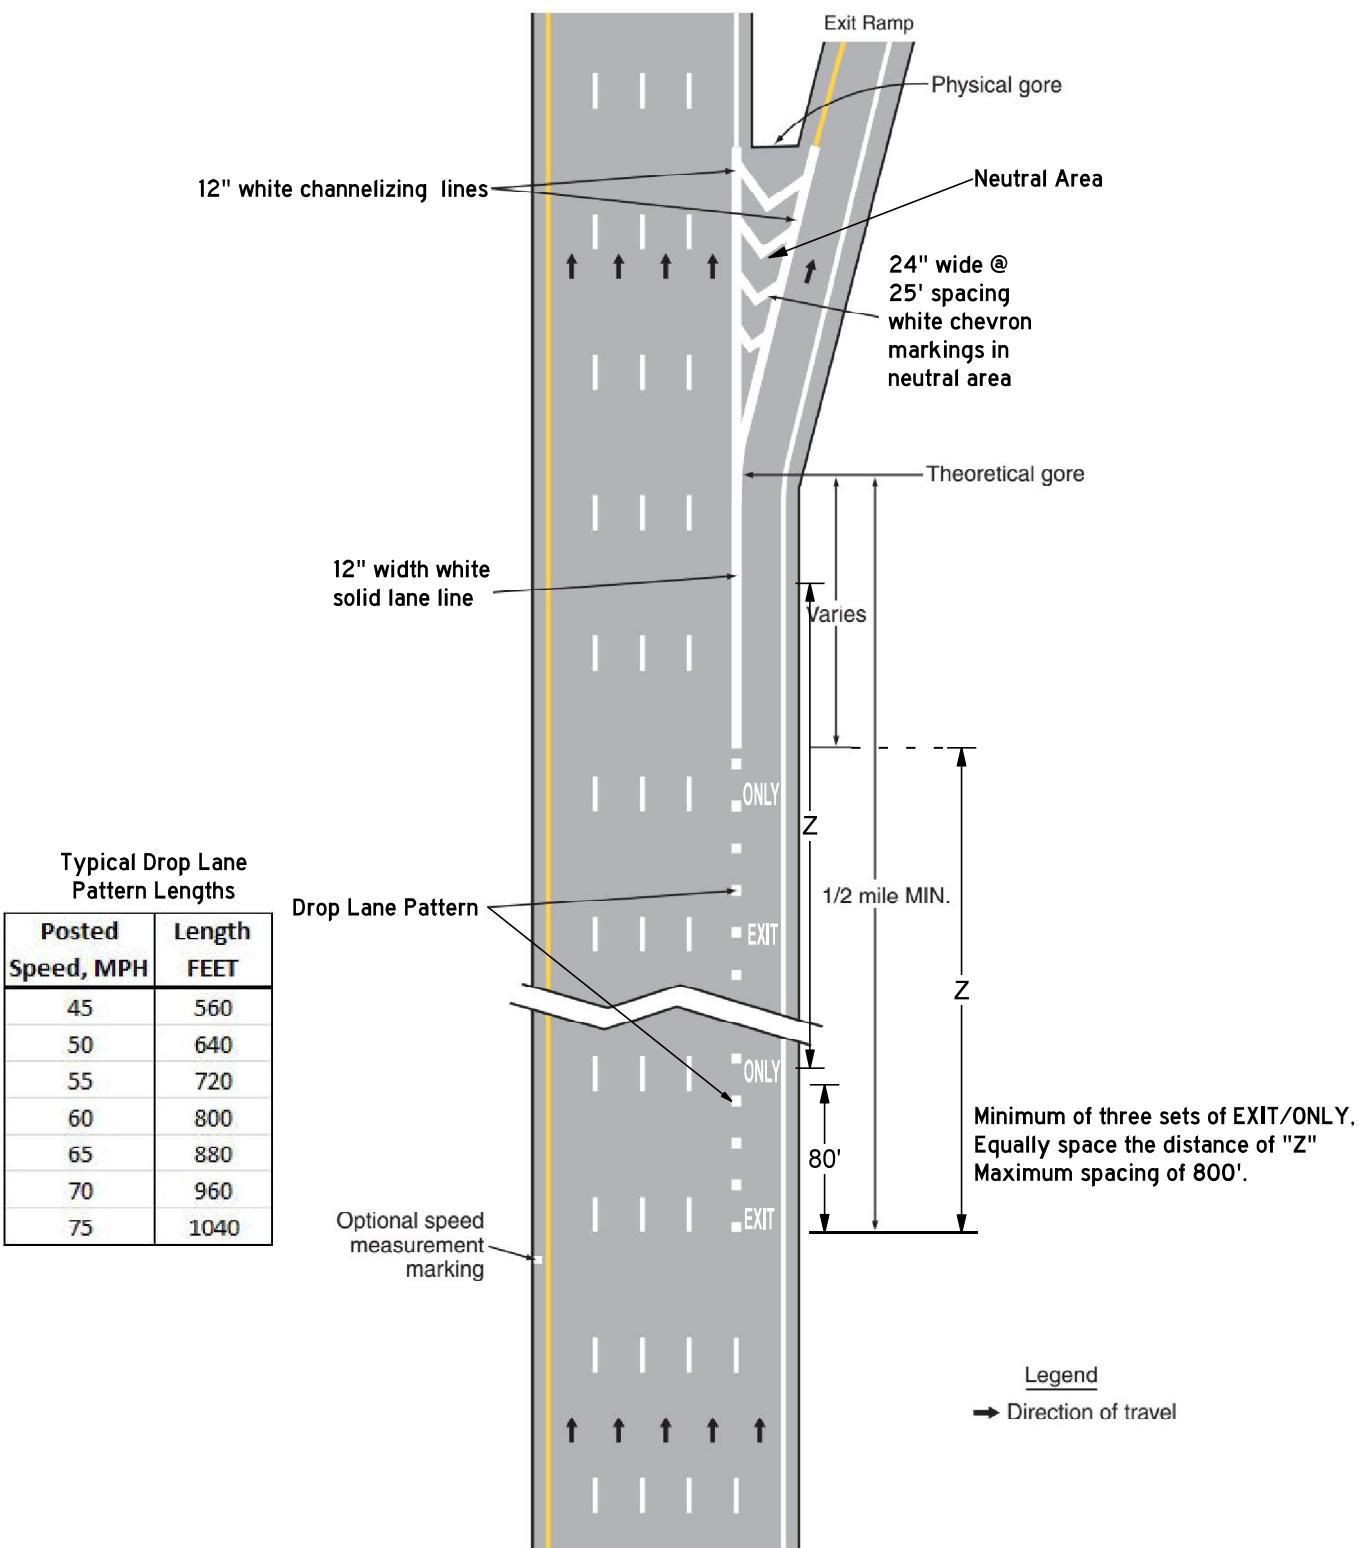


Examples of Drop Lane and Channelizing Line Applications for Lane-Drop Markings (Sheet 2 of 3)


B – Lane drop at a multi-lane exit ramp having an optional exit lane that also carries the through route

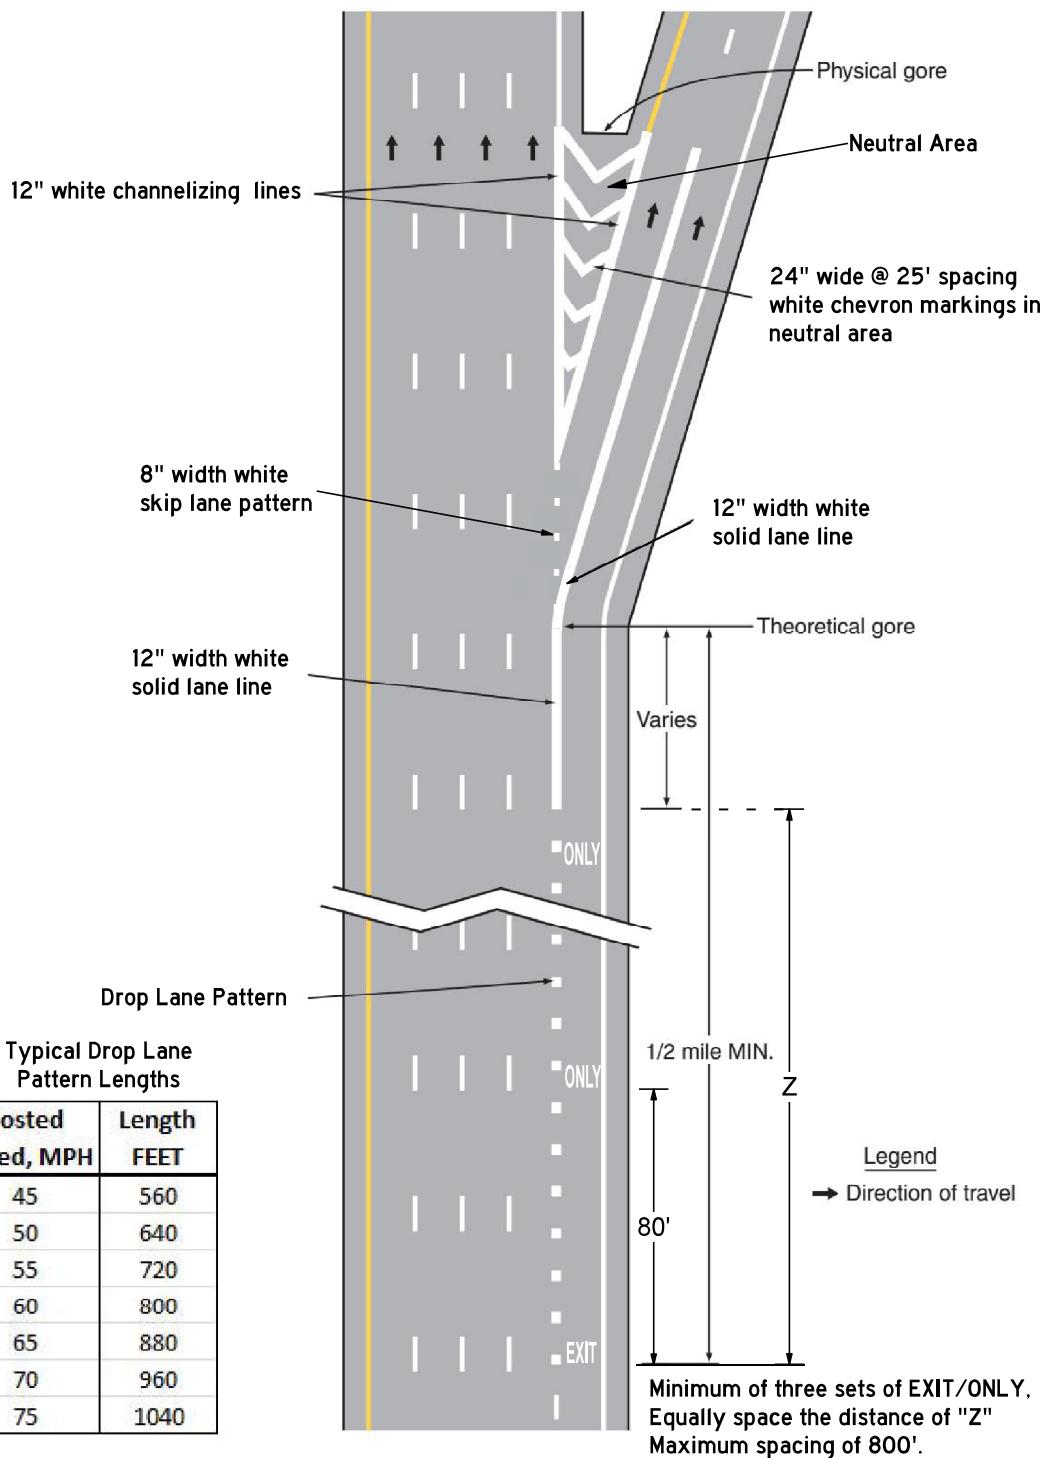

Examples of Drop Lane and Channelizing Line Applications for Lane-Drop Markings (Sheet 3 of 3)

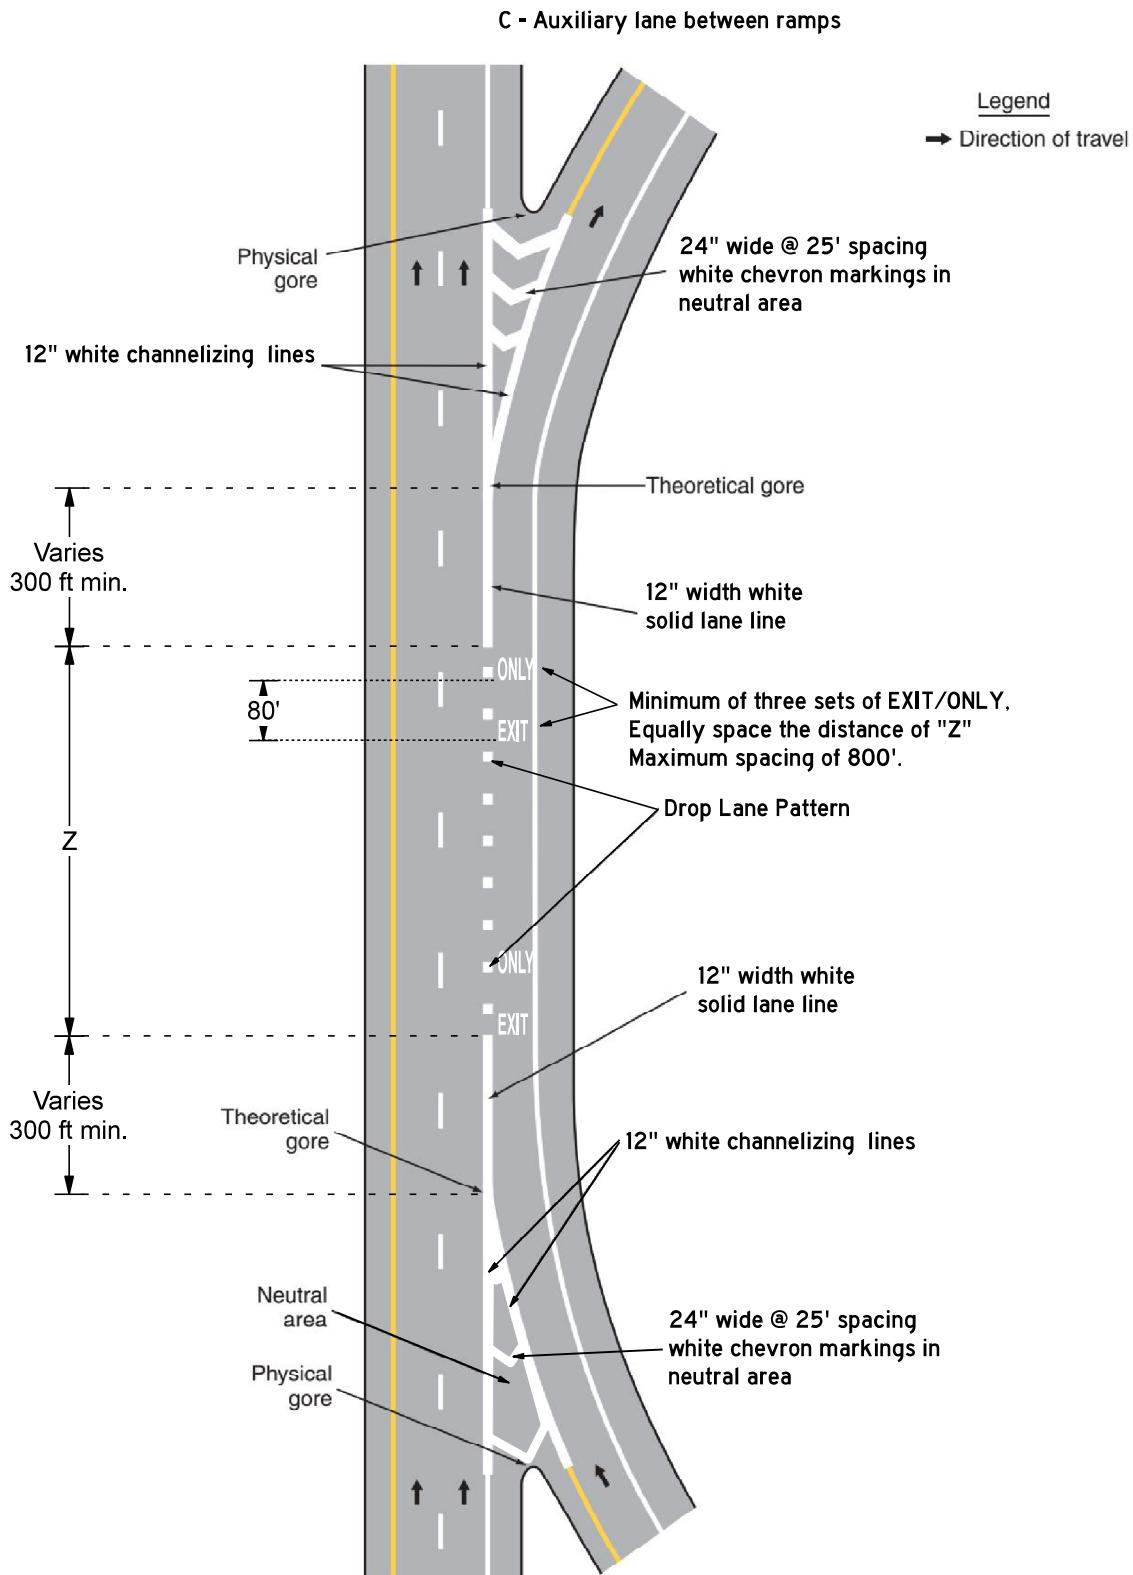

Edgeline and gore marking locations

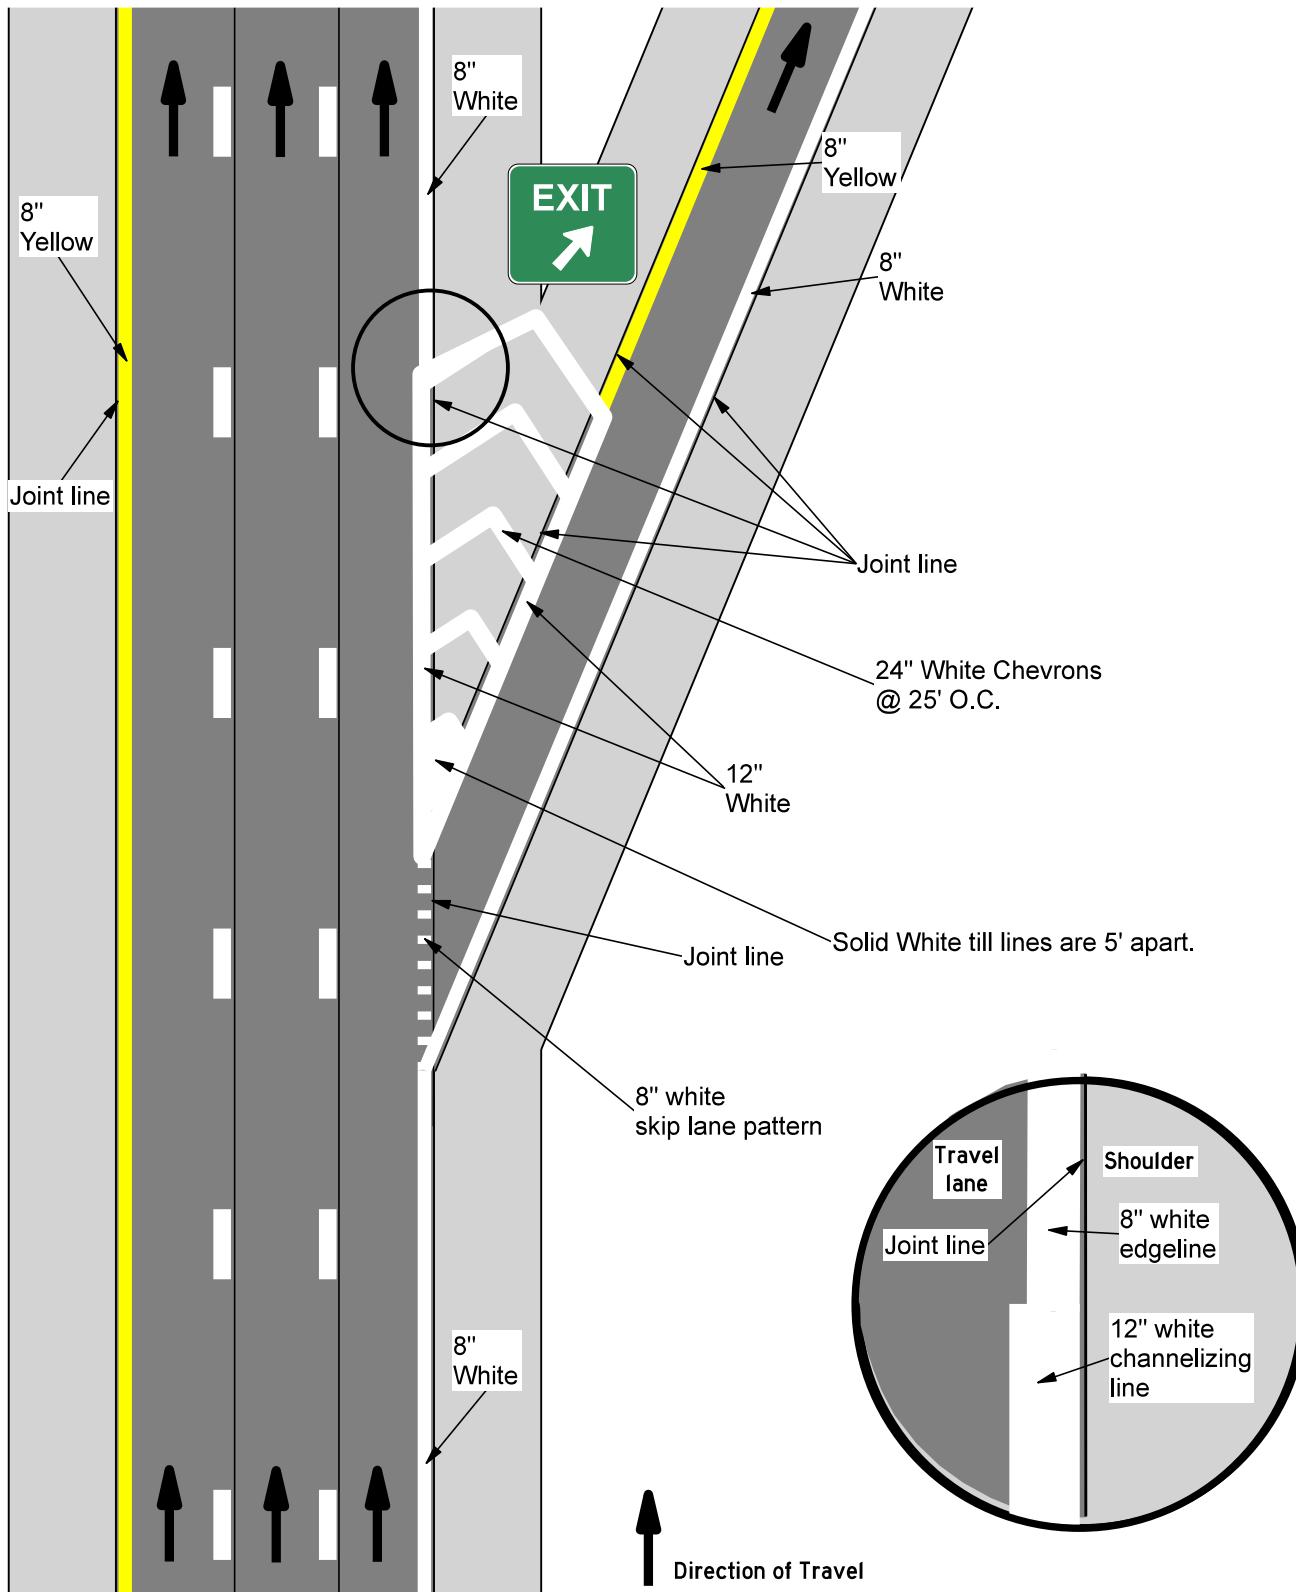


Clark County

Shifts and Tapers




Examples of Applications of Lane-Reduction Transition Markings.

A - Lane Reduction

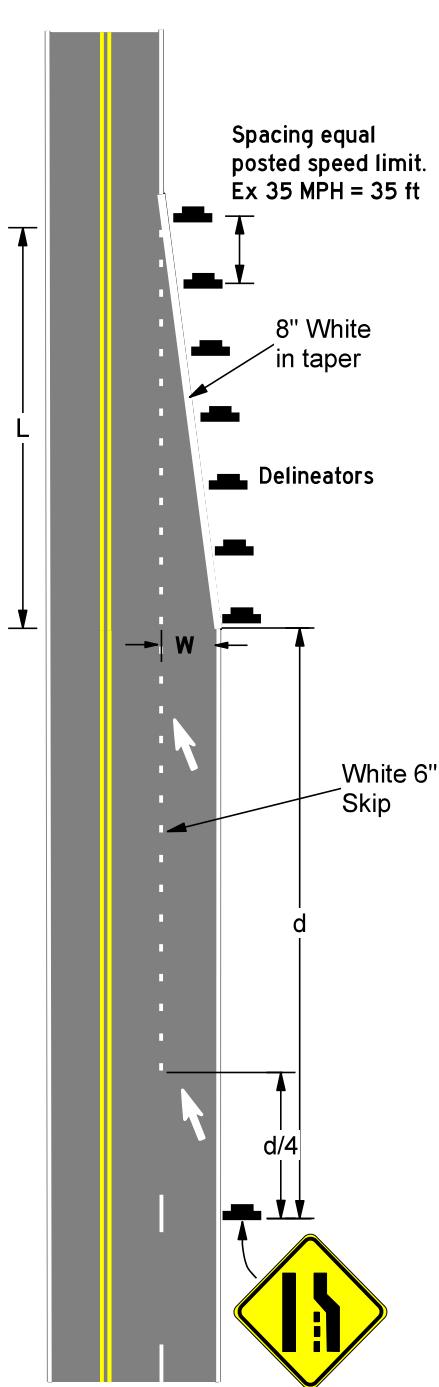

B - Lane Reduction with lateral shift to left

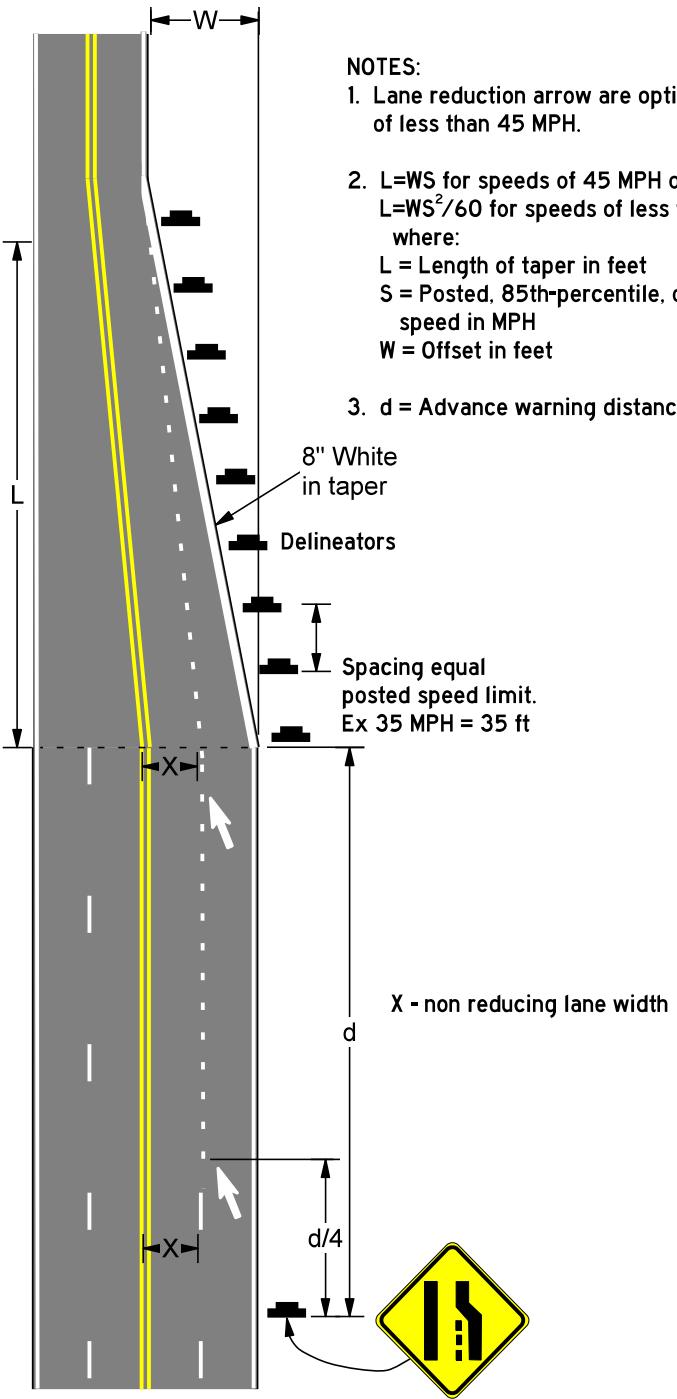

S, MPH	d, ft	$1/4d$, ft	$3/4d$, ft	L, ft for 12 ft
25	325	81	244	125
30	460	115	345	180
35	565	141	424	245
40	570	143	428	320
45	775	194	581	540
50	885	221	664	600
55	990	248	743	660
60	1100	275	825	720
65	1200	300	900	780
70	1250	313	938	840

Chart based on Section 2C.05



Lane transitions

Page 32-2

Change in offset, feet

Speed	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
15	4	8	11	15	19	23	26	30	34	38	41	45	49	53	56	60	64	68	71	75	79	83	86	90
20	7	13	20	27	33	40	47	53	60	67	73	80	87	93	100	107	113	120	127	133	140	147	153	160
25	10	21	31	42	52	63	73	83	94	104	115	125	135	146	156	167	177	188	198	208	219	229	240	250
30	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270	285	300	315	330	345	360
35	20	41	61	82	102	123	143	163	184	204	225	245	265	286	306	327	347	368	388	408	429	449	470	490
40	27	53	80	107	133	160	187	213	240	267	293	320	347	373	400	427	453	480	507	533	560	587	613	640
45	45	90	135	180	225	270	315	360	405	450	495	540	585	630	675	720	765	810	855	900	945	990	1035	1080
50	50	100	150	200	250	300	350	400	450	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200
55	55	110	165	220	275	330	385	440	495	550	605	660	715	770	825	880	935	990	1045	1100	1155	1210	1265	1320
60	60	120	180	240	300	360	420	480	540	600	660	720	780	840	900	960	1020	1080	1140	1200	1260	1320	1380	1440
65	65	130	195	260	325	390	455	520	585	650	715	780	845	910	975	1040	1105	1170	1235	1300	1365	1430	1495	1560
70	70	140	210	280	350	420	490	560	630	700	770	840	910	980	1050	1120	1190	1260	1330	1400	1470	1540	1610	1680

Change in offset, feet

Speed	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48
15	94	98	101	105	109	113	116	120	124	128	131	135	139	143	146	150	154	158	161	165	169	173	176	180
20	167	173	180	187	193	200	207	213	220	227	233	240	247	253	260	267	273	280	287	293	300	307	313	320
25	260	271	281	292	302	313	323	333	344	354	365	375	385	396	406	417	427	438	448	458	469	479	490	500
30	375	390	405	420	435	450	465	480	495	510	525	540	555	570	585	600	615	630	645	660	675	690	705	720
35	510	531	551	572	592	613	633	653	674	694	715	735	755	776	796	817	837	858	878	898	919	939	960	980
40	667	693	720	747	773	800	827	853	880	907	933	960	987	1013	1040	1067	1093	1120	1147	1173	1200	1227	1253	1280
45	1125	1170	1215	1260	1305	1350	1395	1440	1485	1530	1575	1620	1665	1710	1755	1800	1845	1890	1935	1980	2025	2070	2115	2160
50	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000	2050	2100	2150	2200	2250	2300	2350	2400
55	1375	1430	1485	1540	1595	1650	1705	1760	1815	1870	1925	1980	2035	2090	2145	2200	2255	2310	2365	2420	2475	2530	2585	2640
60	1500	1560	1620	1680	1740	1800	1860	1920	1980	2040	2100	2160	2220	2280	2340	2400	2460	2520	2580	2640	2700	2760	2820	2880
65	1625	1690	1755	1820	1885	1950	2015	2080	2145	2210	2275	2340	2405	2470	2535	2600	2665	2730	2795	2860	2925	2990	3055	3120
70	1750	1820	1890	1960	2030	2100	2170	2240	2310	2380	2450	2520	2590	2660	2730	2800	2870	2940	3010	3080	3150	3220	3290	3360



Lane shifts

Change in offset, feet

Speed	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24
15	2	4	6	8	9	11	13	15	17	19	21	23	24	26	28	30	32	34	36	38	39	41	43	45
20	3	7	10	13	17	20	23	27	30	33	37	40	43	47	50	53	57	60	63	67	70	73	77	80
25	5	10	16	21	26	31	36	42	47	52	57	63	68	73	78	83	89	94	99	104	109	115	120	125
30	8	15	23	30	38	45	53	60	68	75	83	90	98	105	113	120	128	136	143	150	158	165	173	180
35	10	20	31	41	51	61	71	82	92	102	112	123	133	143	153	163	174	184	194	204	214	225	235	245
40	13	27	40	53	67	80	93	107	120	133	147	160	173	187	200	213	227	240	253	267	280	293	307	320
45	23	45	68	90	113	135	158	180	203	225	248	270	293	315	338	360	383	405	428	450	473	495	518	540
50	25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575	600
55	28	55	83	110	138	165	193	220	248	276	303	330	358	385	413	440	468	496	523	550	578	605	633	660
60	30	60	90	120	150	180	210	240	270	300	330	360	390	420	450	480	510	540	570	600	630	660	690	720
65	33	65	98	130	163	195	228	260	293	325	358	390	423	455	488	520	553	585	618	650	683	715	748	780
70	36	70	105	140	175	210	245	280	315	350	385	420	455	490	525	560	595	630	665	700	735	770	805	840


Change in offset, feet

25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	
15	47	49	51	53	54	56	58	60	62	64	66	68	69	71	73	75	77	79	81	83	84	86	88	90
20	83	87	90	93	97	100	103	107	110	113	117	120	123	127	130	133	137	140	143	147	150	153	157	160
25	130	135	141	146	151	156	161	167	172	177	182	188	193	198	203	208	214	219	224	229	234	240	245	250
30	188	195	203	210	218	225	233	240	248	255	263	270	278	285	293	300	308	315	323	330	338	345	353	360
35	255	265	276	286	296	306	316	327	337	347	357	368	378	388	398	408	419	428	439	449	459	470	480	490
40	333	347	360	373	387	400	413	427	440	453	467	480	493	507	520	533	547	560	573	587	600	613	627	640
45	563	585	608	631	653	675	698	720	743	765	788	810	833	855	878	900	923	946	968	990	1013	1035	1053	1080
50	625	650	675	700	725	750	775	800	825	850	875	900	925	950	975	1000	1025	1050	1075	1100	1125	1150	1175	1200
55	688	715	743	770	798	825	853	880	908	935	963	990	1018	1045	1073	1100	1128	1155	1183	1210	1238	1265	1293	1320
60	750	780	810	840	870	900	930	960	990	1020	1050	1080	1110	1140	1170	1200	1230	1260	1290	1320	1350	1380	1410	1440
65	813	845	878	910	943	975	1008	1040	1073	1105	1138	1170	1203	1235	1268	1300	1333	1365	1398	1430	1463	1495	1528	1560
70	875	910	945	980	1015	1050	1085	1120	1155	1190	1225	1260	1295	1330	1365	1400	1436	1470	1505	1540	1575	1610	1645	1680


Sign Type Determination



EXIT v RAMP Advisory Speed Sign (W13-2) (W13-3)

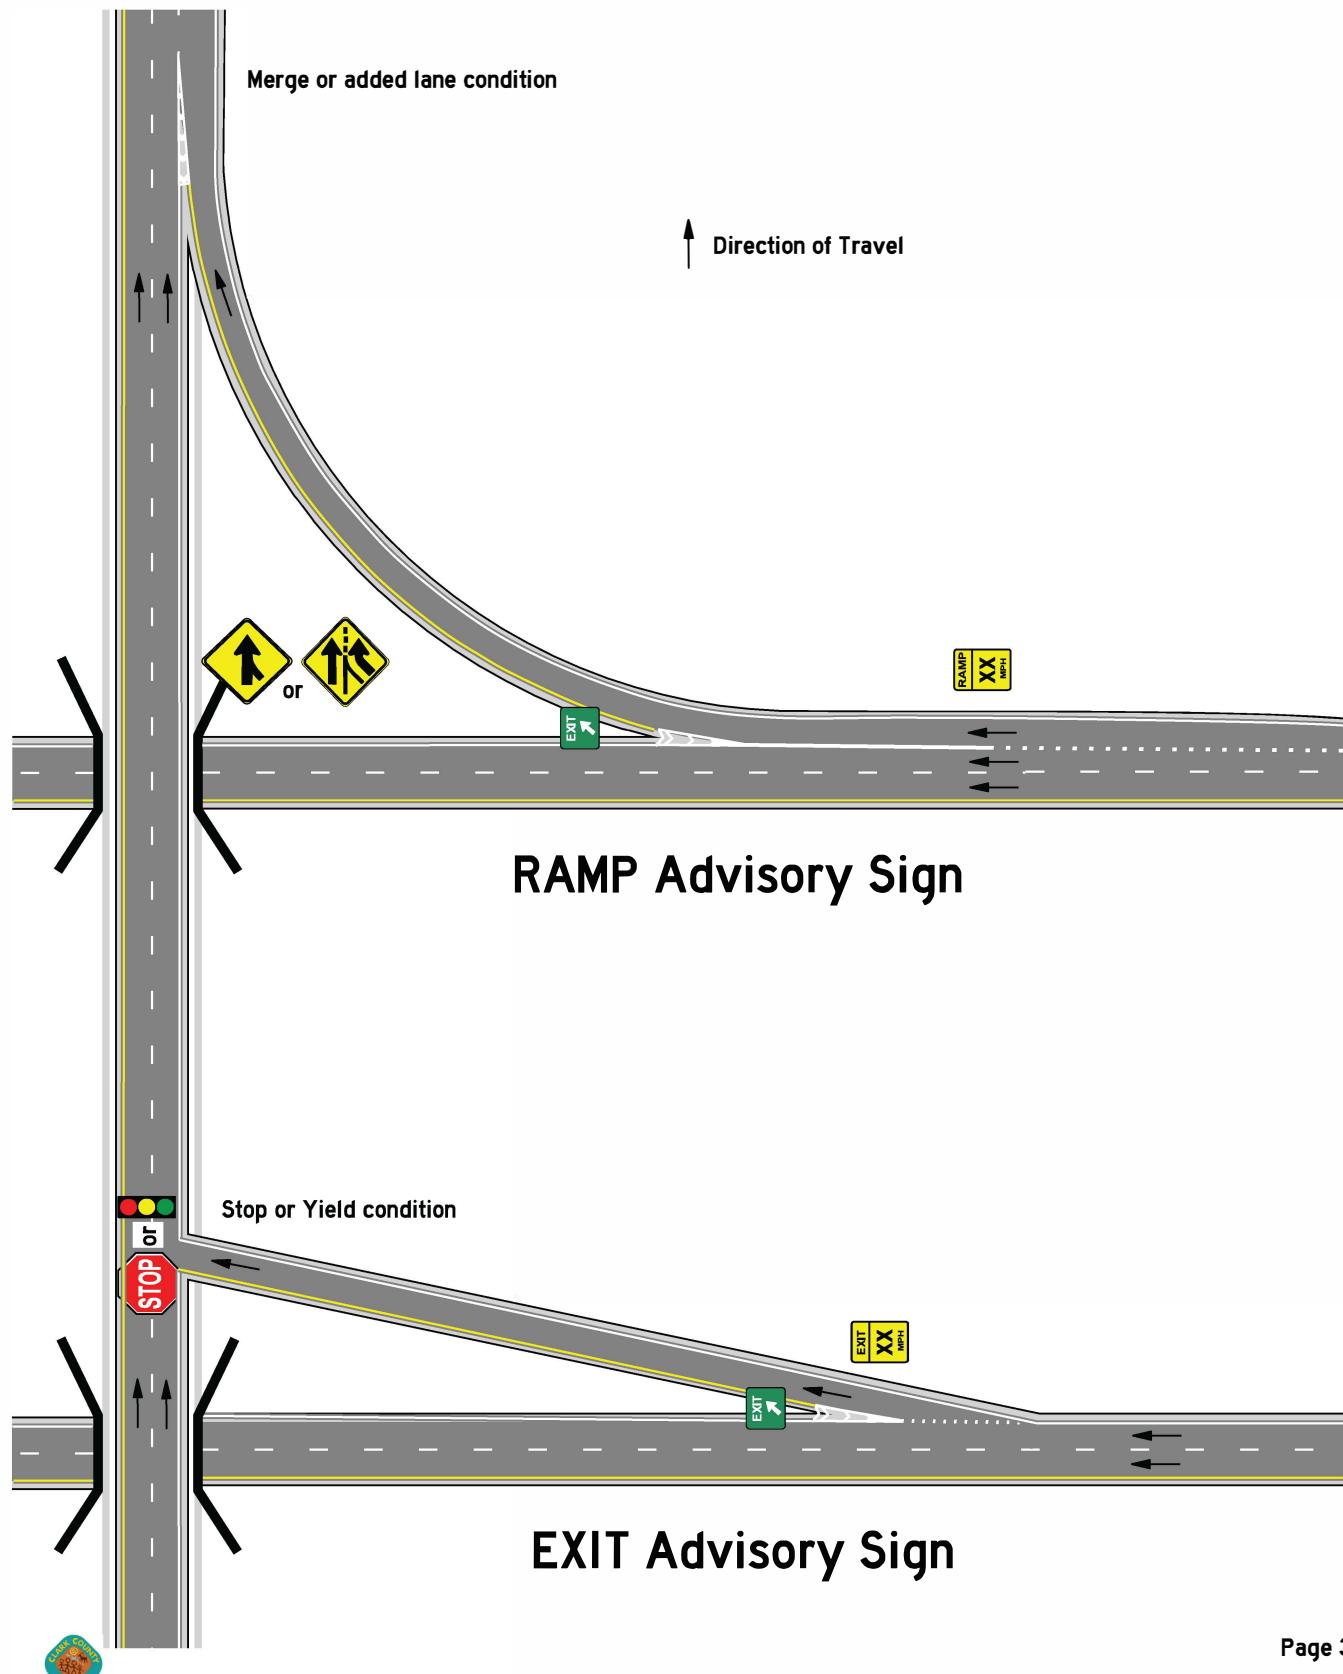

MERGE v ADDED LANE Sign

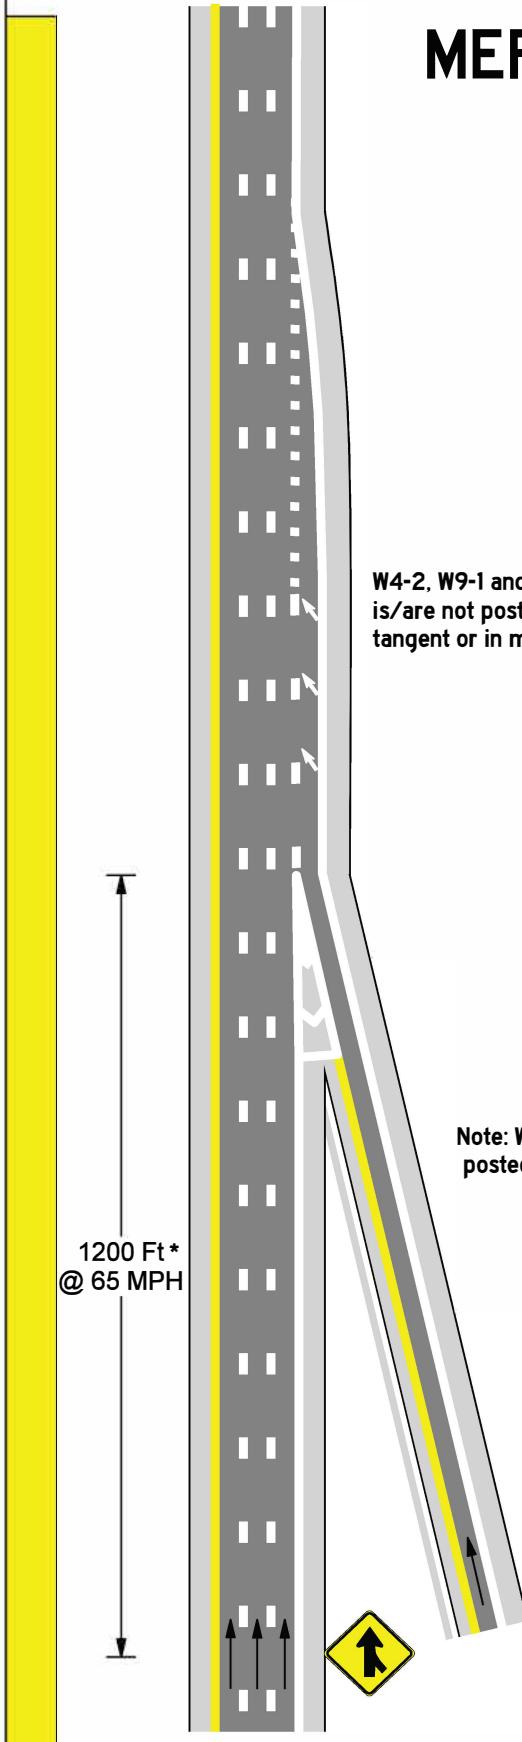

Merge - Use W4-1



Direction of Traffic

* Per Table 2C-4

Added Lane - Use W4-3

Page 33-2

