

16" X 16" MASONRY PILASTER DETAIL


2024 IBC

Clark County
Building Department
4701 W Russell Rd
Las Vegas, NV 89118
(702) 455-3000

Boulder City
Building Department
401 California Avenue
Boulder City, NV 89005
(702) 293-9282


Henderson
Building & Fire Safety Department
240 S. Water Street
Henderson, NV 89015
(702) 267-3650

Las Vegas
Building & Safety
495 S. Main Street
Las Vegas, NV 89101
(702) 229-6251

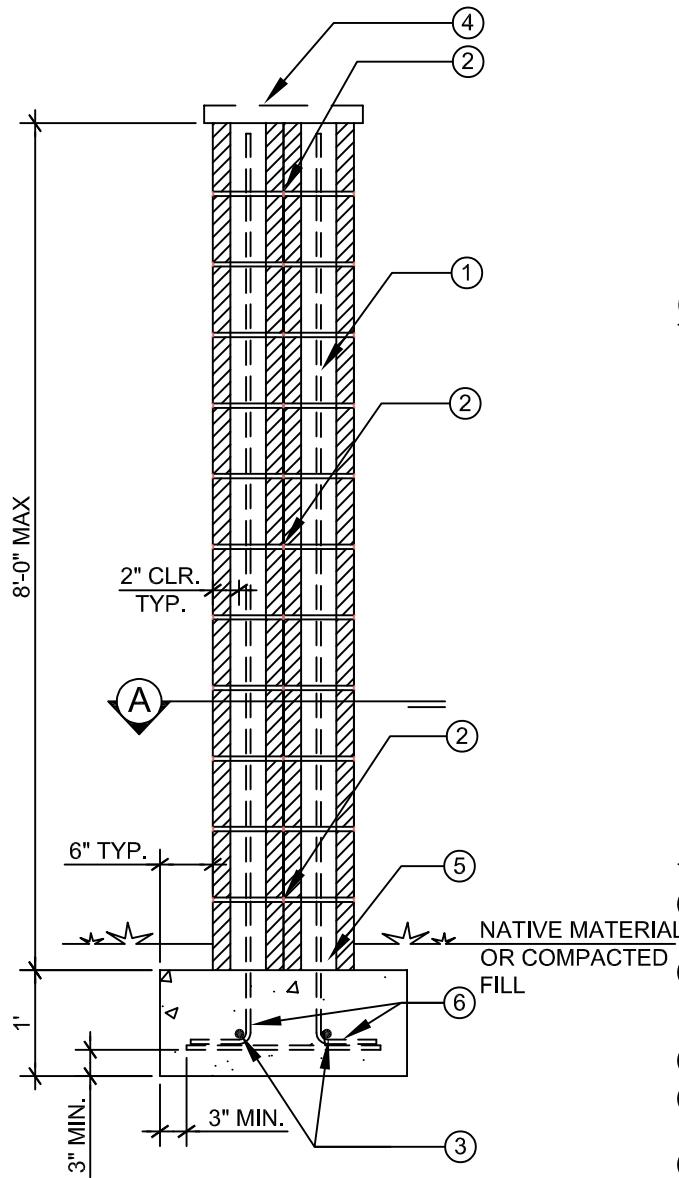

SECTION 'B'

NTS

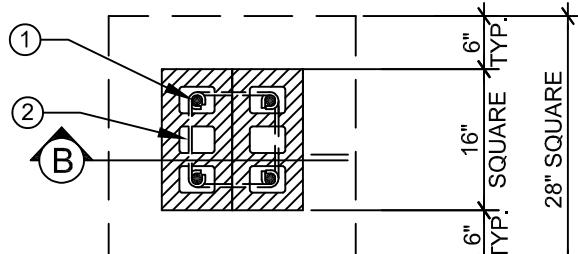

SECTION 'A'

NTS

GENERAL NOTES:

1. ALL WORK SHALL CONFORM TO THE 2024 IBC WITH SNA.
2. CONCRETE MASONRY SHALL COMPLY WITH THE FOLLOWING:
 - A. ASTM C 90, $f_m = 2,000$ PSI
 - B. MORTAR: TYPE M OR S
 - C. GROUT SHALL CONFORM TO ASTM C 476, 2000 PSI MIN.
3. FOUNDATION CONCRETE SHALL BE 4,500 PSI, TYPE V CEMENT AND 0.45 WATER TO CEMENT RATIO
4. ALL REINFORCING STEEL SHALL BE ASTM A615-60
5. LAP VERTICAL STEEL 24 INCHES MINIMUM.
6. SITE PLAN SHALL BE SUBMITTED FOR REVIEW BEFORE THE BUILDING PERMIT CAN BE ISSUED.

KEYNOTES: #

- #4 VERTICAL REBAR AT EACH CELL CORNER, SOLID GROUTED
- #3 REBAR, TIE IN MINIMUM 8-INCH BOND BEAM AT TOP, MIDDLE, AND BOTTOM. PROVIDE A 2-INCH MINIMUM GROUT COVER AT ALL SIDES OF REBAR.
- (2) #4 CONTINUOUS REBAR EACH WAY
- FINISH TOP OF COLUMN WITH A CAP BLOCK OR WITH CONCRETE FOR WATER RUN-OFF.
- GROUT ALL CELLS AND CAVITIES SOLID BELOW GRADE.
- STANDARD 90° HOOK WITH 9" MIN., LENGTH

Mesquite
Building Department
10 East Mesquite Blvd.
Mesquite, NV 89027
(702) 346-2835

North Las Vegas
Building Safety
2250 Las Vegas Blvd. N
N. Las Vegas, NV 89030
(702) 633-1577

Pahrump
Nye County Building Department
2041 E. Calvada Boulevard North
Pahrump, NV 89048
(775) 751-3373

Clark County School District
Building Department
1180 Military Tribute Place
Henderson, NV 89074
(702) 799-7605